





UniFLEX™ SPEC 55 SERIES ELECTRIC STRIKE, GRADE 1 HEAVY DUTY - Factory tested 2500 lbs

STANDARD ANSI 4-7/8" STRIKE PREP - NO CENTERLINE RELOCATION REQUIRED. 5 YEAR LIMITED WARRANTY


One strike with choice of interchangeable faceplates for cylindrical and mortise locksets with or without deadbolts. Designed for new and retrofit hollow metal frame installations. *Frame face modification required.




55-A




55-B




55-C



55-D



55-E



55-F

- Up to 3/4" Latchbolt and 1" Deadbolt
- Field Reversible, Failsafe/Failsecure
- 1/8" Horizontal alignment adjustment
- Dual Voltage 12/24VDC
- Exceeds 1,000,000 cycles
- Factory tested 2500 lbs static strength
- UL tested 1500 lb Static strength
- 70 ft-lb Dynamic strength
- ANSI/BHMA A156.31 Grade 1
- Internal Solenoid, No Heat in Keeper
- All parts stainless steel
- Non-handed



Warrack Hersey Tested according to:
UL 10C, 3 Hr Fire Rated, 4' x 8' single door
us NFPA-252



CAN4-S104 (ULC-S104)
(Fail-Secure only).
SECURITY UL 1034
Burglary-Resistant
BP10254
40WH

SPECIFY MODEL

LIST

Lockset compatibility: For locksets not listed below, see UniFLEX™ 55 Series datasheet, page 5, faceplate dimension
Deadbolt Application: 55-D, 55-E and 55-F, door will not close with deadbolt extended

MODEL Application

55-A	Compatible locks with all cylindrical locksets with up to 5/8" latch.	420.00
55-B	Mortise locksets and exit mortise devices with or without a deadlatch located below the latchbolt. <i>Accurate, Arrow, Best, Corbin Russwin, Dorma, Falcon, Marks, Sargent, Yale.</i>	440.00
55-C	Mortise locksets and mortise exit devices with or without a deadlatch located above the latchbolt. <i>SDC, Schlage, Baldwin, Hager</i>	440.00
55-D	Mortise locksets with a deadbolt and deadlatch located below the latchbolt. <i>Accurate, Arrow, Best, Corbin Russwin, Dorma, Falcon, Marks, Sargent, Yale.</i>	460.00
55-E	Mortise lockset with deadbolt and no deadlatch feature. <i>Baldwin.</i>	460.00
55-F	Mortise locksets with a deadbolt and a deadlatch located above the latchbolt. <i>SDC, Schlage, Hager.</i>	460.00

SPECIFY FINISH

Add to List

U 630 Dull Stainless Steel (std)			N/C
	G 612 Dull Bronze	P 625 Bright Chrome	40.00
D 606 Dull brass	H 613 Oil Rubbed Bronze	Q 626 Dull Chrome	40.00

SPECIFY MONITORING OPTIONS

Add to List

LBM/LCM available with 55-A, 55-B, 55-C; LBM/LCM/DBM available with 55-D, 55-E, 55-F

LBM	Latchbolt Monitor. Signals the door is closed and latched or unlatched and open. Non-handed.	60.00
LBM/LCM	Door Secure Monitor. Signals door is closed latched and the keeper is deadlocked. Also signals the door is unlatched or unlocked. Non-handed.	120.00
DBM-L	Deadbolt Monitor, Left Hand (Available with LCM and LBM. For D, E & F functions only)	60.00
DBM-R	Deadbolt Monitor, Right Hand (Available with LCM and LBM. For D, E & F functions only)	60.00

Accessories

Add to List

RMB	Buzzer, 12/24V. Indicates strike is energized	40.00
BR64XL	Wire Lead Rectifier. Converts AC to DC	25.00
LT	Tri-Color LED, red or green or amber. Indicates strike energized per field wiring	30.00

Monitoring Configurations

55-A, 55-B, 55-C:
LBM
LBM/LCM

55-D, 55-E, 55-F:
LBM
LBM/LCM
LBM/LCM/DBM




SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com

Price List Effective October 1, 2012



UniFLEX™ UNIVERSAL STRIKE — MULTI APPLICATION PACK

LIST

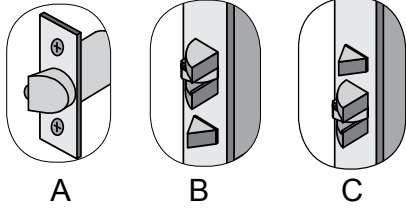


Application

- Adaptable to all 55-A, 55-B, 55C applications.
- Strike body and 5 faceplates
- For new and retrofit installation
- No relocation of the centerline.
- Non-handed

Operation

After releasing the latchbolt, the keeper returns to the locked position.

Finish: 630 Dull Stainless Steel



MODEL Application

55-ABC **Universal Strike** for cylindrical locks, mortise locks without deadbolts and mortise exit devices **460.00**
including: *SDC, Accurate, Arrow, Baldwin, Best, Corbin Russwin, Dorma, Falcon, Hager, Marks, Sargent, Schlage, Yale.*

Lockset compatibility: For locksets not listed, see UniFLEX™ 55 Series datasheet, page 5, faceplate dimension

Price List Effective October 1, 2012



30 SERIES RIM MOUNT ELECTRIC STRIKES

Distributor Discount Code **FK**

Stainless steel electric strike for rim mount exit devices. Strike is non-handed, fail secure is standard with fail safe optional. Standard finish is stainless steel 630 (U). Check template to ensure compatibility.



30-4

SPECIFY MODEL		LIST
30-4-12	Stainless steel electric strike designed for rim-type exit devices 12VDC@ 0.51Amp	600.00
30-4-24	Stainless steel electric strike designed for rim-type exit devices 24VDC@ 0.25Amp	600.00
SPECIFY FINISH		Add to List
U	630 Dull Stainless Steel (Standard)	N/C
OPTIONS		Add to List
FS	Failsafe operation	35.00
	BR64XL Rectifier	25.00
LCBMA-30	Latch & locking cam monitor	215.00

Not Compatible with SDC S6000
See S6000 Electric Trim page 30

