

Price List Effective February 1, 2017



920



920P



920PW



The **920 Series EntryCheck™** stand-alone digital keypad is designed to control access of a single entry point with up to 500 users. Each user is assigned a personal identification number (PIN). Keypad entry of a valid one to six digit code activates one or both of the output relays which releases an electric door lock. Heavy Cast Vandal Resistant Housing. Heavy Cast Metal Blue Backlit Keys.

**ELECTRICAL SPECIFICATIONS**


<b>Voltage</b>	12/24 VAC/DC — 5-16 VDC for Wiegand (920PW)
<b>Current</b>	30mA typical, 150mA maximum - 60mA max for Wiegand
<b>Outputs (920/920P)</b>	Relay 1 - SPDT 5 Amps @ 30VDC Relay 2 - SPDT 2 Amps @ 30VDC Switch to Common Outputs 3 & 4 – 100mA @ 30VDC
<b>Operating Temperature</b>	-20°F to + 130°F (-30°C to + 54°C)
<b>Operating Humidity</b>	5% to 95% non-condensing
<b>Housing</b>	3"W x 5-3/4"H x 1-7/16"D

<b>920</b>	Stand alone digital keypad	<b>182.00</b>
<b>920P</b>	Stand alone digital keypad with Prox Reader	<b>404.00</b>
<b>920PW</b>	Digital keypad with Prox Reader, Wiegand output	<b>404.00</b>

CARDS, KEY FOBs and TAGS see page 65

Access Control

SECURITY DOOR CONTROLS  
801 Avenida Acaso • Camarillo, CA 93012  
Email: Service@sdsecurity.com • www.sdsecurity.com

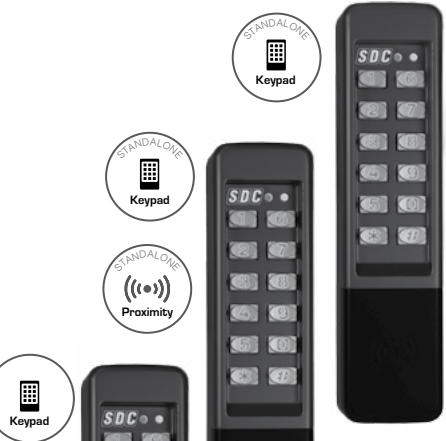

923



923P



923PW



The **923 Series EntryCheck™** narrow stand-alone digital keypad is designed to control access of a single entry point with up to 500 users. Each user is assigned a personal identification number (PIN). Keypad entry of a valid one to six digit code activates one or both of the output relays which releases an electric door lock. Heavy Cast Vandal Resistant Housing. Heavy Cast Metal Blue Backlit Keys.

**ELECTRICAL SPECIFICATIONS**

<b>Voltage</b>	12/24 VAC/DC — 5-16 VDC for Wiegand
<b>Current</b>	30mA typical, 150mA maximum - 60mA max for Wiegand
<b>Outputs (923/923P)</b>	Relay 1 - SPDT 5 Amps @ 30VDC Relay 2 - SPDT 2 Amps @ 30VDC Switch to Common Outputs 3 & 4 – 100mA @ 30VDC
<b>Operating Temperature</b>	-20°F to + 130°F (-30°C to + 54°C)
<b>Operating Humidity</b>	5% to 95% non-condensing
<b>Housing</b>	1-3/4"W x 7-5/16"H x 1-3/8"D

<b>923</b>	Stand alone digital keypad, narrow	<b>207.00</b>
<b>923P</b>	Stand alone digital keypad, narrow, with Prox Reader	<b>492.00</b>
<b>923PW</b>	Digital keypad, narrow, with Prox Reader, Wiegand output	<b>492.00</b>

CARDS, KEY FOBs and TAGS see page 65

# 921P/924P INDOOR/OUTDOOR 2-PIECE EntryCheck™

Distributor Discount Code **JK LIST**



The **921P** and the **924P EntryCheck™** stand-alone digital keypad with Prox Reader and Controller (2-piece configuration) are designed to control access of a single entry point with up to 500 users. Each user is assigned a personal identification number (PIN). Keypad entry of a valid one to six digit code activates one or both of the output relays which releases an electric door lock. Heavy Cast Vandal Resistant Housing. Heavy Cast Metal Blue Backlit Keys.

### ELECTRICAL SPECIFICATIONS

<b>Voltage</b>	12/24 VAC/DC
<b>Current</b>	60mA typical, 150mA maximum
<b>Outputs</b>	Relay 1 - SPDT 5 Amps @ 30VDC Relay 2 - SPDT 2 Amps @ 30VDC Switch to Common Outputs 3 & 4 - 100mA @ 30VDC
<b>Operating Temperature</b>	-20°F to + 130°F (-30°C to + 54°C)
<b>Operating Humidity</b>	5% to 95% non-condensing
<b>Housing</b>	<b>921P:</b> 3"W x 5-3/4"H x 1-7/16"D <b>924P:</b> 1-3/4"W x 7-5/16"H x 1-3/8"D

<b>921P</b>	Stand alone, surface mount digital keypad, with Prox Reader and Controller	<b>596.00</b>
<b>924P</b>	Stand alone, surface mount digital keypad, narrow, with Prox Reader and Controller	<b>621.00</b>

**CARDS, KEY FOBS and TAGS** see page 65

# 925/925P/925PW INDOOR/OUTDOOR Shroud EntryCheck™

Distributor Discount Code **JK LIST**



925



925P




925PW

The **925 Series EntryCheck™** elevates the robustness of the indoor/outdoor 920 keypad with a heavy metal privacy and rain shroud. Perfect for post mount applications.

### ELECTRICAL SPECIFICATIONS (KEYPAD)

<b>Voltage</b>	12/24 VAC/DC — 5-16 VDC for Wiegand (925PW)
<b>Current</b>	30mA typical, 150mA maximum - 60mA max for Wiegand
<b>Outputs (925/925P)</b>	Relay 1 - SPDT 5 Amps @ 30VDC Relay 2 - SPDT 2 Amps @ 30VDC Switch to Common Outputs 3 & 4 - 100mA @ 30VDC
<b>Operating Temperature</b>	-20°F to + 130°F (-30°C to + 54°C)
<b>Operating Humidity</b>	5% to 95% non-condensing
<b>Shroud Dimension</b>	4-1/16"W x 6-1/8"H x 2-5/8"D



<b>925</b>	Stand alone digital keypad with privacy shroud	<b>281.00</b>
<b>925P</b>	Stand alone digital keypad with Prox Reader and privacy shroud	<b>504.00</b>
<b>925PW</b>	Digital keypad with Prox Reader, Wiegand output, and privacy shroud	<b>504.00</b>

**CARDS, KEY FOBS and TAGS** see page 65



**SECURITY DOOR CONTROLS**  
801 Avenida Acaso • Camarillo, CA 93012  
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective February 1, 2017