



926

The **925 Series EntryCheck™** elevates the robustness of the indoor/outdoor 920 keypad with a heavy metal privacy and rain shroud. Perfect for post mount applications.


**ELECTRICAL SPECIFICATIONS (KEYPAD)**

<b>Voltage</b>	12/24 VAC/DC
<b>Current</b>	30mA typical, 150mA maximum
<b>Outputs</b>	Main Relay: Form "C" 5 Amps @ 28 Volts max Auxiliary Relay: Form "C" 2 Amp @ 28 Volts max Type: Solid state outputs (Outputs #3 & #4) Short-to-common 100 mA @ 24 VDC maximum
<b>Operating Temperature</b>	-4°F to 140°F (-20°C to 60°C)
<b>Operating Humidity</b>	5% to 95% non-condensing
<b>Dimension</b>	4-3/4"W x 6-3/8"H x 4-1/2"D

926

Outdoor Keypad for surface wall or pedestal post mount

250.00

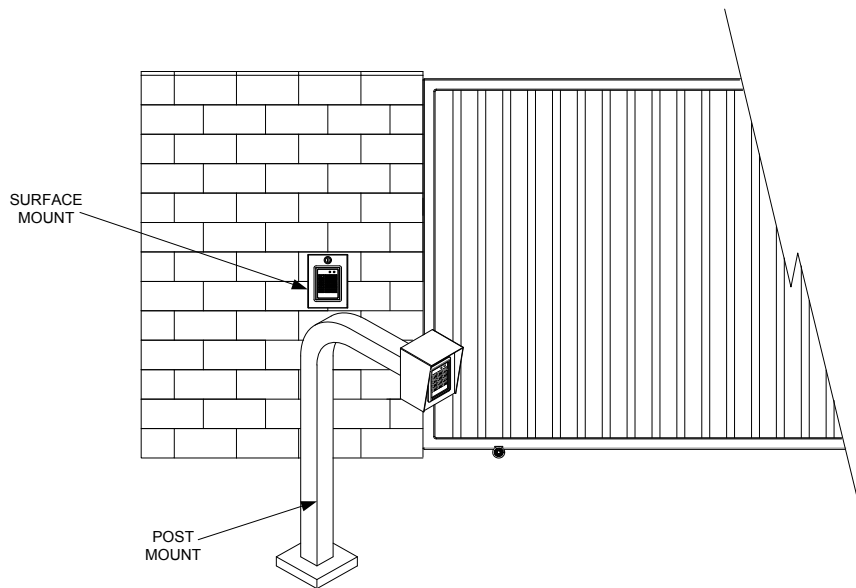

ACCESSORIES

LIST

The perfect companion for the 926 EntryCheck is SDC's **WRC Series 2-Channel wireless transmitter/receiver solution**. Specifically designed to be used as a remote release for single or dual door access control applications. Receiver has the capacity to learn up to 30 fixed transmitter codes using the onboard learning button and status LED. The WRC-R2 Receiver fits perfectly inside the 926 housing.



926 with WRC Wireless Receiver and Pendant Transmitter

<b>WRC-2B</b>	433MHz 2-Button Pendant Wireless Transmitter	<b>50.00</b>
<b>WRC-R2</b>	433MHz 2-Channel Wireless Receiver	<b>81.00</b>



**SECURITY DOOR CONTROLS**  
801 Avenida Acaso • Camarillo, CA 93012  
Email: Service@sdccsecurity.com • www.sdccsecurity.com

Price List Effective February 1, 2017