



926

The **926 Series EntryCheck™** elevates the robustness of the indoor/outdoor 920 keypad with a heavy metal privacy and rain shroud. Perfect for post mount applications.


ELECTRICAL SPECIFICATIONS (KEYPAD)

Voltage	12/24 VAC/DC
Current	30mA typical, 150mA maximum
Outputs	Main Relay: Form "C" 5 Amps @ 28 Volts max Auxiliary Relay: Form "C" 2 Amp @ 28 Volts max Type: Solid state outputs (Outputs #3 & #4) Short-to-common 100 mA @ 24 VDC maximum
Operating Temperature	-4°F to 140°F (-20°C to 60°C)
Operating Humidity	5% to 95% non-condensing
Dimension	4-3/4"W x 6-3/8"H x 4-1/2"D

926

Outdoor Keypad for surface wall or pedestal post mount

258.00

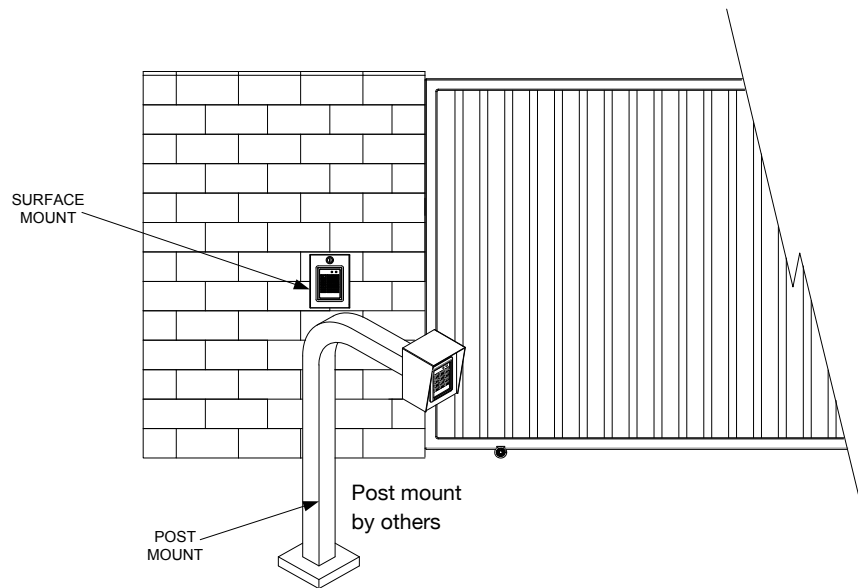

ACCESSORIES

LIST

The perfect companion for the 926 EntryCheck is SDC's **WRC Series 2-Channel wireless transmitter/receiver solution**. Specifically designed to be used as a remote release for single or dual door access control applications. Receiver has the capacity to learn up to 30 fixed transmitter codes using the onboard learning button and status LED. The WRC-R2 Receiver fits perfectly inside the 926 housing.



926 with WRC Wireless Receiver and Pendant Transmitter

WRC-2B	433MHz 2-Button Pendant Wireless Transmitter	52.00
WRC-R2	433MHz 2-Channel Wireless Receiver	84.00



SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdcsecurity.com • www.sdcsecurity.com