



918



500 user codes, 1 to 6 digits in length, 4 outputs, 2 relay and 2 solid state outputs timed or latching (on/off). Assign entry PIN's to relays 1 and/or 2. Tactile keys with selectable audible volume for key depression or output activation. LED Status: Access, lockout. Timed anti-passback. Keypad tamper lockout. Request-to-Exit/Enter input. Indoor blue backlit, moisture resistant keypad. Thick S.S. faceplate 3/32" (2mm).

ELECTRICAL SPECIFICATIONS

Voltage: 12/24 VAC/DC — 5-16 VDC for wiegand

Current: 30mA typical, 150mA maximum - 60mA max for wiegand

Outputs (918): Relay 1 - SPDT 5 Amps @ 30VDC, Relay 2 - SPDT 2 Amps @ 30VDC, Switch to Common Outputs 3 & 4 - 100mA @ 30VDC

Dimensions: 3"W x 4-3/4"H x 1-1/2"D (1/4" wall projection)

918 Stand alone digital indoor keypad 160.00

918W Indoor digital keypad, Wiegand output 160.00



918W



SPECIFY FINISH Add to List

U	630 Brushed Stainless Steel (standard)	N/C	H	613 Oil Rubbed Bronze	60.00
C	605 Bright Brass	60.00	P	625 Bright Chrome	60.00
D	606 Dull Brass	60.00			

OPTIONS Add to List

TR12 Plug in power supply (optional) 72.00
120 VAC primary, Output: 12VDC @ 1Amp, Secondary screw terminals with ground terminal



900-PS with 918 Keypad

ACCESSORIES ADD to List

900-PS Privacy & Rain Shroud for stand alone digital keypads 918. 96.00
Ensure protection from rain and security from spying eyes.



SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective October 1, 2012



920/920P/920PW INDOOR/OUTDOOR EntryCheck™

Distributor Discount Code JK LIST



920



920P



920PW



The 920 Series EntryCheck™ stand-alone digital keypad is designed to control access of a single entry point with up to 500 users. Each user is assigned a personal identification number (PIN). Keypad entry of a valid one to six digit code activates one or both of the output relays which releases an electric door lock. Heavy Cast Vandal Resistant Housing. Heavy Cast Metal Blue Backlit Keys.


ELECTRICAL SPECIFICATIONS

Voltage: 12/24 VAC/DC — 5-16 VDC for wiegand (920PW)
Current: 30mA typical, 150mA maximum - 60mA max for wiegand
Outputs (920/920P): Relay 1 - SPDT 5 Amps @ 30VDC
Relay 2 - SPDT 2 Amps @ 30VDC
Switch to Common Outputs 3 & 4 - 100mA @ 30VDC
Operating Temperature: -20°F to + 130°F (-30°C to + 54°C)
Operating Humidity: 5% to 95% non-condensing
Housing: 3"W x 5-3/4"H x 1-7/16"D

920	Stand alone digital keypad	175.00
920P	Stand alone digital keypad with Prox Reader	390.00
920PW	Digital keypad with Prox Reader, Wiegand output	390.00



CARDS AND KEY FOBS see page 11



925/925P/925PW INDOOR/OUTDOOR Shroud EntryCheck™

Distributor Discount Code JK LIST



925



925P




925PW



The 925 Series EntryCheck™ elevates the robustness of the indoor/outdoor 920 keypad with a heavy metal privacy and rain shroud. Perfect for post mount applications.

ELECTRICAL SPECIFICATIONS (Keypad)

Voltage: 12/24 VAC/DC — 5-16 VDC for wiegand (925PW)
Current: 30mA typical, 150mA maximum - 60mA max for wiegand
Outputs (925/925P): Relay 1 - SPDT 5 Amps @ 30VDC
Relay 2 - SPDT 2 Amps @ 30VDC
Switch to Common Outputs 3 & 4 - 100mA @ 30VDC
Operating Temperature: -20°F to + 130°F (-30°C to + 54°C)
Operating Humidity: 5% to 95% non-condensing
Shroud Dimension: 4-1/16"W x 6-1/8"H x 2-5/8"D



925	Stand alone digital keypad with privacy shroud	271.00
925P	Stand alone digital keypad with Prox Reader and privacy shroud	486.00
925PW	Digital keypad with Prox Reader, Wiegand output, and privacy shroud	486.00



CARDS AND KEY FOBS see page 11

Price List Effective October 1, 2012

SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com




Access Control



923/923P/923PW NARROW INDOOR/OUTDOOR EntryCheck™

Distributor Discount Code JK LIST

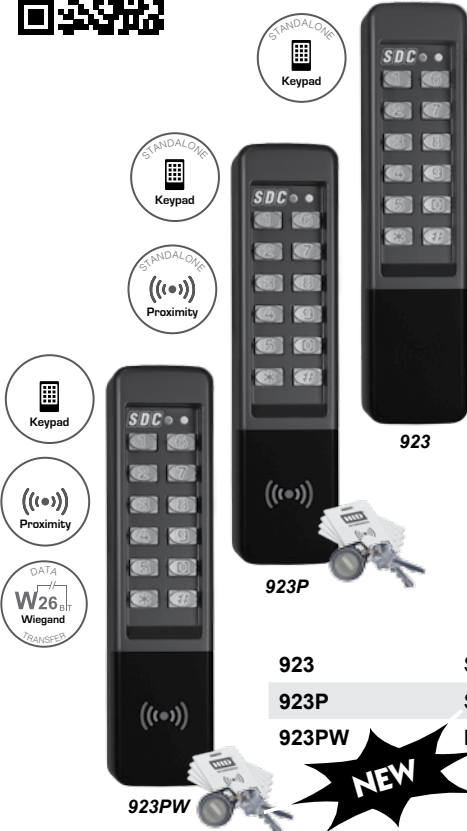

The 923 Series EntryCheck™ narrow stand-alone digital keypad is designed to control access of a single entry point with up to 500 users. Each user is assigned a personal identification number (PIN). Keypad entry of a valid one to six digit code activates one or both of the output relays which releases an electric door lock. Heavy Cast Vandal Resistant Housing. Heavy Cast Metal Blue Backlit Keys.

ELECTRICAL SPECIFICATIONS

- Voltage:** 12/24 VAC/DC — 5-16 VDC for wiegand
- Current:** 30mA typical, 150mA maximum - 60mA max for wiegand
- Outputs (923/923P):** Relay 1 - SPDT 5 Amps @ 30VDC
Relay 2 - SPDT 2 Amps @ 30VDC
Switch to Common Outputs 3 & 4 - 100mA @ 30VDC
- Operating Temperature:** -20°F to + 130°F (-30°C to + 54°C)
- Operating Humidity:** 5% to 95% non-condensing
- Housing:** 1-3/4"W x 7-5/16"H x 1-3/8"D

923	Stand alone digital keypad, narrow	200.00
923P	Stand alone digital keypad, narrow, with Prox Reader	475.00
923PW	Digital keypad, narrow, with Prox Reader, Wiegand output	475.00



CARDS AND KEY FOBS

see page 11



921P/924P INDOOR/OUTDOOR 2-PIECE EntryCheck™

Distributor Discount Code JK LIST



The 921P and the 924P EntryCheck™ stand-alone digital keypad with Prox Reader and Controller (2-piece configuration) are designed to control access of a single entry point with up to 500 users. Each user is assigned a personal identification number (PIN). Keypad entry of a valid one to six digit code activates one or both of the output relays which releases an electric door lock. Heavy Cast Vandal Resistant Housing. Heavy Cast Metal Blue Backlit Keys.

ELECTRICAL SPECIFICATIONS

- Voltage:** 12/24 VAC/DC
- Current:** 60mA typical, 150mA maximum
- Outputs:** Relay 1 - SPDT 5 Amps @ 30VDC
Relay 2 - SPDT 2 Amps @ 30VDC
Switch to Common Outputs 3 & 4 - 100mA @ 30VDC
- Operating Temperature:** -20°F to + 130°F (-30°C to + 54°C)
- Operating Humidity:** 5% to 95% non-condensing
- Housing:** 921P: 3"W x 5-3/4"H x 1-7/16"D 924P: 1-3/4"W x 7-5/16"H x 1-3/8"D

921P	Stand alone, surface mount digital keypad, with Prox Reader and Controller	575.00
924P	Stand alone, surface mount digital keypad, narrow, with Prox Reader and Controller	600.00

CARDS AND KEY FOBS

see page 11



SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdgsecurity.com • www.sdgsecurity.com

Price List Effective October 1, 2012