


# SDC Security Door Controls


801 Avenida Acaso, Camarillo, Ca. 93012 • (805) 494-0622 •  
 www.sdcsecurity.com • E-mail: service@sdsecurity.com

## LRIDC1L / LRIDC1R INSTALLATION INSTRUCTIONS FIELD RETROFIT LATCH STATUS/REX SWITCH KIT


Remove Head Cover and Head. Replace existing rod with SDC P/N 5783. Tap existing hole for 1/4-20 threads. Attach switch assembly to the tapped hole with the 1/4-20 screw supplied. Route wires thru extrusion as shown and use 5786 retaining clip to safely lock wires in place. Replace Head and Head Cover

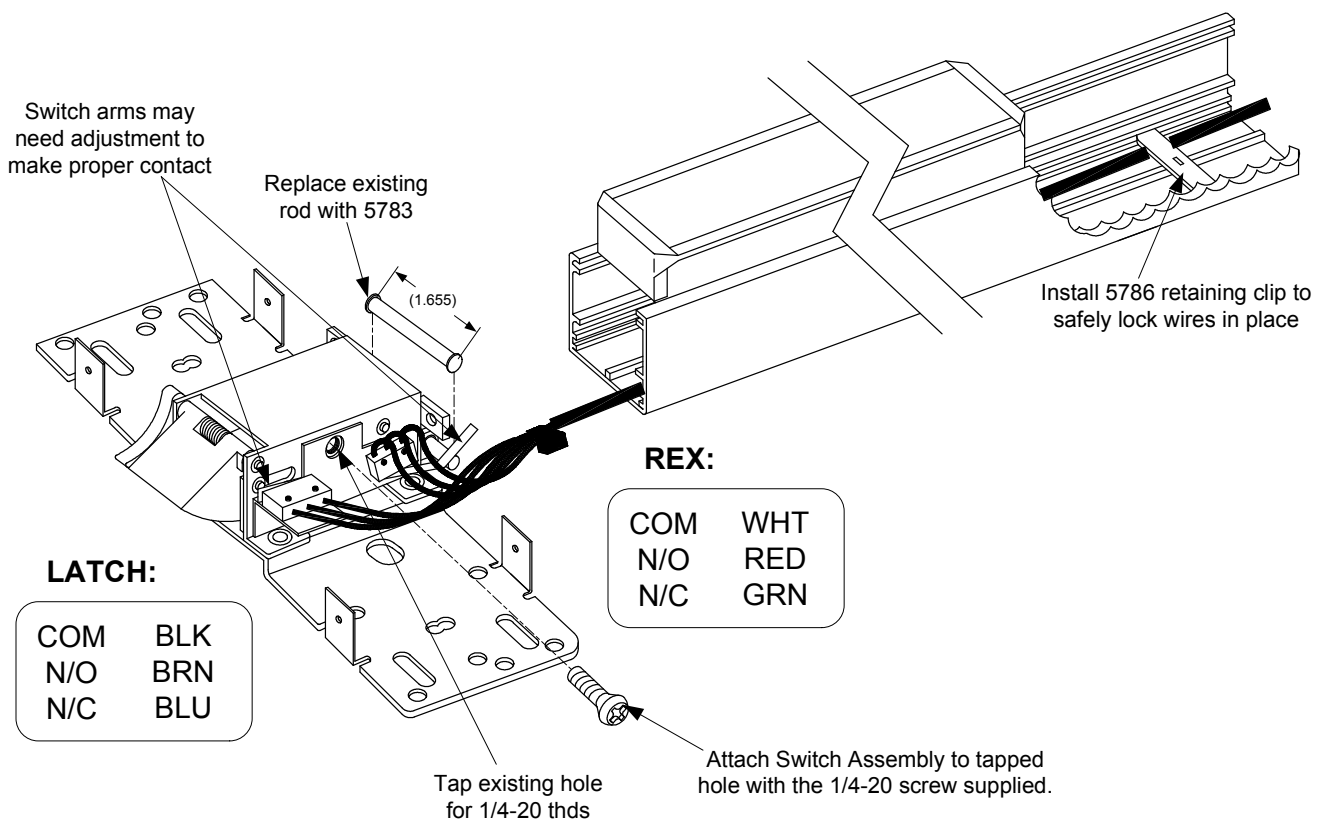


**LRIDC1R**



**LRIDC1L**



**LRIDC1RL**



Any suggestions or comments to this instruction or product are welcome. Please contact us through our website or email [engineer@sdsecurity.com](mailto:engineer@sdsecurity.com)