

IP Pro Controller board

FEATURES

- Controls one door directly, with multi-door expansion capabilities
- Password protected built-in web server or FREE downloadable 'Grid' software
- Two Ethernet Ports allow for interfacing with additional IP devices like cameras additional door controllers, etc.
- Entry & exit reader capability
- Supports industry standard proximity, smart card, and multi-technology readers (Wiegand output)
- Compliant with PoE+ standard
- Internet Explorer, Firefox and Google Chrome browser support
- 15,000 users (up to 2 credentials per user)
- Batch card enrollment
- 250 User groups/Time Zones/Door Groups
- Audit Trail – Up to 5,000 events may be exported as a .csv file from web server, unlimited events from PC software interface
- Anti-tailgating
- Door Status Monitoring Input
- Request-to-Exit (REX) Input
- Lock Relay Output

SPECIFICATIONS

IP Pro Controller/Door Station

Voltage	12 VDC Input
Current Consumption	250mA (max)
Operating Temperature	14°F – 122°F (Indoor use only)
Dimensions	5.375" x 3.5" x 0.875" board only 9.25" x 6.5" x 2.1875" w/ ABS plastic enclosure
Weight	1lb
Relay Output Type	Form C (SPDT) x 2

Relay Contact Rating	Main (Lock) – 5A @ 30VDC Auxiliary – 1A @ 30VDC
Connections	Digital Inputs: 4 dry contact inputs Ethernet: RJ45 RS-485 Terminal Bus Reader Power – 12VDC Reader Data – Wiegand (26bit to 37bit) Reader LED Control – Red & Green Two Solid State outputs (100mA max)


IP Pro Splitter

Input Voltage	44 - 57 VDC
Input Power	30W max
Output Power	24W max
Output Current	2A @ 12V
Relay Output Type	Form C (SPDT) x 2


IP Pro Injector

PoE+ Output Pin Assignment and Polarity	4/5 (+), 7/8 (-)
Output Power Voltage	55VDC
User Port Power	30Watts (Guaranteed)
Input Power	0.8A @ 100-240VAC

The IP Pro Line of IP-based Access Controllers allows expansion from one Standalone door up to a 100-door "Grid." The Choice is yours! **It's like having a local area network for your doors without all the headaches of an enterprise system.**



IP Pro Controller board



IP Pro Door Station Expansion board



IP Pro Controller enclosure



IP Pro Injector IP Pro Splitter



602RFx12VRxIPDC shown with optional batteries See batteries on page 95

IP Pro™ Components LIST

IPDCE	IP Pro Controller , board plus enclosure	696.00
IPI-30	IP Pro Injector , 30W PoE+	198.00
IPS-12	IP Pro Splitter , 12VDC PoE+	233.00



IP Pro™ Door Station LIST

IPDSE	IP Pro Door Station Expansion , board plus enclosure	593.00
--------------	---	---------------

IP Pro™ Kit LIST

IPPRO-SKE	IP Pro Starter Kit , including Controller board, Splitter, Injector plus Controller enclosure	1,150.00
IPPRO-SK	IP Pro Starter Kit , including Controller board, Splitter, Injector	1,123.00
602RFx12VRxIPDC	1 Amp , class 2 output power, 12/24 VDC dual output, IPDC Controller board, 12" W x 12" H x 3.75" D box	1,027.00
602RFx12VRxIPDS	1 Amp , class 2 output power, 12/24 VDC dual output, IPDS Door Station board, 12" W x 12" H x 3.75" D box	921.00

Install - Expand - Control






- Embedded software
- Browser Accessible
- 1 to 32 doors

- FREE Access Control Software
- Single PC Accessible
- 1 to 100 doors

EMBEDDED
software managed
via web browser




or Download **FREE**
SOFTWARE
for full Grid Access

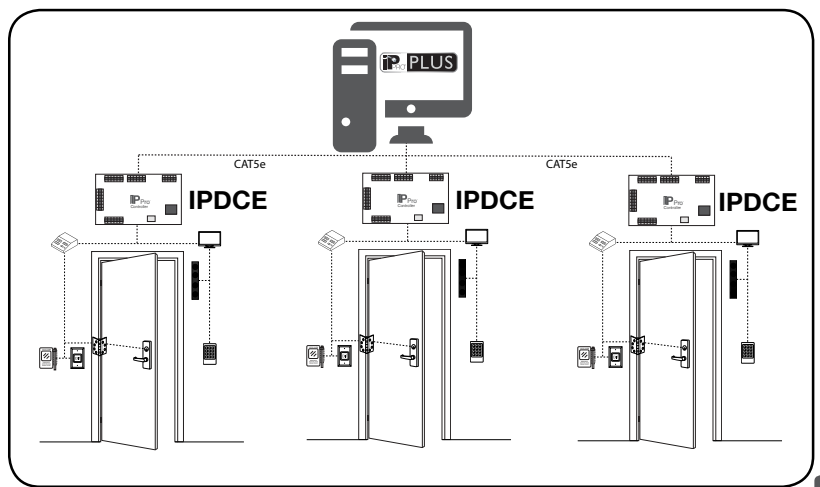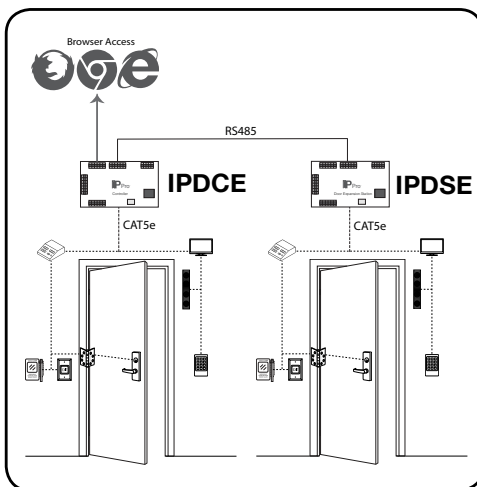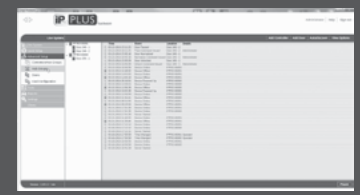



PLUS features include:

- Intuitive & easy to use software; similar look & feel to the IP Pro™ web browser interface
- Free, single PC software for up to 100 doors
- Configure & manage all your IP Pro™ controllers from a single interface – No enterprise headaches
- Wizard & quick start buttons for common tasks
- Automated management reporting
- E-mail alert notifications
- Utilizes the scalability of Microsoft SQL server
- Save more energy the more doors you add


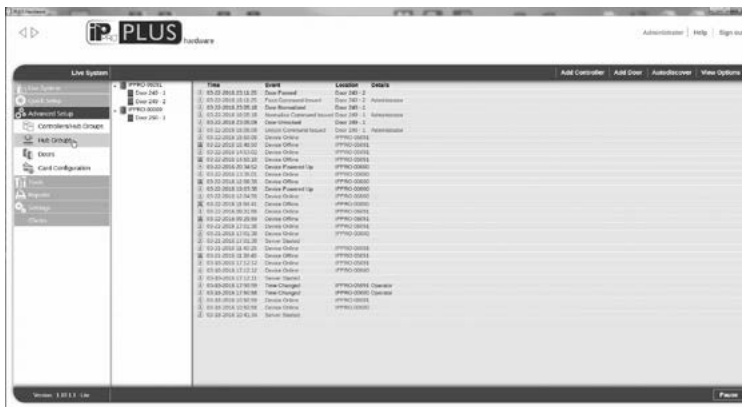


PLUS Hardware is used by the installer to set up controllers, doors and user profiles

- Enable & edit IPPro controllers
- Enable & edit door settings
- Create event filters
- Enable e-mail notifications

PLUS Manage is used by system administrators to facilitate database changes required on a day-to-day basis, and offers various reporting tools

- Create, view, & edit users
- Add access & holiday schedules
- Generate user & event reports

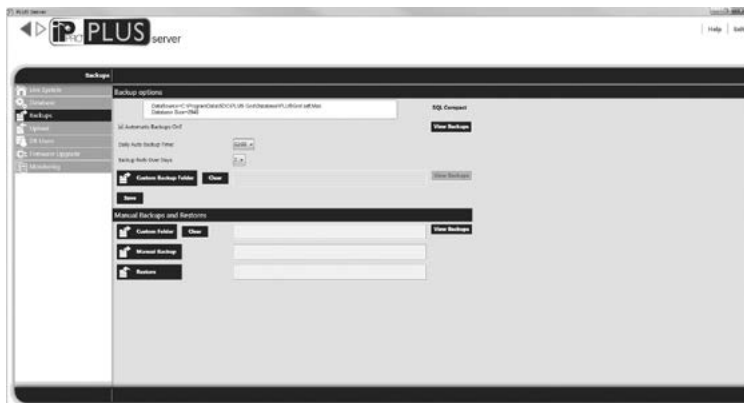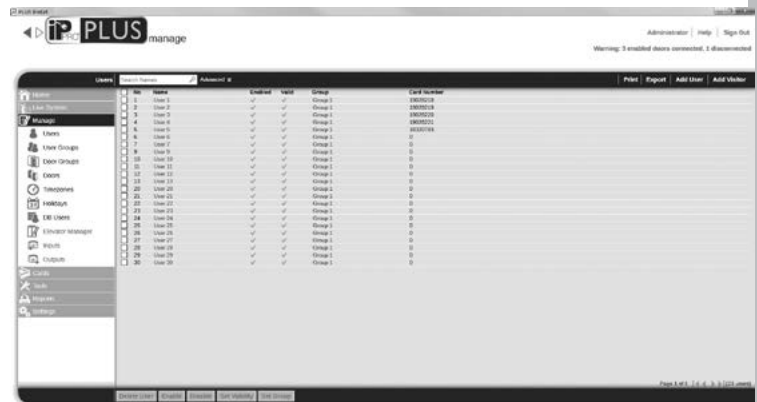

PLUS Server is used by system administrators to perform specialized tasks, such as database backups, firmware updates, importing/exporting users


- Perform manual or schedule automatic backups
- Import/Export Users
- Perform IPPro firmware updates

Live System events can be monitored from either module!

Prox Reader		LIST
IPRW	Wiegand Reader - PROX, Surface Mount, HID compatible (125 kHz)	202.00
IPRW300	Wiegand Reader - PROX, Mullion Mount, HID compatible (125 kHz) includes Black and White Cover	202.00
IPRW500	Wiegand Reader - PROX, Single Gang Box or Surface Mount, HID compatible (125 kHz) includes Black and White Cover	232.00



Wiegand Reader		LIST
918W	Indoor digital keypad, Wiegand output	171.00
920PW	Digital keypad with Prox Reader, Wiegand output	417.00
923PW	Digital keypad, narrow, with Prox Reader, Wiegand output	507.00
925PW	Digital keypad with Prox Reader, Wiegand output, and privacy shroud	520.00

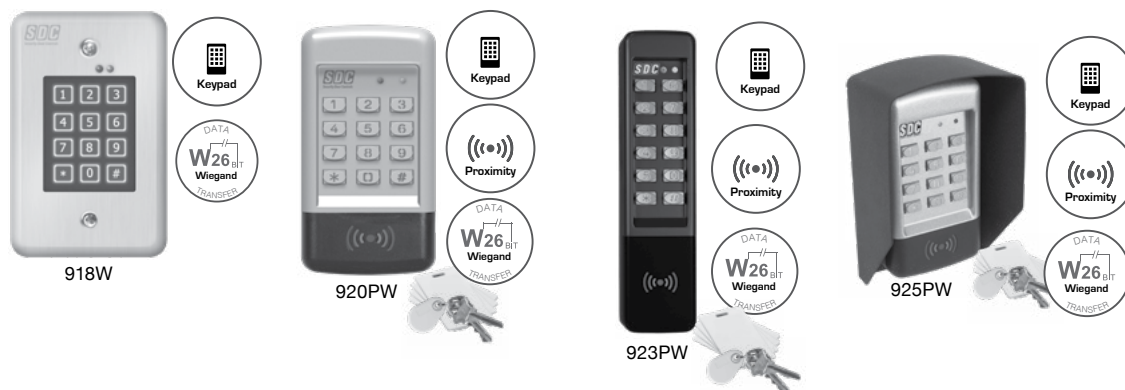

Cards, Key FOBS and Tags Distributor Discount Code **MV List**

HID1326-25	Proximity Card, HID compatible, 25 cards	171.00
HID1326-100	Proximity Card, HID compatible, 100 cards	683.00
HID1346-10	Proximity Key Fob, HID compatible, 10 key fobs	140.00
HID1346-100	Proximity Key Fob, HID compatible, 100 key fobs	1,365.00
PTAG-10	Proximity Disc Tag, HID compadible, 10 tags	78.00
PTAG-25	Proximity Disc Tag, HID compadible, 25 tags	186.00

