


PUSH TO EXIT

Field Applied Sign with green letters



Access Control System Units
Burglary Resistant Electronic Locking Mechanism

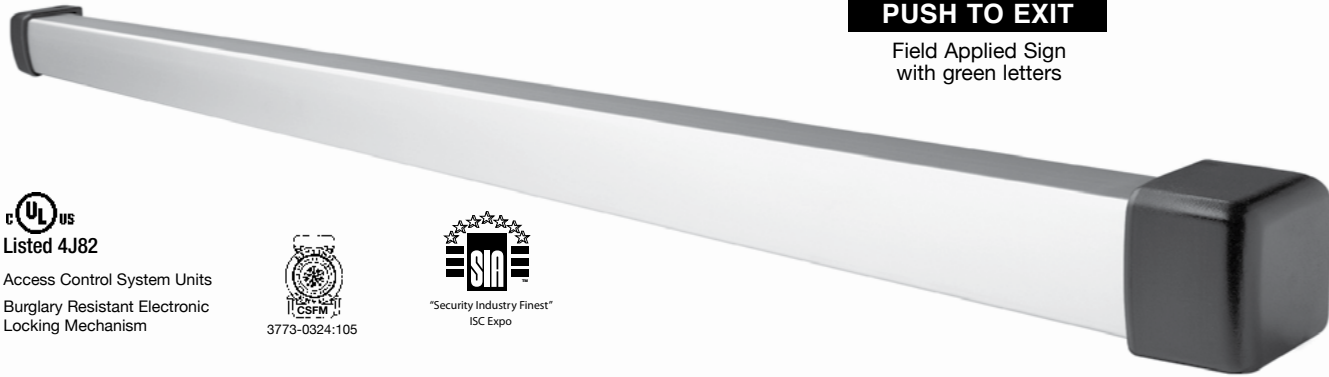

STANDARD FEATURES


- Actuation:** Pressure Sense Technology; Tri-Failsafe
- Voltage:** 12/24VDC Voltage Sense Input
- Current:** 20 mA at Rest, 115 mA Active
- Lock Output:** SPDT, 3 Amp @ 30VDC
- Alarm Shunt/Status Output:** SPDT, 3 Amp @ 30VDC
- Accessories Include:**
10 ft. cable and connector; PT-2U Armored Power Transfer Loop

Standard length, 36"

MODEL	FINISH	LIST PRICE
PSB560V	628 Aluminum Anodized	363.00
PSB560Y	Black Anodized	363.00
PSB560S	629 Bright Stainless Steel	492.00
PSB560U	630 Brushed Stainless Steel	492.00

Bars for wide doors

42	Bar for 42" Door. May be field cut.	N/C
48	Bar for 48" Door. May be field cut <i>Ex: PSB560V-42</i>	N/C



PT-2U
(Included with bar)



PT3


ACCESSORIES

	LIST
500GL-KIT One glass door mounting kit with adhesive for eight to ten bars	244.00
500GL-MB One glass door mounting kit without adhesive	135.00
500-SK Shim kit used to raise bar from door. Recommended for wood or hollow metal doors with uneven mounting surface.	25.00


Power Transfer:

PT-3V Stainless steel armored loop with aluminum surface wire junction box	47.00
---	--------------


Standard Installation with standard mounting hardware




500GL Kit Glass Mount Installation



1. Assemble kit



2. Apply Adhesive



3. Mount



SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective February 1, 2017

EXIT MECHANICAL SWITCH

Distributor Discount Code **DK**

PUSH TO EXIT

Field Applied Sign with green letters



Listed 4J82

Access Control System Units
Burglary Resistant Electronic
Locking Mechanism



3773-0324-106

STANDARD FEATURES

Actuation: 1/8" total bar movement for mechanical switch actuation

Contact: SPDT, 5 Amp @ 30VDC (2nd switch optional)

Accessories include: PT-2U Power Transfer Loop

Standard length, 36"

MODEL	FINISH	LIST PRICE
MSB550V	628 Aluminum Anodized	225.00
MSB550Y	335 Black Anodized	333.00
MSB550S	629 Bright Stainless Steel	373.00
MSB550U	630 Brushed Stainless Steel	373.00

2 SPDT Contacts **ADD 30.00**

Add "2" for 2nd mechanical switch for dual-failsafe redundant operation; alarm shunt; or monitoring output. *Ex: MSB550-2V*

Bars for wide doors

42 Bar for 42" Door. May be field cut. **N/C**

48 Bar for 48" Door. May be field cut. **N/C**

Ex: MSB550V-42

EXIT MECHANICAL SWITCH - OUTDOOR WEATHER RESISTANCE

Distributor Discount Code **DK**

PUSH TO EXIT

Field Applied Sign with green letters

STANDARD FEATURES

OUTDOOR, WEATHER RESISTANCE

Water Sealed Switches

Actuation: 1/8" total bar movement for mechanical switch actuation

Contact: SPDT, 5 Amp @ 30VDC (2nd switch optional)

Accessories include: PT-3V Power Transfer Loop, 2 SPDT Contacts included

Standard length, 36"

MODEL	FINISH	LIST PRICE
MSB550VW	628 Aluminum Anodized	363.00
MSB550YW	335 Black Anodized	363.00

Bars for wide doors

42 Bar for 42" Door. May be field cut. **N/C**

48 Bar for 48" Door. May be field cut. **N/C**

Ex: MSB550VW-42

Price List Effective February 1, 2017

SECURITY DOOR CONTROLS

801 Avenida Acaso • Camarillo, CA 93012

Email: Service@sdsecurity.com • www.sdsecurity.com



Egress Controls