

The **Exit Check® All-In-One Device** integrates our premium Spectra™ bar with SDCs innovative delayed egress electronics. When unauthorized egress is initiated by depressing the push pad of the S6000-101, an audible alarm will sound and an irreversible delay period of 15 seconds will begin. After the delay period has expired, the device unlocks, permitting egress until the device is reset. In a life safety emergency, the device will immediately unlock upon loss of power or when powered by a fire control supervised power supply. **Door contact included for anti tailgate and door prop.**

APPLICATION INCLUDE:


- Restricting the egress of wandering patients for their own safety
- Restricting the egress of commercial center patrons for security application needs
- Controlling pedestrian traffic in transportation facilities, including airport jetways and tarmacs
- Reducing shoplifting and employee theft




Single: 24VDC @ 540 mA

Pair: 24VDC @ 790 mA

SDC PUSH UNTIL ALARM SOUNDS. DOOR CAN BE OPENED IN 15 SECONDS.

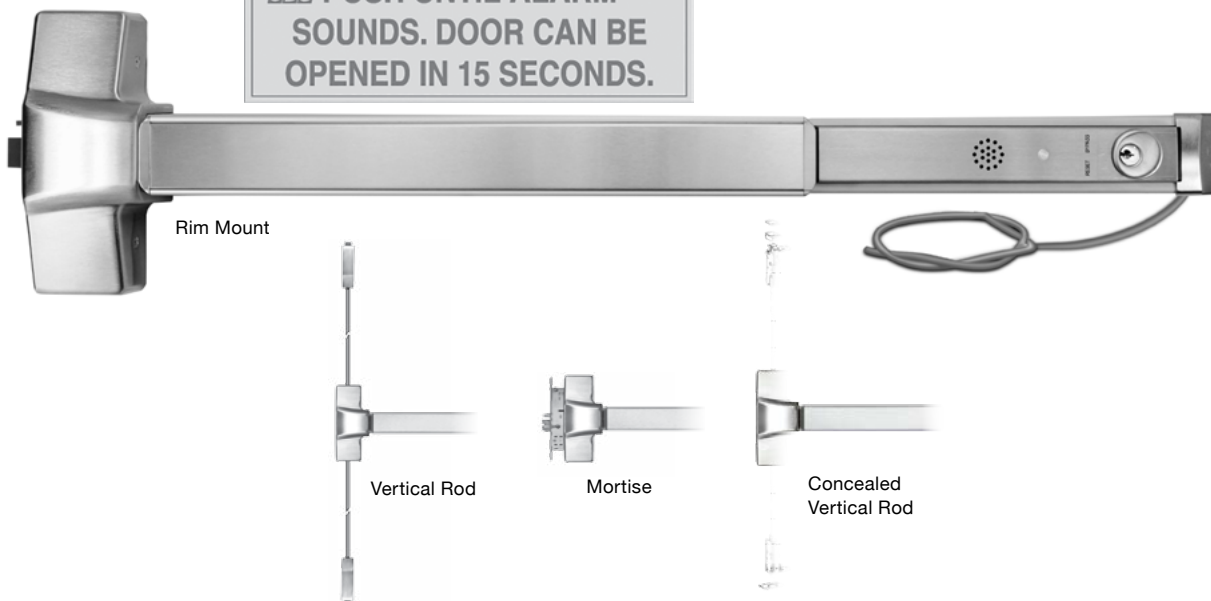

SPECIFY DEVICE		<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	LIST
S61	Rim mount exit device		621.00
S62	Surface Vertical - ROD GUARDS SUGGESTED		932.00
S63	Mortise [03 Lever Trim included] - specify: EE/GE Eclipse Escutcheon/Galaxy Escutcheon		1139.00
S68	Concealed Vertical		1035.00
SPECIFY FUNCTION		<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	
01	Exit Only	02 Dummy	03 Nightlatch N/C
SPECIFY PANIC OR FIRE RATED		<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	Add to List
P	Panic	N/C	F Fire 114.00
SPECIFY HAND (Mortise Only)		<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	
RR	Right hand reverse bevel, RHRB	LR	Left hand reverse bevel, LHRB N/C
SPECIFY FINISH		<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	
U	630 Dull Stainless Steel		N/C
SPECIFY LENGTH		<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	Add to List
36	For 36" Door (standard) N/C	42	For 42" Door 21.00 48 For 48" Door 42.00

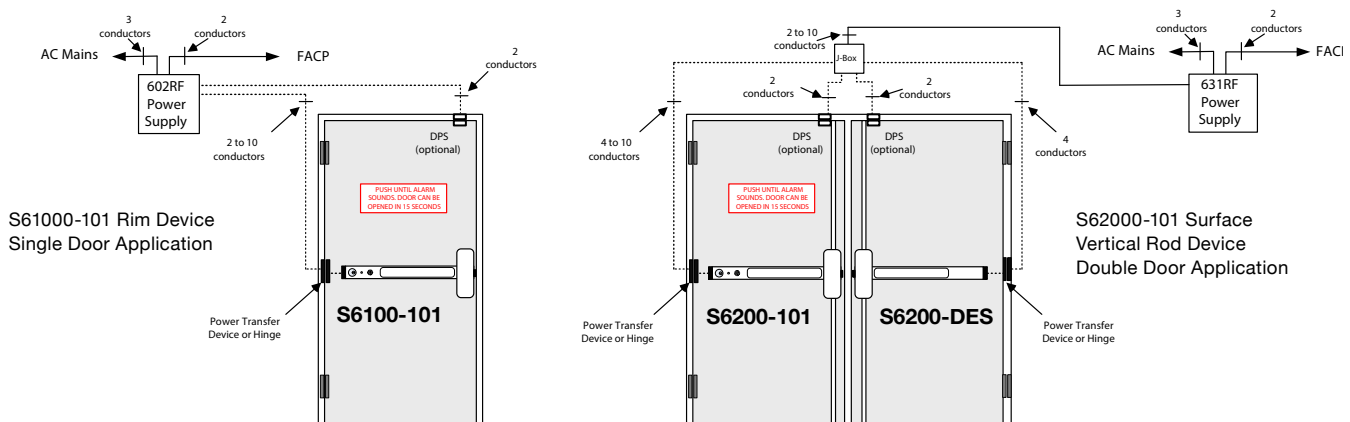

S61000-101 Rim Device Single Door Application

S62000-101 Surface Vertical Rod Device Double Door Application

SPECIFY DELAYED EGRESS **Add to List**

101	Electrification of master exit device and integrated controller with key switch control and reset, less cylinder	1398.00
DES	For pair of doors, additional exit device equipped with delayed egress mechanism, less integrated controller. Must be ordered together with 101 device.	518.00

SPECIFY OPERATION

If no Code is specified - ND is the SDC STANDARD OPERATIONS MODE for this product

NC	IBC, IFC, NFPA 101, NFPA 1-UFC, UBC,SBC Compliant	N/C
Fixed 15 exit delay, 1 or 2 second nuisance delay Calif. Building Code OSHPD/Manual Power Up		
ND	IBC, IFC, NFPA 101, NFPA 1-UFC, UBC,SBC Compliant	N/C
Fixed 15 exit delay, 1 or 2 second nuisance delay		
BC	BOCA National Building Code and Chicago Building Compliant	N/C
15 second fixed exit delay, 0 second nuisance delay, auto reset 30 seconds after door closure		
BD	BOCA National Building Code	N/C
15 second fixed exit delay, 1 or 2 second nuisance delay, auto reset 30 seconds after door closure		

SPECIFY TRIM (optional) **Add to List**

Mechanical Trim (less cylinder)

EK03U	Eclipse Escutcheon	GK03U	Galaxy Escutcheon	233.00
Electric Trim				
<ul style="list-style-type: none"> Failsecure, field reversible to failsafe • 600/300 mA @ 12/24VDC 4 ft cable and connectors 				
EKE03U	Eclipse style electric trim less mortise cylinder, Stainless Steel Finish			699.00
GKE03U	Galaxy style electric trim less mortise cylinder, Stainless Steel Finish			699.00

SPECIFY POWER TRANSFER (For the entire line of Power Transfer, see pages XX and XX) **LIST**

PTM-10AL	(10) Cond., 5 Amp @ 12/24V AC/ DV, Alum US28	371.00	PTH-10Q	(10) Cond., 1 Amp @ 12/24V per pair, 4.5" x 4.5"	202.00
PT-5	UL Listed Concealed Power Transfer Device, less wires	63.00	PT-3V	Armored flex conduit, less wires, with wire junction box	47.00



SPECIFY POWER SUPPLY (For the entire line of Power Supplies, see page XX) **LIST**

602RF	1 Amp, class 2 output, 12" W x 12" H x 3.75" D box	270.00
631RF	1.5 Amp, class 2 output, 12" W x 12" H x 3.75" D box	363.00

Note: 600 series Power Supply required with S6000-101 for UL listing

Price List Effective February 1, 2017

SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsec.com • www.sdsec.com



Exit Devices