

S6000 Spectra™ Series - S6300

Electric Mortise Exit Device



ELECTRIC MORTISE EXIT DEVICE

The SDC Brand electrified mortise exit device incorporating a clutch for vandal resistance and failsafe-failsecure function.



FEATURES

- Field Reversible Failsecure/Failsafe.
- Remains Latched When Unlocked for Fire Door Integrity
- Failsafe (F) Fire Rated Device for Stairwell Doors
- Power Loss or Signal from Fire Command Center Releases Failsafe Device Immediately
- Complies with National Building and Fire Codes

MODELS

- MS** Failsecure Electric Mortise Exit Device
- MF** Failsafe Electric Mortise Exit Device

SPECIFICATIONS

Voltage 600/300 mA @ 12/24VDC



 **HOW TO ORDER:**

1| SPECIFY MODEL

S63 Mortise

2| SPECIFY FUNCTION

01 Exit Only

03 Nightlatch

3| SPECIFY PANIC OR FIRE RATED

P Panic Exit Device

F Fire Exit Device

4| SPECIFY HAND

RR Right Hand Reverse Bevel, RHRB

LR Left Hand Reverse Bevel, LHRB

5| SPECIFY FINISH

U 630 Dull Stainless Steel (Standard)

6| SPECIFY LENGTH

36 For 36" Door

42 For 42" Door

48 For 48" Door

7| SPECIFY TRIM

EE Eclipse Escutcheon

GE Galaxy Escutcheon

SPECIFY KEY CYLINDERS (OPTIONAL)

CYL-6KDQ

6 pin, 1.125" Mortise Cylinder, Keyed Different, Dull Chrome

CYL-6KAQ

6 pin, 1.125" Mortise Cylinder, Keyed Alike, Dull Chrome



8| SPECIFY FAILSAFE OR FAILSECURE

MF Failsafe Electric Mortise Exit Device

MS Failsecure Electric Mortise Exit Device

 **ACCESSORIES**

PTM-2AL Aluminum Powder Coat, US28 Equivalent

PTM-2BZ Dark Brown Powder Coat, US10B Equivalent

PTM-10AL Aluminum Powder Coat, US28 Equivalent

PTM-10BZ Dark Brown Powder Coat, US10B Equivalent




PT-5 Concealed Mortise Mount Power Transfer Loop



PTH-4 Four Conductor Hinge, 1 Amp @ 12/24V per pair, 4.5" x 4.5" Five Knuckle Standard Weight

PTH-10 Ten Conductor Hinge, 1 Amp @ 12/24V per pair, 4.5" x 4.5" Standard Weight

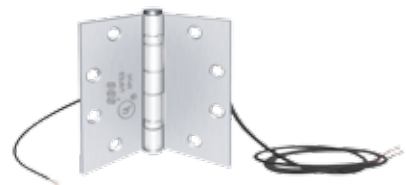

PT-2U With End Caps

PT-3V With Aluminum Wire Termination Box

