

S6000 Spectra™ Series - S6000-A/B

Alarmed Exit



ALARMED EXIT

Audible alarm and multi-colored LED provide alert to emergency egress. A field selectable alarm mode includes continuous alarm with manual key reset; or automatic rearm of alarm 2 min after door closes and may be retriggered. May be manually rearmed by key before automatically rearmed.



FEATURES

- 100 dB Alarm; Visual and Audible On/Off Status:
 - Armed - Green LED Blinks Every 4 Seconds
 - Alarm Mode - Red LED, Bypass - No LED
- Remote Status Output
- Remote Inhibit (requires B option)

MODELS

- A** Exit Alarm, 9V Battery Powered
- B** Exit Alarm, 12-24V AC/DC Input, 9V Battery Backup

SPECIFICATIONS

Arming Delay 15 or 60 Seconds

2 Modes:
Continuous Alarm: with Manual Key Reset
Automatic Re-Arm: 2 Minutes After Door Closes or Manual Key Reset Before 2 Minutes



 **HOW TO ORDER:**

1| SPECIFY MODEL

- S61** Rim Mount
- S62** SVR Surface Vertical Rod
- S63** Mortise (03 Lever trim included)
Specify: **EE/GE** Eclipse or Galaxy Escutcheon

2| SPECIFY FUNCTION

- 01** Exit Only
- 03** Nightlatch, Lever, Key Latch Retraction

3| SPECIFY PANIC OR FIRE RATED

- P** Panic Exit Device
- F** Fire Exit Device

4| SPECIFY HAND (FOR S63 ONLY)

- RR** Right Hand Reverse Bevel, RHRB
- LR** Left Hand Reverse Bevel, LHRB

5| SPECIFY FINISH

- U** 630 Dull Stainless Steel

6| SPECIFY LENGTH

- 36** For 36" Door
- 42** For 42" Door
- 48** For 48" Door

7| SPECIFY EXIT ALARM

- A** Exit Alarm, 9V Battery Powered
- B** Exit Alarm with 12/24V AC/DC Input
(9V Battery provides power backup)

Options:

- AR6** 6 or 10 Minute Alarm with Auto Rearm and Manual Key Reset
- AD1** 1 Second Arming Delay
- AR20** 20 Minute Alarm with Auto Rearm and Manual Key Reset

8| SPECIFY TRIM

FOR MORTISE S63 ONLY

- EE** Eclipse Escutcheon
- GE** Galaxy Escutcheon

**8| SPECIFY TRIM (OPTIONAL)
RIM, SURFACE ONLY**

Mechanical Trim (less cylinder)


- EK02U** Dummy Eclipse Escutcheon
- GK02U** Dummy Galaxy Escutcheon
- EK03U** Eclipse Escutcheon
- GK03U** Galaxy Escutcheon

Electric Trim

- Failsecure, field reversible to failsafe
- 4 ft cable
- 600/300 mA @12/24VDC

EKE03U Eclipse style electric trim less mortise cylinder, Stainless Steel Finish

GKE03U Galaxy style electric trim less mortise cylinder, Stainless Steel Finish

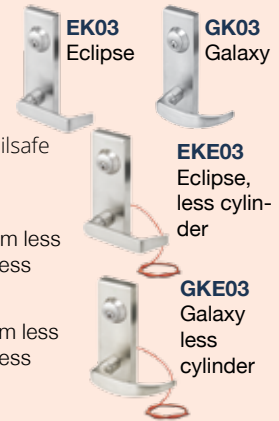

SPECIFY TRIM OPTIONS:

- Rim Cylinder Required for 03 function, Mortise Cylinder Required for S6300
- CYL-6KDQ** 6 pin, 1.125" Mortise Cylinder, Keyed Different, Dull Chrome
- CYL-6KAQ** 6 pin, 1.125" Mortise Cylinder, Keyed Alike, Dull Chrome
- RIM-CYL-KA** 6-pin Rim Cylinder, Keyed Alike, Specifically For EK03, GK03

 **ACCESSORIES**

- PTH-4Q** Four Wire, Dull Chrome
- PTH-10Q** Ten Wire, Dull Chrome

- PTM-2AL** Aluminum Powder Coat, US28 equivalent
- PTM-2BZ** Dark Brown Powder Coat, US10B equivalent

