- LED (field selectable Active or Off) Bypass - No LED
- Armed - Blinks every 4 seconds (Green when armed, Red when in alarm mode
- Low Battery Alert – Siren will beep every 45 seconds.
- 15 or 60 second arming delay
- Remote status output
- Field selectable alarm modes include:
  - › Continuous alarm with manual key reset
  - › Alarm automatically rearms 2 minutes after door closes and may be retriggered. May be manually rearmed by key before automatically rearmed.

Rim Mount

Mortise

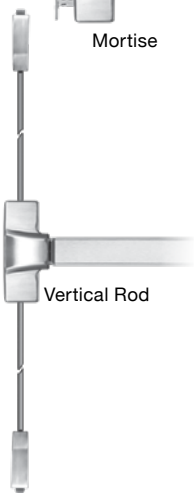

Vertical Rod

Specify Trim for S61 and S62 - See page 35

PTM Series

PTH x 5 Ft Cable

600 Series Power Supply
602RF (shown)

SPECIFY DEVICE — LIST

S61	Rim mount exit device	**621.00**
S62	Surface vertical	**932.00**
S63	Mortise *[03 Lever Trim included] - specify:* **EE/GE** *Eclipse Escutheon/Galaxy Escutheon*	**1139.00**

SPECIFY FUNCTION — Add to List

01	Exit Only	**03**	Nightlatch	**N/C**

SPECIFY PANIC OR FIRE RATED

P	Panic	**N/C**	**F** Fire	**114.00**

SPECIFY HAND (Mortise Only)

RR	Right hand reverse bevel, RHRB	**LR**	Left hand reverse bevel, LHRB	**N/C**

SPECIFY FINISH

U	630 Dull Stainless Steel	**N/C**

SPECIFY LENGTH

36	For 36" Door **N/C**	**42**	For 42" Door **21.00**	**48**	For 48" Door **42.00**

SPECIFY EXIT ALARM

A	Exit Alarm, 9V Battery Powered	**414.00**
B	Exit Alarm with 12/24V AC/DC input (9V battery provides power backup)	**456.00**

Options

AR6	6 or 10 minute alarm with auto rearm and manual key reset.	**AR20**	20 minute alarm with auto rearm and manual key reset
AD1	1 second arming delay		

SPECIFY TRIM (Mortise Only)

EE	Eclipse Escutheon	**GE**	Galaxy Escutheon	**N/C**

TRIM OPTIONS — Add to List

CYL-6KDQ	6 pin, 1.125" mortise cylinder, keyed different, dull chrome	**32.00**
CYL-6KAQ	6 pin, 1.125" mortise cylinder, keyed alike, dull chrome	**32.00**
RIM-CYL-KA	Rim Cylinder for 03 Function, keyed alike - see page 39 for more info	**34.00**

SPECIFY POWER TRANSFER (For the entire line of Power Transfer, see page 88 and page 89) — LIST

PTM-2AL	Two (2) Conductor Power Transfer Device: Two (2) 18 Ga. wires 5 Amp @ 12/24V AC/DV, Aluminum Powder Coat, US28 equivalent	**371.00**
PTH-4Q	Four (4) Conductor Power Transfer Hinge 1 Amp @ 12/24V per pair, 4.5" x 4.5" standard weight, 626 Dull Chrome	**156.00**

SPECIFY POWER SUPPLY (For the entire line of Power Suplies, see page 90) — LIST

602RF	1 Amp, class 2 output, 12" W x 12" H x 3.75" D box	**270.00**
631RF	1.5 Amp, class 2 output, 12" W x 12" H x 3.75" D box	**363.00**

SDC SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective February 1, 2017