


Electric Frame Actuator Controlled Exit Device

FEATURES

- Fire rated exit device
- Failsafe, unlocks by access control, power loss or signal from fire command center
- For use with fire rated exit and stairwell doors
- Door stays latched even when unlocked
- All wiring maintained in the strike jamb
- Complies with all national codes
- No power transfer hinge

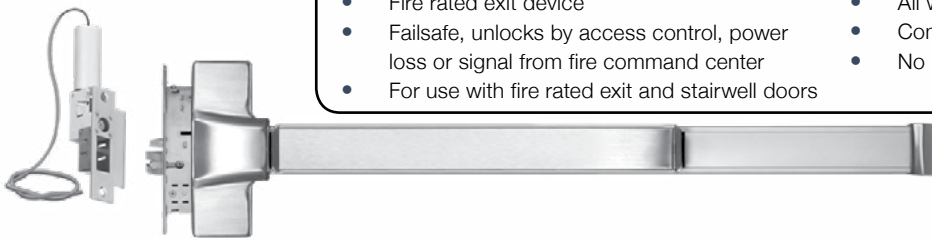

Exit Devices

See SDC power supplies with fire command interface for emergency release of exit device



NE03 Nova



EE03 Eclipse



GE03 Galaxy



G03 Galaxy



E03 Eclipse



N03 Nova

SPECTRA SERIES EXIT DEVICE

S6303FH	Fire rated mortise exit device with electric frame actuator, key retracts latch	1,978.00
----------------	---	-----------------

ACTUATOR VOLTAGE AND FRAME SIZE

Failsafe actuator for 1-3/4" to 2" face frames		Narrow failsafe actuator for 1-1/4" to 1-1/2" face frames	
A 115VAC 0.2 Amp	N/C	D 115VAC 0.2 Amp	129.00
B 24VAC 0.5 Amp	N/C	E 24VAC 0.5 Amp	129.00
C 24VDC 0.5 Amp	N/C	F 24VDC 0.5 Amp	129.00

SPECIFY HAND

RR Right hand reverse bevel, RHRB	LR Left hand reverse bevel, LHRB	N/C
--	---	------------

SPECIFY LENGTH

36 For 36" Door (std)	N/C	48 For 48" Door	42.00
42 For 42" Door	21.00		

SPECIFY FINISH

U 630 Dull Stainless Steel (std)	N/C
---	------------

OPTIONAL STATUS OUTPUTS

L Latch position status output, SPDT, 3 Amp	65.00
S Latch & deadlocked status output, SPDT, 3 Amp	108.00
SC10 Socket connectors with 10ft. cable, power wiring only	65.00
SC10-5 Socket connectors with 10ft. cable for power and options	83.00

SPECIFY TRIM

EE03 Eclipse x Escutcheon	GE03 Galaxy x Escutcheon	NE03 Nova x Escutcheon	N/C
E03 Eclipse	G03 Galaxy	N03 Nova	N/C

SPECIFY TRIM FINISH

U 630 Dull Stainless Steel (std)	N/C
---	------------

TRIM OPTIONS

CYL-6KDQ 6 pin, 1.125" mortise cylinder, keyed different, dull chrome	33.00
CYL-6KAQ 6 pin, 1.125" mortise cylinder, keyed alike, dull chrome	33.00



SDC SECURITY DOOR CONTROLS
 801 Avenida Acaso • Camarillo, CA 93012
 Email: Service@sdsecurity.com • www.sdsecurity.com