
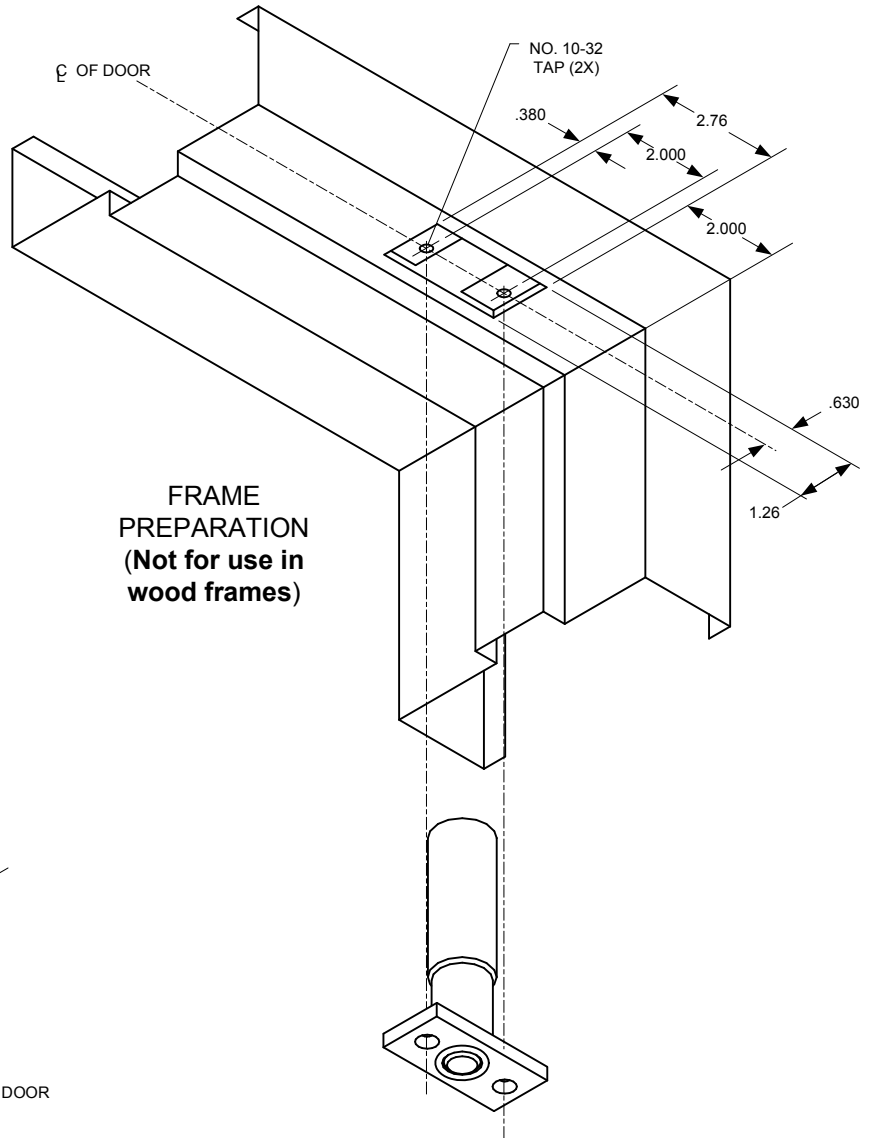
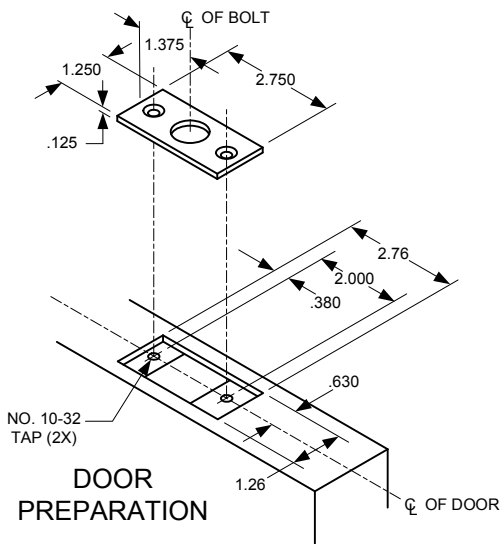


# SDC Security Door Controls


801 Avenida Acaso, Camarillo, Ca. 93012 • (805) 494-0622 •  
 www.sdcsecurity.com • E-mail: service@sdsecurity.com

## TEMPLATE 110/210

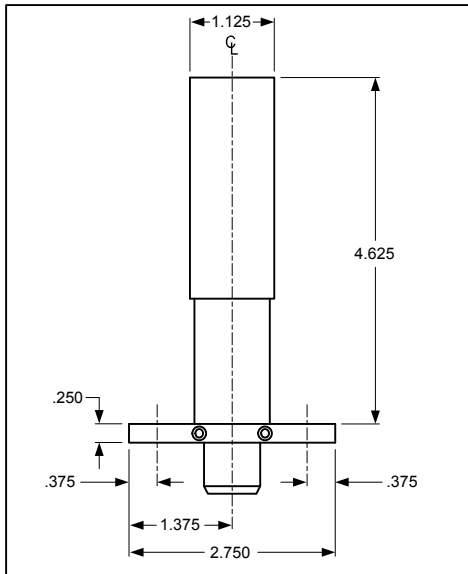

FRAME  
 PREPARATION  
 (Not for use in  
 wood frames)

### Bolt Adjustable for Wide Door Gap

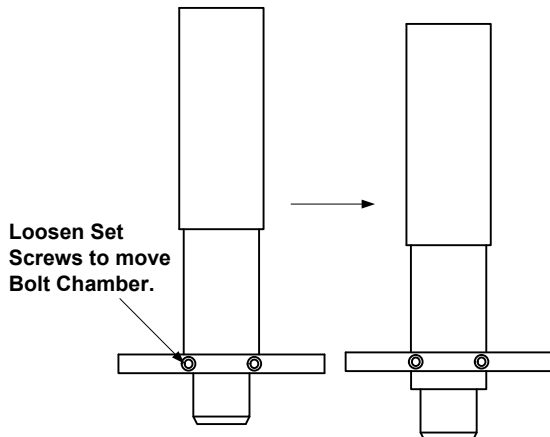

**NOTE: TEMPLATE DIMENSIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE**


### TECHNICAL DATA

- FACE PLATE:** 2-3/4" x 1-1/4" x 1/4" (69.85mm x 31.75mm x 6.35mm)
- STRIKE:** 2-3/4" x 1-1/4" x 1/8" (69.85mm x 31.75mm x 3.18mm)
- ID REQUIREMENTS:** 2-3/4" x 1/4" x 4-5/8" (69.85mm x 6.35mm x 117.48mm)
- BOLT:** 1/2" (12.70mm) DIA. STAINLESS STEEL
- BOLT THROW:** 1/2" (12.70mm) ROTATING, ADJUSTABLE FOR WIDE GAP
- 110: FAIL-SAFE – LOCKED WHEN ENERGIZED**
- 210: FAIL-SECURE – UNLOCKED WHEN ENERGIZED**
- SOLENOID:** CONTINUOUS DUTY


Any suggestions or comments to this instruction or product are welcome. Please contact us through our website or email engineer@sdsecurity.com

# LOCK WIRING

## 110 (Standard wiring):

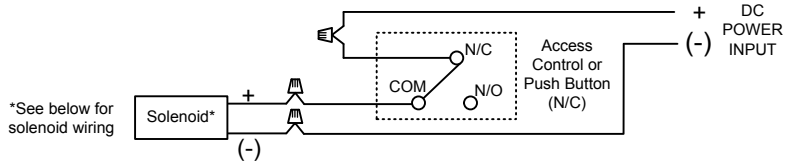


## 210 (Standard wiring):

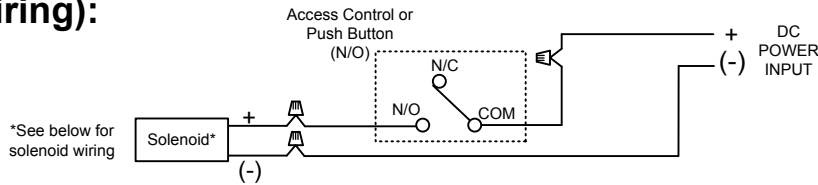


## Solenoid Voltage Configuration:

### 24VDC SOLENOID CONFIGURATION



### 12VDC SOLENOID CONFIGURATION



**ELECTRICAL DATA:**  
**Dual Voltage (110/210)**  
 12VDC @ .9 Amp (max.)  
 24VDC @ .45 Amp (max.)  
**Continuous Duty**