


UniFLEX™ SPEC 55 Series Electric Strike, Grade 1 Heavy Duty - Factory tested 2500 lbs


STANDARD ANSI 4-7/8" STRIKE PREP - NO CENTERLINE RELOCATION REQUIRED.

5 YEAR LIMITED WARRANTY


One strike with choice of interchangeable faceplates for cylindrical and mortise locksets with or without deadbolts. Designed for new and retrofit hollow metal frame installations. *Frame face modification required.




55-A




55-B




55-C



55-D



55-E



55-F

FEATURES

- Up to 3/4" Latchbolt and 1" Deadbolt
- Field Reversible, Failsafe/Failsecure
- 1/8" Horizontal alignment adjustment
- Dual Voltage 12/24VDC
- Exceeds 1,000,000 cycles
- Factory tested 2500 lbs static strength
- UL tested 1500 lb Static strength
- 70 ft-lb Dynamic strength
- ANSI/BHMA A156.31 Grade 1
- Internal Solenoid, No Heat in Keeper
- All parts stainless steel
- Non-handed



Warnock Hersey Tested according to:
UL 10C, 3 Hr Fire Rated, 4' x 8' single door
NFPA-252

CAN4-S104 (ULC-S104)
(Fail-Secure only).



UL 1034
Burglary-Resistant

BP10254
40WH

SPECIFY MODEL

List

Lockset compatibility: For locksets not listed below, see UniFLEX™ 55 Series datasheet, page 5, faceplate dimension

Deadbolt Application: 55-D, 55-E and 55-F, door will not close with deadbolt extended

MODEL Application

MODEL	Application	
55-A	Compatible with all cylindrical locksets (Grade1 or equivalent)	449.00
55-B	Mortise locksets and exit mortise devices with or without a deadlatch located below the latchbolt. <i>Accurate, Arrow, Best, Corbin Russwin, Dorma, Falcon, Marks, Sargent, Yale.</i>	470.00
55-C	Mortise locksets and mortise exit devices with or without a deadlatch located above the latchbolt. <i>SDC, Schlage, Baldwin, Hager</i>	470.00
55-D	Mortise locksets with a deadbolt and deadlatch located below the latchbolt. <i>Accurate, Arrow, Best, Corbin Russwin, Dorma, Falcon, Marks, Sargent, Yale.</i>	492.00
55-E	Mortise lockset with deadbolt and no deadlatch feature. <i>Baldwin.</i>	492.00
55-F	Mortise locksets with a deadbolt and a deadlatch located above the latchbolt. <i>SDC, Schlage, Hager.</i>	492.00

SPECIFY FINISH

Add to List

U	G	P	N/C
630 Dull Stainless Steel (std)	612 Dull Bronze	625 Bright Chrome	44.00
D 606 Dull brass	H 613 Oil Rubbed Bronze	Q 626 Dull Chrome	44.00

SPECIFY MONITORING OPTIONS

Add to List

LBM/LCM available with 55-A, 55-B, 55-C; LBM/LCM/DBM available with 55-D, 55-E, 55-F

LBM	Latchbolt Monitor. Signals the door is closed and latched or unlatched and open. Non-handed.	65.00
LBM/LCM	Door Secure Monitor. Signals door is closed latched and the keeper is deadlocked. Also signals the door is unlatched or unlocked. Non-handed.	129.00
DBM-L	Deadbolt Monitor, Left Hand (Available with LCM and LBM. For D, E & F functions only)	65.00
DBM-R	Deadbolt Monitor, Right Hand (Available with LCM and LBM. For D, E & F functions only)	65.00

ACCESSORIES

Add to List

RMB	Buzzer, 12/24V. Indicates strike is energized	44.00
BR64XL	Wire Lead Rectifier. Converts AC to DC	27.00
LT	tri-Color LED, red or green or amber. Indicates strike energized per field wiring	33.00

Monitoring Configurations

55-A, 55-B,
55-C:
LBM
LBM/LCM

55-D, 55-E, 55-F:
LBM
LBM/LCM
LBM/LCM/DBM



A



B or C




D or E



F

SDC

SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdcsecurity.com • www.sdcsecurity.com

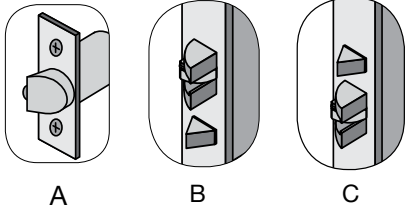


APPLICATION

- Adaptable to all 55-A, 55-B, 55C applications.
- Strike body and 5 faceplates
- For new and retrofit installation
- No relocation of the centerline.
- Non-handed

OPERATION

After releasing the latchbolt, the keeper returns to the locked position.

Finish: 630 Dull Stainless Steel




MODEL APPLICATION

55-ABC Universal Strike for cylindrical locks, mortise locks without deadbolts and mortise exit devices including: *SDC, Accurate, Arrow, Baldwin, Best, Corbin Russwin, Dorma, Falcon, Hager, Marks, Sargent, Schlage, Yale.* **492.00**

Lockset compatibility: For locksets not listed, see UniFLEX™ 55 Series datasheet, page 5, faceplate dimension

Latch and Deadbolt Monitoring Strike Kits

Distributor Discount Code **DK LIST**

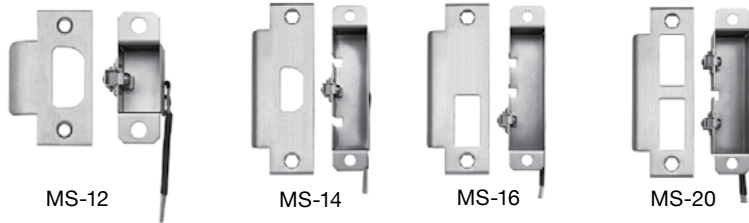

Strikeplates NOT INCLUDED

Provides latch and or deadbolt position status. Compatible with deadbolts, cylindrical locks, mortise locks, and mortise locks with latch and deadbolt. Strike plates shown provided by others. 5 Amp @ 30 VAC/DC

MS-12	Cylindrical latch monitor 2-3/4" SPDT	140.00
MS-12D	Cylindrical latch monitor 2-3/4" DPDT	171.00
MS-14	Cylindrical latch monitor 4-7/8" SPDT	140.00
MS-14D	Cylindrical latch monitor 4-7/8" DPDT	171.00
MS-16	Mortise lock latch monitor SPDT	140.00
MS-16D	Mortise lock latch monitor DPDT	171.00

MS-18	Mortise lock deadbolt monitor SPDT	140.00
MS-18D	Mortise lock deadbolt monitor DPDT	182.00
MS-20*	Mortise lock latch and deadbolt monitor SPDT	171.00
MS-20D*	Mortise lock latch and deadbolt monitor DPDT	230.00

*MS-20 and MS-20D are handed but reversible