



920



920P



920PW


The **920 Series EntryCheck™** stand-alone digital keypad is designed to control access of a single entry point with up to 500 users with a PIN Code and/or HID compatible credentials. Each user is assigned a personal identification number (PIN). Keypad entry of a valid one to six digit code activates one or both of the output relays which releases an electric door lock. Heavy Cast Vandal Resistant Housing. Heavy Cast Metal Blue Backlit Keys.

ELECTRICAL SPECIFICATIONS

Voltage	12/24 VAC/DC — 5-16 VDC for Wiegand (920PW)
Current	30mA typical, 150mA maximum - 60mA max for Wiegand
Outputs (920/920P)	Relay 1 - SPDT 5 Amps @ 30VDC Relay 2 - SPDT 2 Amps @ 30VDC Switch to Common Outputs 3 & 4 - 100mA @ 30VDC
Operating Temperature	-4°F to + 140°F (-20°C to + 60°C)
Operating Humidity	5% to 95% non-condensing
Housing	3"W x 5-3/4"H x 1-7/16"D

920	Stand alone digital keypad	195.00
920P	Stand alone digital keypad with Prox Reader	433.00
920PW	Digital keypad with Prox Reader, Wiegand output	433.00

CARDS, KEY FOBs and TAGS see bottom of page 73

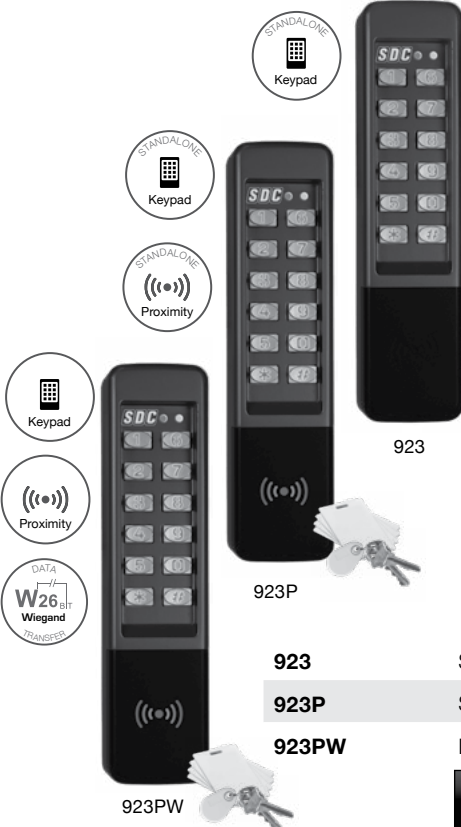

923

923P

923PW

The **923 Series EntryCheck™** narrow stand-alone digital keypad is designed to control access of a single entry point with up to 500 users with a PIN Code and/or HID compatible credentials. Each user is assigned a personal identification number (PIN). Keypad entry of a valid one to six digit code activates one or both of the output relays which releases an electric door lock. Heavy Cast Vandal Resistant Housing. Heavy Cast Metal Blue Backlit Keys.

ELECTRICAL SPECIFICATIONS

Voltage	12/24 VAC/DC — 5-16 VDC for Wiegand
Current	30mA typical, 150mA maximum - 60mA max for Wiegand
Outputs (923/923P)	Relay 1 - SPDT 5 Amps @ 30VDC Relay 2 - SPDT 2 Amps @ 30VDC Switch to Common Outputs 3 & 4 - 100mA @ 30VDC
Operating Temperature	-4°F to + 140°F (-20°C to + 60°C)
Operating Humidity	5% to 95% non-condensing
Housing	1-3/4"W x 7-5/16"H x 1-3/8"D

923	Stand alone digital keypad, narrow	222.00
923P	Stand alone digital keypad, narrow, with Prox Reader	527.00
923PW	Digital keypad, narrow, with Prox Reader, Wiegand output	527.00

CARDS, KEY FOBs and TAGS see bottom of page 73



921P

CARDS, KEY FOBS and TAGS see bottom of page

The **921P** stand-alone digital keypad with Prox Reader and Controller (2-piece configuration) are designed to control access of a single entry point with up to 500 users with a PIN Code and/or HID compatible credentials. Each user is assigned a personal identification number (PIN). Keypad entry of a valid one to six digit code activates one or both of the output relays which releases an electric door lock. Heavy Cast Vandal Resistant Housing. Heavy Cast Metal Blue Backlit Keys.

ELECTRICAL SPECIFICATIONS

Voltage	12/24 VAC/DC
Current	60mA typical, 150mA maximum
Outputs	Relay 1 - SPDT 5 Amps @ 30VDC Relay 2 - SPDT 2 Amps @ 30VDC Switch to Common Outputs 3 & 4 - 100mA @ 30VDC
Operating Temperature	-4°F to + 140°F (-20°C to + 60°C)
Operating Humidity	5% to 95% non-condensing
Housing	921P: 3"W x 5-3/4"H x 1-7/16"D Controller: 5-5/8"H x 7-11/16"W x 3-3/8"D

921P Stand alone, surface mount digital keypad, with Prox Reader and Controller **638.00**



925



925P




925PW



The **925 Series EntryCheck™** elevates the robustness of the indoor/outdoor 920 keypad with a heavy metal privacy and rain shroud. Perfect for post mount applications.

ELECTRICAL SPECIFICATIONS (KEYPAD)


Voltage	12/24 VAC/DC - 5-16 VDC for Wiegand (925PW)
Current	30mA typical, 150mA maximum - 60mA max for Wiegand
Outputs (925/925P)	Relay 1 - SPDT 5 Amps @ 30VDC Relay 2 - SPDT 2 Amps @ 30VDC Switch to Common Outputs 3 & 4 - 100mA @ 30VDC
Operating Temperature	-4°F to + 140°F (-20°C to + 60°C)
Operating Humidity	5% to 95% non-condensing
Shroud Dimension	4-1/16"W x 6-1/8"H x 2-5/8"D



Post mount by others

925 Stand alone digital keypad with privacy shroud **301.00**
925P Stand alone digital keypad with Prox Reader and privacy shroud **540.00**
925PW Digital keypad with Prox Reader, Wiegand output, and privacy shroud **540.00**

Cards, Key FOBS and Tags

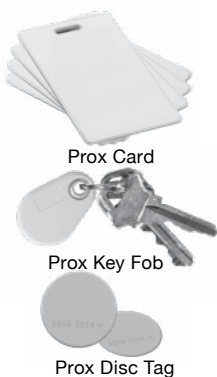

Prox Card

Prox Key Fob

Prox Disc Tag

HID1326-10	Proximity Card, HID compatible, 10 cards	75.00
HID1326-25	Proximity Card, HID compatible, 25 cards	177.00
HID1326-100	Proximity Card, HID compatible, 100 cards	710.00
HID1346-10	Proximity Key Fob, HID compatible, 10 key fobs	145.00
HID1346-100	Proximity Key Fob, HID compatible, 100 key fobs	1,419.00
PTAG-10	Proximity Disc Tag, HID compatible, 10 tags	81.00
PTAG-25	Proximity Disc Tag, HID compatible, 25 tags	193.00

Digital Readers & Keypads