

15 Series

Value 5/8" Latchbolt Electric Strikes




SDC's 15 series value 5/8" latchbolt electric strikes are centerline latch entry strikes designed for use with cylindrical locksets and metal frames. 15 series strikes accept 5/8" throw latchbolts or up to 3/4" throw latchbolts with 1/8" door gap.

The 15 series electric strikes incorporates all stainless steel deadlocking mechanism and an internally mounted solenoid. The compact low profile design enables quick and easy installation where jamb space is limited.

Centerline latch entry strikes require the latch to enter at the strike "centerline" located exactly between the top and bottom of the strike faceplate.*

* Refer to installation instructions and template to determine strike location prior to frame preparation for new and retrofit installations.

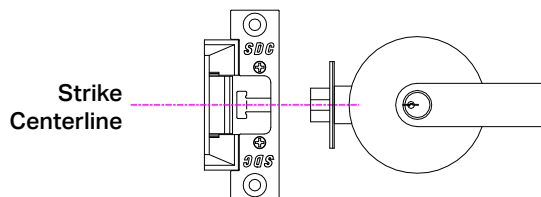

MODELS

15-4F Value 5/8" Latchbolt Strike, Failsafe

15-4S Value 5/8" Latchbolt Strike, Failsecure



STANDARD FEATURES

- Low profile
- Fewer moving parts
- Stainless steel components
- Stainless steel radius corner faceplate
- Durable die cast housing body
- Corrosion resistant
- Mounting tabs included
- Non-handed
- Internally mounted solenoid
- Voltage and current spike protection
- Screw terminals



OPTIONAL FEATURES

- Buzzer




SPECIFICATIONS

	15-4F	15-4S
Latchbolt	5/8" Throw, Up to 3/4" Throw with 1/8" Door Gap	5/8" Throw, Up to 3/4" Throw with 1/8" Door Gap
Operation	Failsafe	Failsecure
Keeper Depth	1 1/2"	1 1/2"
Weight	2 lbs	2 lbs
Faceplate	Radius Corner Stainless Steel, 4 7/8" x 1 1/4"	Radius Corner Stainless Steel, 4 7/8" x 1 1/4"
Frame Application	Hollow Metal / Aluminum	Hollow Metal / Aluminum
Input	12/24 VDC ± 10%	12/24 VDC ± 10%
Current Draw	200 mA @ 12 VDC 150 mA @ 24 VDC	200 mA @ 12 VDC 150 mA @ 24 VDC

HOW TO ORDER

FOLLOW STEPS FOR ORDERING


 Designates optional step

1| SPECIFY MODEL

15-4F Value 5/8" Latchbolt Strike, Failsafe

15-4S Value 5/8" Latchbolt Strike, Failsecure

3| SPECIFY FINISH

U 630 Dull Stainless 

2| SPECIFY VOLTAGE

12 12 VDC

24 24 VDC

4| SPECIFY OPTIONS

RMB Buzzer

STEP NUMBER:	1	2	3	4
ORDERING EXAMPLE:	15-4F	24	U	RMB

RELATED PRODUCTS

BRIDGE RECTIFIERS
BR64XL AC to DC Bridge Rectifier

