

# 25 Series

## Value 1/2" Latchbolt Electric Strikes




SDC's 25 series value 1/2" latchbolt electric strikes are centerline latch entry strikes designed for use with cylindrical locksets and metal frames. 25 series strikes accept 1/2" throw latchbolts or up to 3/16" throw latchbolts with 1/8" door gap.

The compact low profile design with an internally mounted solenoid and factory supplied mounting tabs enables quick and easy installation where jamb space is limited. The heavy duty construction makes 25 series strikes ideal for high traffic installations.

Centerline latch entry strikes require the latch to enter at the strike "centerline" located exactly between the top and bottom of the strike faceplate.\*

\* Refer to installation instructions and template to determine strike location prior to frame preparation for new and retrofit installations.

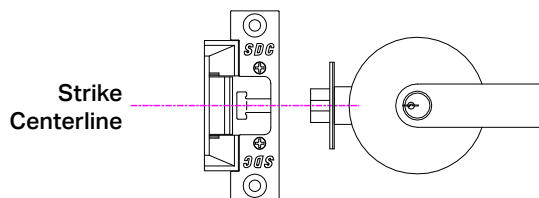

### MODELS

**25-4** Value 1/2" Latchbolt Strike

### STANDARD FEATURES

- Low profile
- Fewer moving parts
- Stainless steel components
- Stainless steel square corner faceplate
- Durable die cast housing body
- Corrosion resistant
- Mounting tabs included
- Non-handed
- Internally mounted solenoid
- Field selectable operation
- Field selectable dual voltage
- Voltage and current spike protection
- Screw terminals
- Latch status (LS)

### OPTIONAL FEATURES

- Buzzer



## SPECIFICATIONS

<b>25-4</b>	
<b>Latchbolt</b>	1/2" Throw, Up to 3/16" Throw with 1/8" Door Gap
<b>Static Strength</b>	1,000 lbs
<b>Dynamic Strength</b>	50 lbs
<b>Endurance Cycles</b>	250,000
<b>Keeper Depth</b>	1 1/4"
<b>Weight</b>	2 lbs
<b>Faceplate</b>	Square Corner Stainless Steel, 4 7/8" x 1 1/4"
<b>Frame Application</b>	Hollow Metal / Aluminum
<b>Input</b>	12/24 VDC ± 10%
<b>Current Draw</b>	200 mA @ 12 VDC 100 mA @ 24 VDC
<b>Latch Status (LS)</b>	SPDT 3 Amps @ 30 VDC Resistive

## CERTIFICATIONS


UL 1034 Burglary-Resistant Electric Locking Mechanisms  
ANSI/BHMA A156.31

## HOW TO ORDER

### FOLLOW STEPS FOR ORDERING

 Designates optional step

**1| SPECIFY MODEL**  
**25-4** Value 1/2" Latchbolt Strike

**2| SPECIFY FINISH**  
**U** 630 Dull Stainless  Standard

**3| SPECIFY OPTIONS**  
**RMB** Buzzer

STEP NUMBER:	1	2	3
ORDERING EXAMPLE:	<b>25-4</b>	<b>U</b>	<b>RMB</b>

## RELATED PRODUCTS

BRIDGE RECTIFIERS  
**BR64XL** AC to DC Bridge Rectifier

