

# EP493

## Explosion Proof Pull Station



Specifically designed for applications where flammable vapors are cause for concern, like clean room, chemical plant, or refinery environments.

UL listed for use in hazardous locations CLASS I, Group B, C, D;  
CLASS II, Group E, F, G; Class III; Type 4X outdoor



### FEATURES

- High-Strength Metal Die-Cast Alloy
- Terminal Block Connection
- DPDT switch rated @ 10 amps



### APPLICATIONS

- Chemical Plants
- Refineries
- Paint Shops
- Cleaning Facilities
- Loading Facilities for flammable gases



### MODELS

**EP493** Explosion Proof Pull Station





## SPECIFICATIONS

Current	10 amps @ 125/250 VAC
Contacts	DPDT
Wire AWG	12 to 22 AWG



## ACCESSORIES



**602RF** 1 Amp, class 2 output Power Supply with optional controller and batteries




**EP17624** Explosion Proof Magnetic Lock with conduit on sideblock

**EP17624TJ** Explosion Proof Magnetic Lock with conduit on top panel, includes Top Jamb mounting bracket



## System Components Considerations

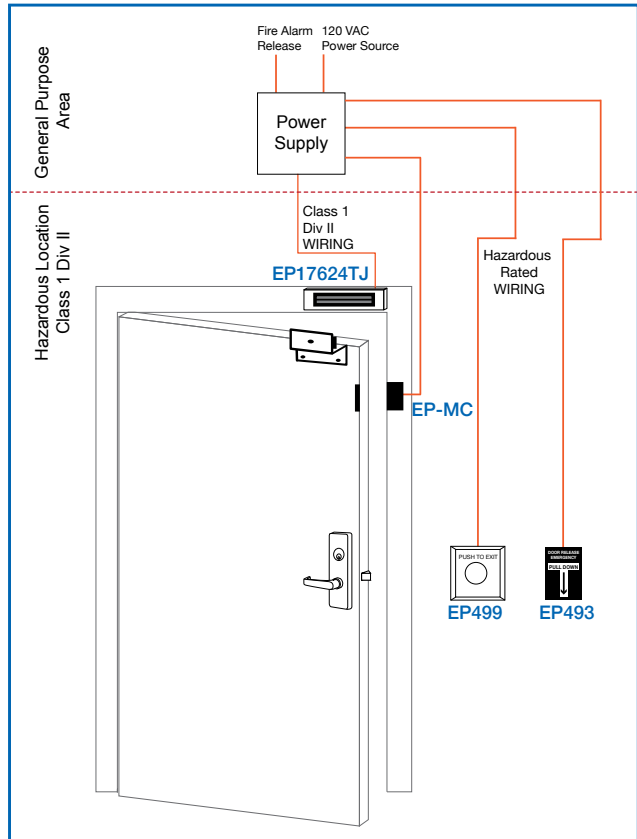

\* Intrinsic Safety Barrier by others



**EP499** Explosion Proof Exit Switch



**EP-MC** Explosion Proof Door Contact

