

FB-4

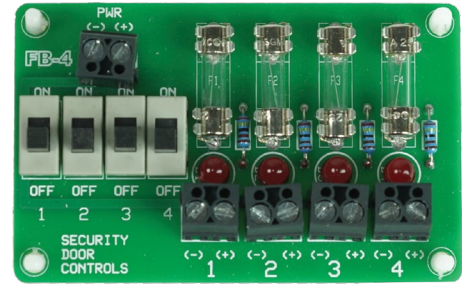
Four Output Power Distribution Modules

Door control relay modules ensure compatibility of access hardware components and simplify system installation and troubleshooting. Modules may be ordered with or without power supplies. Different modules may be specified for one power supply.

Modules may be ordered with or without power supplies. Different function modules may be used in the same power supply or cabinet.

SDC's FB-4 series allows for precisely calculated circuit protection with four, 2 Amp fuse protected outputs. Distributing the primary DC output of any 600 series power supplies into four, individually fused class 2 outputs to provide up to sixteen outputs and allow for termination of multiple DC devices for ease of maintenance.

Additionally, four on/off switches allow individual control of voltage outputs. LED visual status indicators provide relay activation status.



MODELS

FB-4 Four Output Power Distribution Module

STANDARD FEATURES






- Four modules, sixteen total outputs
- Four, individually fused class 2 outputs
- Four separate outputs for maintenance ease
- Four on/off switches to individually control voltage outputs
- Auto-sensing dual voltage
- Visual status indicators (LED)



APPLICATIONS

Distribute a single voltage output to 4 devices.

CROSS REFERENCE

Series	CR4	ACM-1	EMC	FB-4	12VR
					
Description	Four station control relays	Six input control relays	Dual channel exit device sequencers	Four output power distribution modules	Voltage power converters
Application	Individual control of four locks	Control one lock with up to six activation devices	Sequence electrified panic device and operator for single or pair of doors	Distribute a single voltage output to four devices	Convert 24 VDC to regulated 12 VDC output
Inputs	(4) N/O, Dry	(3) N/O, Dry (3) N/C, Dry	(2) N/O, Dry	(1) Power, 12/24 VDC	(1) Power, 24 VDC
Outputs	(4) SPDT, Fused, Wet or Dry (4) SPDT, Unfused, Wet or Dry	(1) SPDT, Wet (1) SPDT, Dry	(4) N/O, Dry	(4) Fused Class 2, On/Off, 12/24VDC (Matches input)	(1) Fused Class 2, 12 VDC (1) Fused Class 2, 24 VDC
	CLICK TO VIEW	CLICK TO VIEW	CLICK TO VIEW	CLICK TO VIEW	CLICK TO VIEW

SPECIFICATIONS

	FB-4
Input	12/24 VDC ± 10%
Dimensions	3¼" x 2"
Fuses	2 Amp (Per Output)
Output Configuration	(4) Individually Fused

HOW TO ORDER

FOLLOW STEPS FOR ORDERING

 Designates optional step

1| SPECIFY MODEL

FB-4 Four Output Power Distribution Module

STEP NUMBER: 1

ORDERING EXAMPLE: **FB-4**