


Paniclok Exit Device Release

Distributor Discount Code **AK LIST**

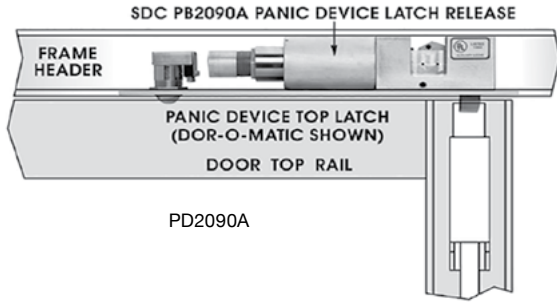

For Dor-O-Matic and Kawneer Exit Device
Voltage: 24VDC, 2.5 A Inrush, .4A seated

MODEL

PD2090ALCU	LH/RHR failsecure	573.00
PD2090ARCU	RH/LHR failsecure	573.00

Standard Finish: U 630 Dull stainless steel

Electric Bolt Locks

Gate Locks

Distributor Discount Code **AK LIST**



GL163A
GL263A

Designed for outdoor installation on swinging or sliding gates, Black Finish. Specify swinging or sliding gate

	12/24VDC 900/450 mA		12/24 VDC 900/450 mA	
GL160AI	Fail-safe	915.00	GL260AH	Fail-secure 915.00
GL163AI	Key switch, fail-safe	981.00	GL263AH	Key switch, fail-secure 981.00
			GL260MRAH	Mechanical key unlock, fail-secure 1,026.00

Key cylinder not included


SPECIFY HAND - for convenience, field reversible

RH	Right hand	LH	Left hand	N/C
-----------	------------	-----------	-----------	------------

OPTIONS Add to List

D	Gate position sensor SPDT for gate lock (GL series)	89.00
B	Bolt position sensor, SPDT for gate lock	89.00
BR64XL	Rectifier for AC operation	28.00

KEY CYLINDER OPTIONS Add to List

	CYL-6KDQ	6 pin, 1.125" mortise cylinder, keyed different, dull chrome	49.00
	CYL-6KAQ	6 pin, 1.125" mortise cylinder, keyed alike, dull chrome	49.00