


ACCESS & EGRESS SOLUTIONS

ACCESS CONTROL
IP-based | Keypads | Standalone

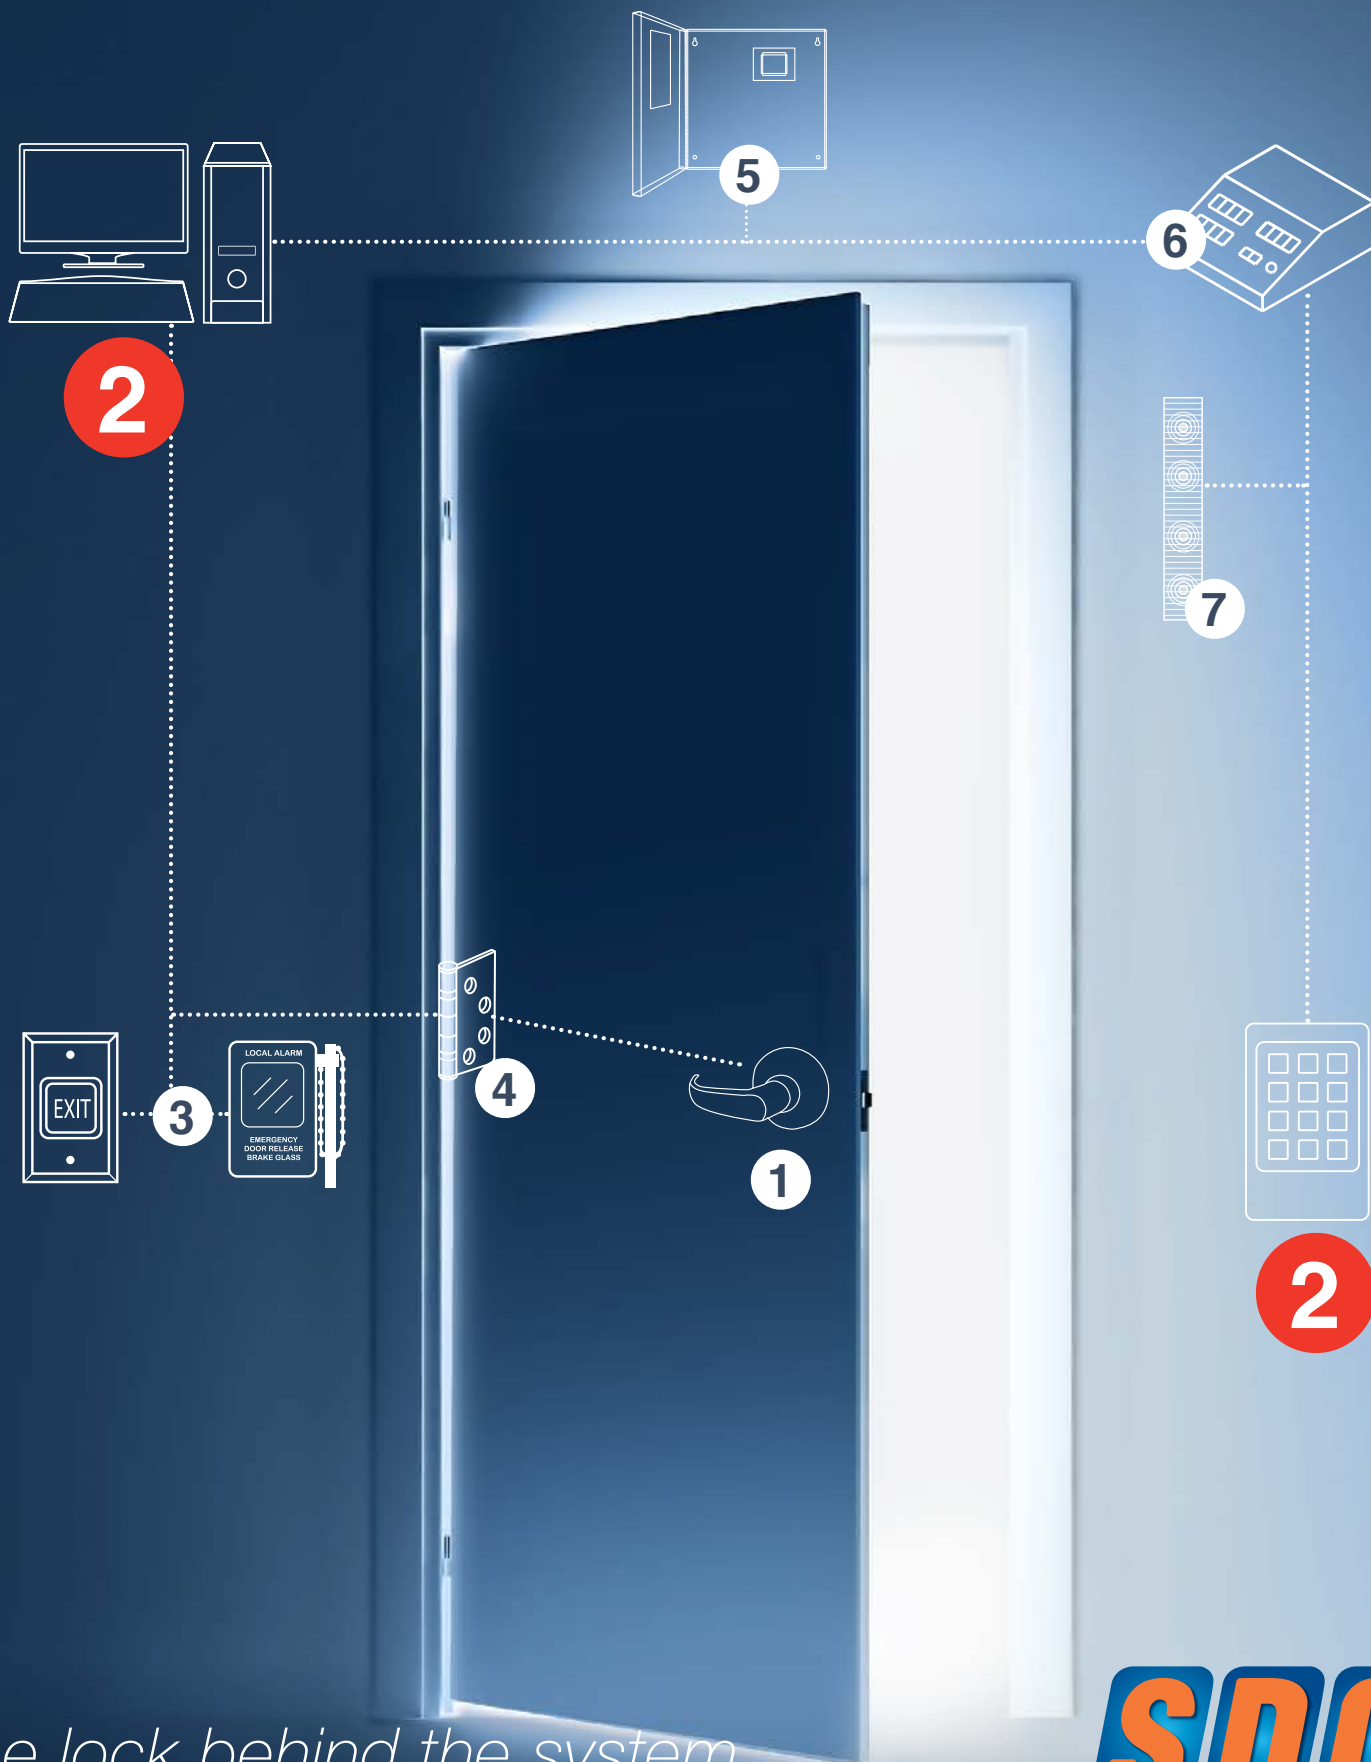

The lock behind the system

SDCSecurity.com

800.413.8783

service@sdcssecurity.com

SDC
Security Door Controls


Complete Component Considerations

Standalone



1 Locking Device

- Electric Strike
- Delayed Egress Lock
- Electric Bolt Lock
- Electrified Lockset
- Exit Device
- Frame Actuator Lockset
- Magnetic Lock

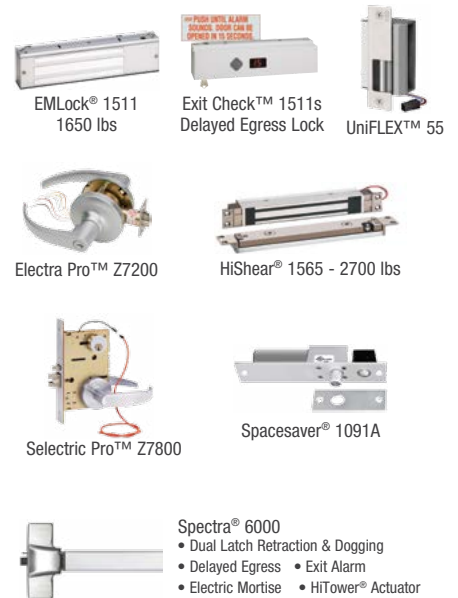

2 Access Control

Standalone or Network


- Keyswitch
- Digital Keypad
- Card Reader



3 Egress Device

- Exit Switch
- PIR Egress Sensor
- Exit Sense Bar
- Emergency Door Release
- ADA Compliant Solutions




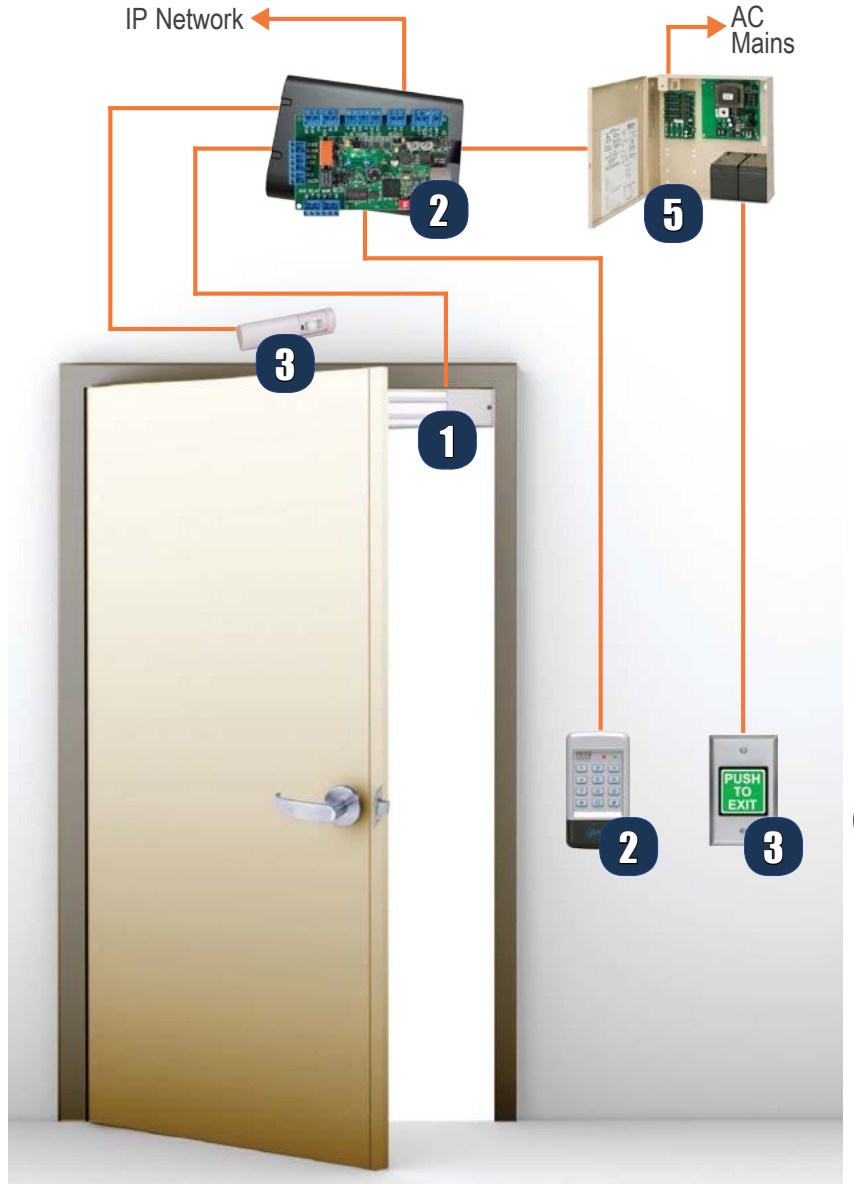

4 Power Transfer Devices


Required With Locksets & Exit Devices

- Electric Power Hinge
- Power Transfer Loop
- Concealed Power Transfer

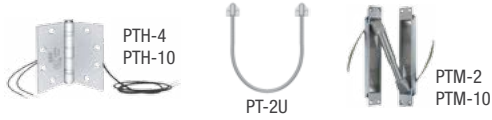

5 Power Supply & Door Controller

- 12/24VDC, Class 2
- Fire release input
- System Status LED's
- Multiple Fused Outputs
- Multiple Relay Configurations
- Universal Programmable Controllers

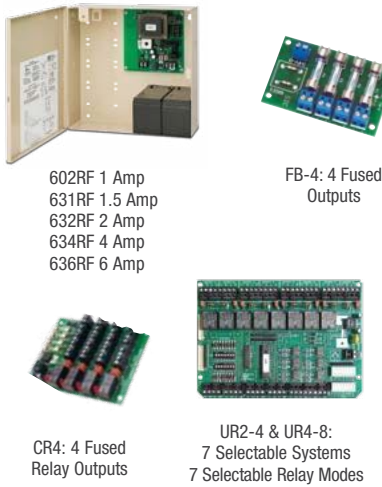

6 Remote Controls




7 Annunciators



8 Accessories & Misc


- Magnetic Door Holder Release Device

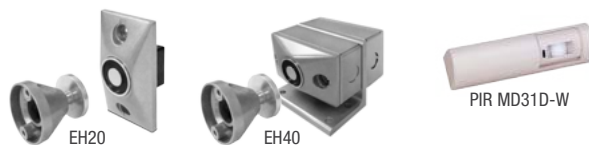




Digital & Card Access Control Systems


It's one thing to design and manufacture Locking Devices for door access and egress control, it's another thing to tie them all together with Physical Access Control components and systems to both protect people and assets while ensuring code compliance. SDC's digital and card access control systems are engineered to provide real-world door control of a single opening up to 100 doors, from indoor and stand-alone applications, to outdoor and PC-based systems. All while ensuring fire and life safety code compliance along with superior expandability and flexibility in authorization identification, authentication, access approval, and accountability of entities through login credentials - including passwords and personal identification numbers (PINs).

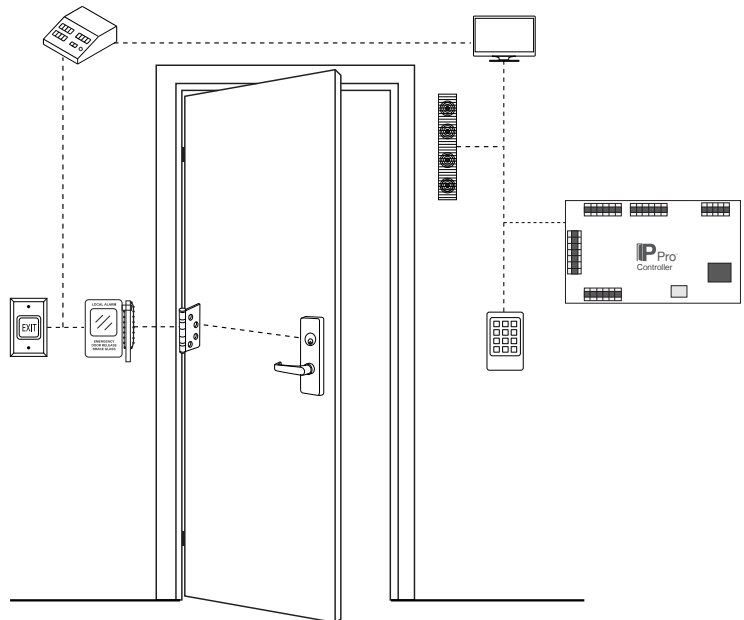

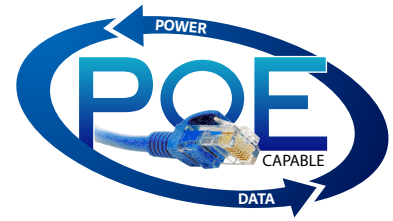

IP-based Access Control

The IP Pro® is a Single Door IP Controller with Expandability, Supporting up to 15,000 Users

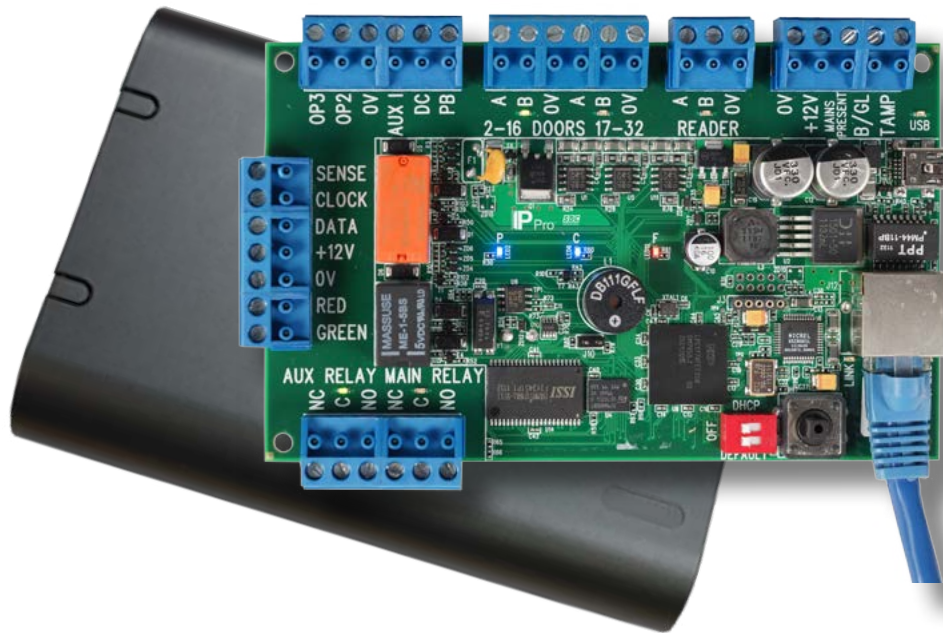

FEATURES

- Controls one door directly, with unlimited expansion capabilities
- TCP/IP communications (100/10Mbps)
- DHCP or Static IP addresses
- Password protected built-in web server or FREE downloadable 'Grid' software
- Live transaction monitoring
- Entry & exit reader capability
- Supports industry standard proximity, smart card, and multi-technology readers (Wiegand output)
- Reader short circuit protection
- Compliant with PoE+ standard
- 15,000 users (up to 2 credentials per user)
- Batch card enrollment
- 250 User groups/Time Zones/Door Groups
- Holiday support
- Scheduled Events
- Temporary Users
- Audit Trail – Up to 5,000 events from on-board storage, unlimited events vs PLUS software (limited only by your allocated server space)
- Status LED's – Power, Communications, & Fault on-board diagnostic indicators
- Anti-tailgating
- Anti-passback (global or localized)
- Supported browsers: Microsoft Internet Explorer, Firefox, Google Chrome
- Multiple credential modes: Card only, PIN only, Pin or Card, Pin & Card
- Door Status Monitoring Input
- Request-to-Exit (REX) Input
- Programmable Auxiliary Input
- Lock Relay Output
- Auxiliary Relay Output
- (2) Programmable Solid-state Outputs
- Tamper Input
- Database backup support





MODELS


- IPDC** IP Pro Controller Board Only
- IPDCE** IP Pro Controller Board Plus Enclosure
- IPDS** IP Pro Door Station Expansion Board Only
- IPDSE** IP Pro Door Station Expansion Board Plus Enclosure
- IPPRO-SKE** IP Pro Starter Kit, Including Controller Board, Splitter, Injector, Plus Controller Enclosure
- IPPRO-SK** IP Pro Starter Kit, Including Controller Board, Splitter, Injector
- IPI-30** IP Pro Injector 30W PoE+
- IPS-12** IP Pro Splitter 12VDC PoE+
- IPRW** IP Pro Wiegand Reader - PROX, HID Compatible (125 kHz)

SPECIFICATIONS

IP Pro Controller/ Door Station Expansion	
Voltage	12 VDC Input
Current Consumption (max)	250mA - Controller 120mA - Door Station Expansion
Operating Temperature	14°F – 122°F (Indoor Use Only)
Dimensions	5.375" x 3.5" x 0.875" Board Only 9.25" x 6.5" x 2.1875" w/ ABS Plastic Enclosure
Weight	1lb
Relay Output Type	Form C (SPDT) x 2
Relay Contact Rating	Main (Lock) – 5A @ 30VDC Auxiliary – 1A @30VDC
Connections	Digital Inputs: 4 Dry Contact Inputs Ethernet: RJ45 (Controller Only) RS-485 Terminal Bus Reader Power – 12VDC Reader Data – Wiegand (26bit to 37bit) Reader LED Control – Red & Green Two Solid State Outputs (100mA Max)
Weight	1.4 lbs
IP Pro Splitter	
Input voltage	44 - 57 VDC
Input power	30W Max
Output power	24W Max
Output Current	2A @ 12V
IP Pro Injector	
PoE+ Output Pin Assignment & Polarity	4/5 (+), 7/8 (-)
Output Power Voltage	55VDC
User Port Power	30 Watts (Guaranteed)

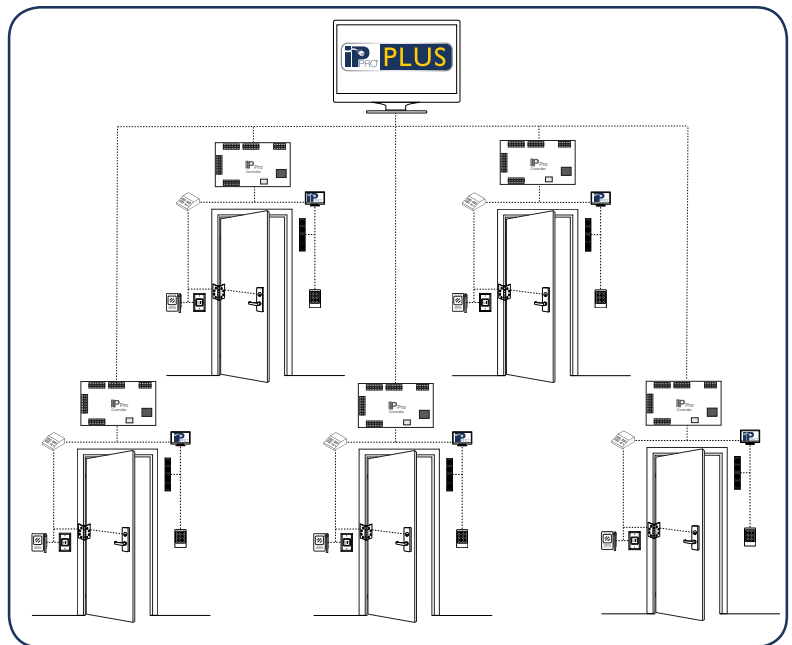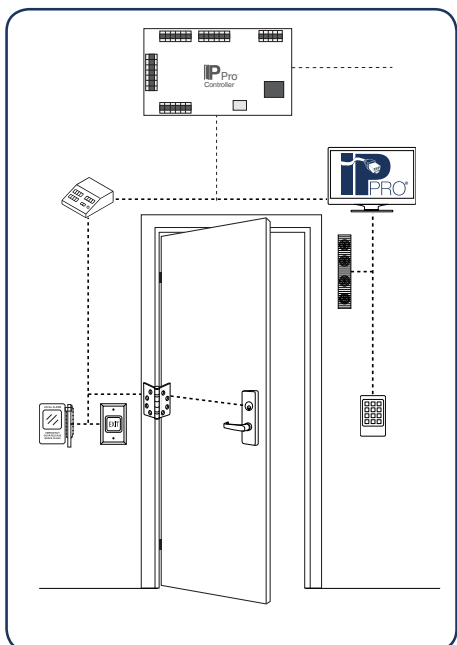

Install - Expand - Control



- Embedded software
- Browser Accessible
- 1 to 32 doors



- FREE Access Control Software
- PC Accessible
- 1 to 100 doors

EMBEDDED software managed via web browser




or Download FREE SOFTWARE for full Grid Access



Our new PLUS PC-Client software is available as a free download to provide door access control for up to 100 doors from a single PC. PLUS is a role-based access control software suite with different interface modules, depending on user type.




PLUS Hardware is used by the installer to set up controllers, doors and user profiles

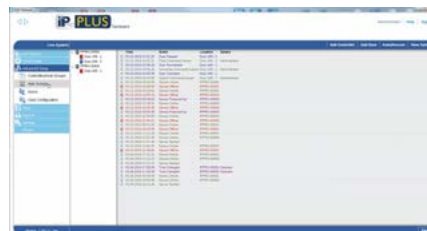


- Enable & edit IPPro controllers
- Enable & edit door settings
- Create event filters
- Enable e-mail notifications

PLUS Manage is used by system administrators to facilitate database changes required on a day-to-day basis, and offers various reporting tools

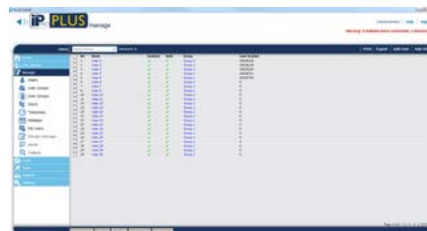

- Create, view, & edit users
- Add access & holiday schedules
- Generate user & event reports

PLUS Server is used by system administrators to perform specialized tasks, such as database backups, firmware updates, importing/exporting users

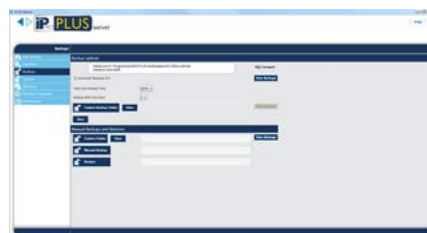

- Perform manual or schedule automatic backups
- Import/Export Users
- Perform IPPro firmware updates

Live System events can be monitored from either module!

IP Pro™ Access Control Solution

Single Door Electrified Lock Application

1 Access Control



2 Power Supply 12 and 24VDC Output




3 Wiegand Reader Options (Choose one):
Prox Reader or Keypad-Prox Combo



4 Electrified Lock (Choose one):
Cylindrical or Mortise



5 Power Transfer Hinge 4 Wire, 4" x 4"

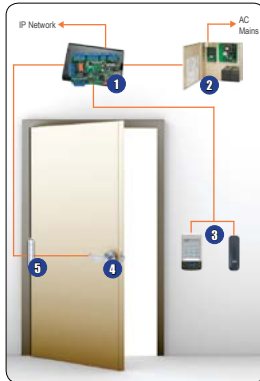

SYSTEM OPERATION

Door is normally closed and secured by an electrified lockset.

Emergency Override: The door may be accessed by key override.

Authorized Access: Presenting a valid card or entering a valid user code on the reader will momentarily unlock the door for access. The unlock time will be configured by the access control programming. The door may also be programmed for maintained access.

Low Voltage: System is powered by a regulated & filtered power supply with 12VDC output for access control equipment and 24VDC output for locking hardware to maximize efficiency. Loss of power will result in unsecured door, unless equipped with optional battery back-up.

IP-based Access Control: User-friendly programming interface via a built-in web server, accessible from any networked PC.

SDC (800) 413-8783 • www.SDCsecurity.com

IP Pro™ Access Control Solution

Single Door Electric Strike Application

1 Access Control




2 Power Supply 12 and 24VDC Output



3 Wiegand Reader Options (Choose one):
Prox Reader or Keypad-Prox Combo



4 Electric Strike (Choose one):
Centerline Latch Entry or No Center Line Relocation*

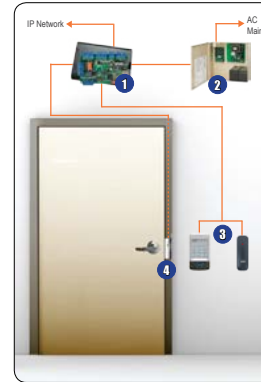

SYSTEM OPERATION

Door is normally closed and secured by an electrified lockset.

Emergency Override: The door may be accessed by key override.

Authorized Access: Presenting a valid card or entering a valid user code on the reader will momentarily unlock the door for access. The unlock time will be configured by the access control programming. The door may also be programmed for maintained access.

Low Voltage: System is powered by a regulated & filtered power supply with 12VDC output for access control equipment and 24VDC output for locking hardware to maximize efficiency. Loss of power will result in unsecured door, unless equipped with optional battery back-up.

IP-based Access Control: User-friendly programming interface via a built-in web server, accessible from any networked PC.

SDC (800) 413-8783 • www.SDCsecurity.com

IP Pro™ Access Control Solution

Single Door Electric Latch Retraction Application

1 Access Control



2 Power Supply 12 and 24VDC Output




3 Wiegand Reader Options (Choose one):
Prox Reader or Keypad-Prox Combo



4 Exit Device Electric Latch Retraction (Choose one):
Complete Device or Field Retrofit Kit



5 Power Transfer Device (Choose one):
Wire Transfer Hinge or Loops

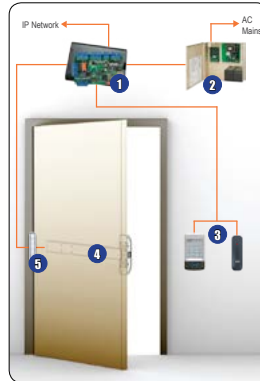

SYSTEM OPERATION

Door is normally closed and secured by an exit panic device.

Authorized Egress: Free egress is available at all times by pressing the exit device pushpad, retracting the latch, and opening the door.

Authorized Access: Presenting a valid card/rob or entering a valid user code on the keypad will momentarily retract the latch on the exit device, permitting access. The unlock time will be configured by the access control programming. The door may also be programmed for maintained access (doggings).

Low Voltage: System is powered by a regulated & filtered power supply with 12VDC output for access control equipment and 24VDC output for locking hardware to maximize efficiency. Loss of power will result in unsecured door, unless equipped with optional battery back-up.

IP-based Access Control: User-friendly programming interface via a built-in web server, accessible from any networked PC.

SDC (800) 413-8783 • www.SDCsecurity.com

IP Pro™ Access Control Solution

Single Door Magnetic Lock Application

1 Access Control



2 Power Supply 12 and 24VDC Output



3 Wiegand Reader Options (Choose one):
Prox Reader or Keypad-Prox Combo



4 Electro-Magnetic Lock (Choose one):
1200lbs Holding Force



5 Request-To-Exit (Choose one or more):
Push Button & Motion Release



SYSTEM OPERATION

Door is normally closed and secured by an electromagnet lock.

Manual Release Override: Pressing the code-compliant "Push to Exit" button will bypass the keypad and motion sensor, unlocking the door for a fixed 30 seconds.

Authorized Access: Presenting a valid card/rob or entering a valid user code on the keypad will momentarily unlock the door for access. The unlock time will be configured by the access control programming. The door may also be programmed for maintained access.

Low Voltage: System is powered by a regulated & filtered power supply with 12VDC output for access control equipment and 24VDC output for locking hardware to maximize efficiency. Loss of power will result in unsecured door, unless equipped with optional battery back-up.

Authorized Egress: Activating the Request-to-Exit (REX) motion sensor will unlock the magnetic lock allowing the door to be opened. The unlock time will be configured by the access control programming.

IP-based Access Control: User-friendly programming interface via a built-in web server, accessible from any networked PC.

Fire & Life Safety: A signal from the Fire Alarm Panel will immediately unlock the magnetic lock.

SDC (800) 413-8783 • www.SDCsecurity.com

Download IP Pro Access Control Solution System Designs on our website at sdsecurity.com/IPPro.htm

IP Pro® IPRW Wiegand Reader



The SDC IPRW is the perfect companion for our IP Pro® Controller. It provides 26-bit Wiegand output while being HID proximity compatible. Use as Entry or Exit Reader with the IP Pro® System

SPECIFICATIONS

Operating Voltage	5-12 VDC
Current Consumption	40mA
Housing	Indoor/Outdoor (IP67) w/potted electronics
Temperature	-4°F to + 122°F
Dimensions	4.75"H x 1.5"W x .625"D
Output	26-bit Wiegand
HID-compatible	125Khz RFID
Max. Cable Distance to Host	328ft @ 12VDC, 100ft @ 5VDC
Weight	.6 lbs

MODELS

IPRW IP Pro® Wiegand Reader - PROX, HID compatible

ACCESSORIES

PROX CARDS AND KEY FOBS

- HID1326-25** HID ProxCard® II, 25 Cards
- HID1326-100** HID ProxCard® II, 100 Cards
- HID1346-10** HID ProxKey® II, 10 Key Fobs
- HID1346-100** HID ProxKey® II, 100 Key Fobs





EntryCheck™ 918

Digital Keypad




The SDC EntryCheck™ 918 Series are indoor stand alone digital keypads designed to control access of a single entry point for facilities with up to 500 users. Each user is assigned a personal identification number (PIN). Keypad entry of a valid one to six digit code activates one or both of the output relays which releases an electric door lock.



The SDC EntryCheck™ 918W is designed to interface with most access control systems and provides a standard 26-bit Wiegand output.

FEATURES

- 12-Key Illuminated, Moisture-Resistant 3 x4 Keypad
- Tamper-Resistant Screws
- Single-Gang Mount
- Programmable Site Code (918W)
- Dual LED Status Indicators
- Adjustable Audible Annunciation
- Configurable Illumination: On, Off, Timed
- 4 Outputs, 2 Relay and 2 Solid State
- Outputs Timed or Latching (On/Off)
- Assign Entry PIN's to Relays 1 and/or 2
- LED Status: Access, lockout
- Tactile Keys with Selectable Audible Levels for Key Depression or Output Activation
- Timed Anti-Passback, Anti-Tailgate
- Keypad Tamper Lockout
- Request-to-Exit/Enter Input
- Thick Stainless Steel Faceplate 3/32"

MODELS

 **918** Standalone Digital Indoor Keypad


 **918W** Indoor Keypad with Wiegand Output Single Gang 



PROGRAMMING OPTIONS

The 918 EntryCheck™ includes a Door Sense/Inhibit Input feature. When programmed for “Door Sense”, a door position switch wired into the input and detects a “forced entry” or “door ajar” condition. When programmed for “Inhibit Input”, a maintained switch or automatic timer wired into a the input will disable the activation of

the main relay. The EntryCheck™ also has a request-to-exit input for connection to an exit switch and/or fire access key switch for fire/emergency access. When access is granted, the shunt option is activated shunting alarm contacts on the door or gate. This prevents triggering of an alarm during authorized access.

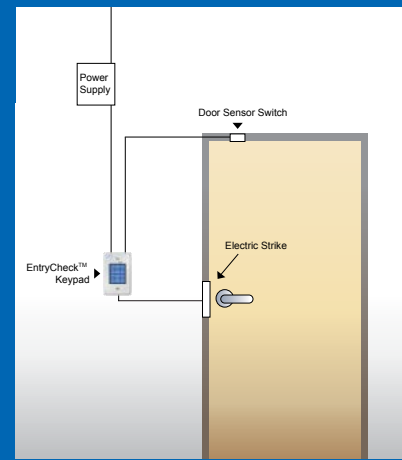

918 SPECIFICATIONS

Voltage	12/24 VAC/DC
Current	30mA Typical, 150mA Maximum
Outputs	Relay 1 - SPDT 5 Amps @ 30VDC Relay 2 - SPDT 2 Amps @ 30VDC Switch to Common Outputs 3 & 4 - 100mA @ 30VDC
Temperature	-10°F to + 130°F
Humidity	5% to 95% Non-Condensing
Finish	Brushed Stainless Steel
Dimensions	3"W x 4-3/4"H x 1-1/2"D (1/4" Wall Projection)
Weight	.5 lbs

918W SPECIFICATIONS

Keypad	Brushed Stainless Steel 3/32" Thick
Voltage	5-16 VDC
Current	30mA Typical, 60mA Max.
Keypad Output	26-bit Wiegand
Wiring	6" Pigtail
Temperature	-10°F to + 130°F
Humidity	5% to 95% Non-Condensing
Dimensions	3"W x 4-3/4"H x 1"D (1/4" Wall Projection)
Weight	.5 lbs

PRODUCT SKU SAMPLE: **918W H TR12**

HOW TO ORDER

1| SPECIFY MODEL

- 918** Standalone Digital Indoor Keypad
- 918W** Indoor Keypad with Wiegand Output

2| SPECIFY FINISH

- U** 630 Satin Stainless Steel
- C** 605 Bright Brass
- D** 606 Dull Brass
- H** 613 Oil Rubbed Bronze
- P** 625 Bright Chrome

3| SPECIFY OPTIONS (OPTIONAL)

- TR12** Plug in Power Supply 120 VAC
Primary. Output: 12VDC @ 1 Amp.
Secondary Screw Terminals

ACCESSORIES

PRIVACY SHROUD PRIVACY PROTECTION



- 900-PS** Privacy Shroud, Ensure Privacy for Standalone Digital Keypads.



EntryCheck™ 920 Series Digital Keypads



The SDC EntryCheck™ 920 Series indoor/outdoor digital keypads are designed to control access of a single entry point with up to 500 users. Each user is assigned a personal identification number (PIN). Keypad entry of a valid one to six digit code activates one or both of the output relays which releases an electric door lock. Featuring heavy cast vandal resistant housing and cast metal blue backlit keys.

The SDC EntryCheck™ 920P adds HID proximity reader capability to the keypad. The 920PW is designed to interface with most access control systems and provides a standard 26-bit Wiegand output.

FEATURES

- Digital Keypad with or without Wiegand Output for Universal Compatibility
- Weather & Vandal Resistant Housing with Tactile Metal Keys
- HID-Compatible Proximity Reader (920P and 920PW only)
- 12-Key Illuminated, 3" x 4" Keypad
- Surface or Single-Gang Mount
- Built-In Tamper Switch
- Programmable Site Code (920PW)
- Dual LED Status Indicators
- Adjustable Audible Annunciation
- Configurable Illumination: On, Off, Timed

PROX ONLY:

3 User Modes:

- PIN or Card
- Card Only
- Card and PIN
(HID-Compatible: 125kHz-RFID)


MODELS	
920	Standalone Digital Keypad
920P	Standalone Digital Keypad with Prox Reader
920PW	Digital Keypad with Prox Reader and Wiegand Output



PROGRAMMING OPTIONS

The 920 EntryCheck™ series includes a Door Sense/Inhibit Input feature. When programmed for “Door Sense”, a door position switch wired into the input and detects a “forced entry” or “door ajar” condition. When programmed for “Inhibit Input”, a maintained switch or automatic timer wired into the input will disable the activation

of the main relay. The EntryCheck™ also has a request-to-exit input for connection to an exit switch and/or fire access key switch for fire/emergency access. When access is granted, the shunt option is activated shunting alarm contacts on the door or gate. This prevents triggering of an alarm during authorized access.

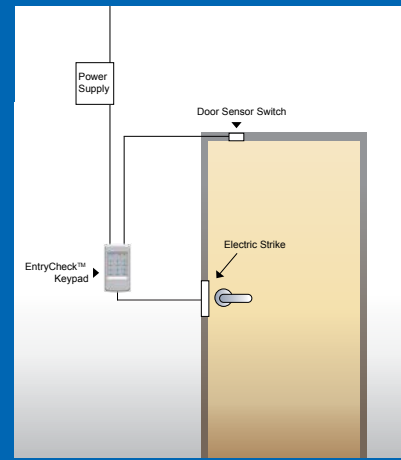

920 & 920P SPECIFICATIONS

Voltage	12/24 VAC/DC
Current	30mA Typical, 150mA Maximum
Outputs	Relay 1 - SPDT 5 Amps @ 30VDC Relay 2 - SPDT 2 Amps @ 30VDC Switch to Common Outputs 3 & 4 – 100mA @ 30VDC
Temperature	-22°F to + 149°F
Humidity	5% to 95% Non-Condensing
Finish	Powder Coat Painted Cast Metal
Mount	Surface Mount
Dimensions	3"W x 5-3/4"H x 1-7/16"D (1.5" Wall Projection)
Weight	2.0 lbs

920PW SPECIFICATIONS


Keypad Housing	Powder Coat Painted Cast Metal
Voltage	5-16VDC
Current	30mA Typical, 60mA Max.
Reader Output	26-bit Wiegand
Reader Frequency	125kHz
Keypad Output	26-bit Wiegand or 4-bit Word
Wiring	6" Pigtail
Temperature	-22°F to +149°F
Humidity	5% to 95% Non-Condensing
Finish	Powder Coat Painted Cast Metal
Weight	2.0 lbs

ACCESSORIES

PROX CARDS AND KEY FOBs


	HID1326-25	HID ProxCard® II, 25 Cards	
	HID1326-100	HID ProxCard® II, 100 Cards	
	HID1346-10	HID ProxKey® II, 10 Key Fobs	
	HID1346-100	HID ProxKey® II, 100 Key Fobs	

PRIVACY SHROUD PRIVACY & RAIN PROTECTION

	900-PS	Privacy Shroud, Ensure Privacy and Rain Protection for Standalone Digital Keypads.
---	---------------	--



EntryCheck™ 923 Series Digital Keypads

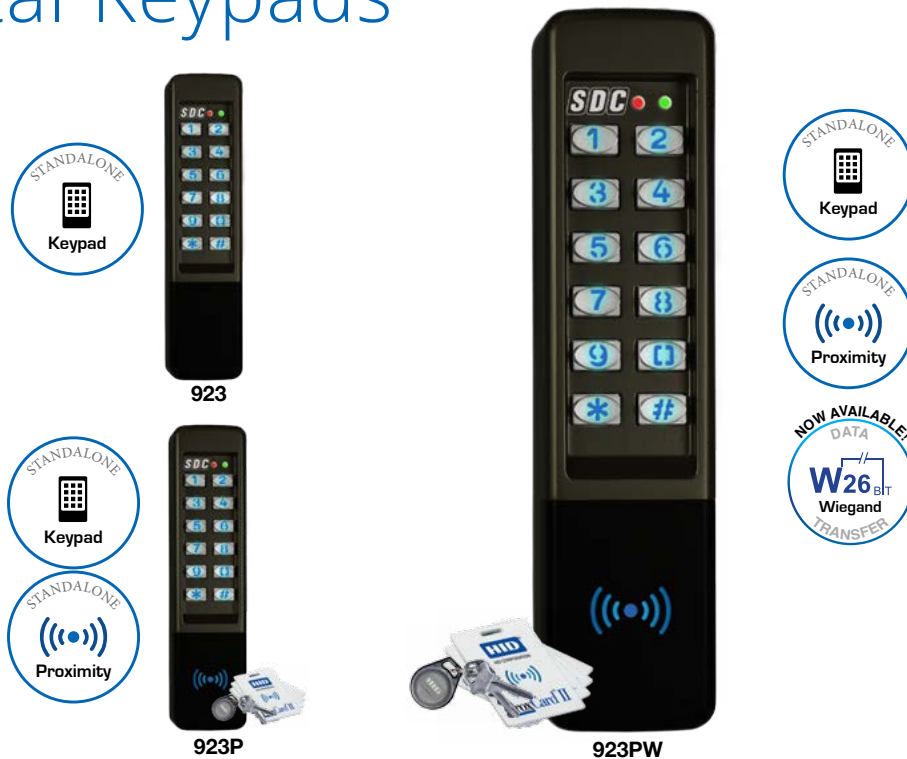

The SDC EntryCheck™ 923 series narrow indoor/outdoor stand-alone digital keypads are designed to control access of a single entry point for facilities with up to 500 users. Each user is assigned a personal identification number (PIN). Keypad entry of a valid one to six digit code activates one or both of the output relays which releases an electric door lock.

The SDC EntryCheck™ 923P adds HID proximity reader capability to the keypad. The 923PW is designed to interface with most access control systems and provides a standard 26-bit Wiegand output.



FEATURES

- Narrow Digital Keypad with or without Wiegand Output for Universal Compatibility
- Weather & Vandal Resistant Housing with Tactile Metal Keys
- HID-Compatible Proximity Reader (923P and 923PW only)
- 12-Key Illuminated, 2" x 6" Keypad
- Surface, Mullion, or Single-Gang Mount
- Built-In Tamper Switch
- Programmable Site Code (923PW)
- Dual LED Status Indicators
- Adjustable Audible Annunciation
- Configurable Illumination: On, Off, Timed

PROX ONLY:

3 User Modes:

- PIN or Card
 - Card Only
 - Card and PIN
- HID-Compatible: 125kHz-RFID)



MODELS


- 923** Standalone Digital Narrow Keypad
- 923P** Standalone Digital Narrow Keypad with Prox Reader
- 923PW** Digital Narrow Keypad with Prox Reader and Wiegand Output



PROGRAMMING OPTIONS

The 923 EntryCheck™ series includes a Door Sense/Inhibit Input feature. When programmed for “Door Sense”, a door position switch wired into the input and detects a “forced entry” or “door ajar” condition. When programmed for “Inhibit Input”, a maintained switch or automatic timer wired into the input will disable the activation

of the main relay. The EntryCheck™ also has a request-to-exit input for connection to an exit switch and/or fire access key switch for fire/emergency access. When access is granted, the shunt option is activated shunting alarm contacts on the door or gate. This prevents triggering of an alarm during authorized access.

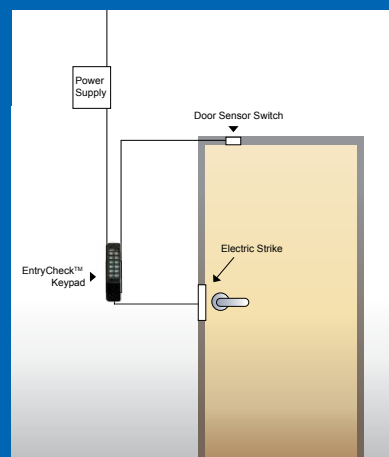

923 & 923P SPECIFICATIONS



Voltage	12/24 VAC/DC
Current	30mA Typical, 150mA Maximum
Outputs (923/923P)	Relay 1 - SPDT 5 Amps @ 30VDC Relay 2 - SPDT 2 Amps @ 30VDC Switch to Common Outputs 3 & 4 – 100mA @ 30VDC
Temperature	-20°F to + 130°F
Humidity	5% to 95% Non-Condensing
Finish	Powder Coat Painted Cast Metal
Mount	Surface Mount
Housing	1-3/4"W x 7-5/16"H x 1-3/8"D (1.5" Wall Projection)
Weight	1.65 lbs

923PW SPECIFICATIONS

Keypad Housing	Powder Coat Painted Cast Metal
Voltage	5-16VDC
Current	30mA Typical, 60mA Max.
Reader Output	26-bit Wiegand
Reader Frequency	125kHz
Keypad Output	26-bit Wiegand or 4-bit Word
Wiring	6" Pigtail
Temperature	-22°F to +149°F
Humidity	5% to 95% Non-Condensing
Dimensions	1-3/4"W x 7-5/16"H x 1-3/8"D (1.5" Wall Projection)
Weight	1.65 lbs

ACCESSORIES

PROX CARDS AND KEY FOBS

-  **HID1326-25** HID ProxCard® II, 25 Cards
- HID1326-100** HID ProxCard® II, 100 Cards
-  **HID1346-10** HID ProxKey® II, 10 Key Fobs
- HID1346-100** HID ProxKey® II, 100 Key Fobs



EntryCheck™ 921P & 924P

Digital Keypads x Secure Electronics



The SDC 921P and the 924P EntryCheck™ are indoor/outdoor stand-alone digital keypads with Prox Reader and Controller (2-piece configuration), designed to control access of a single entry point with up to 500 users. Each user is assigned a proximity card and/or a personal identification number (PIN). Presentation of a proximity card or keypad entry of a code activates one or both of the output relays which releases an electric door lock.

FEATURES

- Weather Resistant
- Heavy Cast Vandal Resistant Housing
- Heavy Cast Metal Blue Backlit Keys
- Keypad Programmable
- 500 Users, Prox card and/or PIN Codes
- 4 Outputs, 2 Relay and 2 Solid State Outputs Timed or Latching (On/Off)
- Assign Entry to Relays 1 and/or 2
- LED Status: Access, Lockout
- Tactile Keys with Selectable Audible Levels for Key Depression or Output Activation
- Timed Anti-Passback, Anti-Tailgate
- Keypad Tamper Lockout
- Request-to-Exit/Enter Input
- Choice of Door Sense/Relay Inhibit Input Functions; Forced Entry, Door Ajar, or Inhibit Relay 1 or 2, Auto Relock When Door Closes
- Choice of 2 Solid State Outputs Functions; Alarm Shunt, Forced Entry, Door Ajar, Tamper Lockout or Keypad Active

MODES:

3 User Modes:

- PIN or Card
- Card Only
- Card and PIN
HID-Compatible (125kHz-RFID)



MODELS



921P Standalone Surface Mount Digital Keypad with Prox Reader and Controller




924P Standalone Surface Mount Narrow Digital Keypad with Prox Reader and Controller



PROGRAMMING OPTIONS

The 921 and 924 EntryCheck™ series includes a Door Sense/Inhibit Input feature. When programmed for “Door Sense”, a door position switch wired into the input and detects a “forced entry” or “door ajar” condition. When programmed for “Inhibit Input”, a maintained switch or automatic timer wired into a the input will disable the activation of the

main relay. The EntryCheck™ also has a request-to-exit input for connection to an exit switch and/or fire access key switch for fire/emergency access. When access is granted, the shunt option is activated shunting alarm contacts on the door or gate. This prevents triggering of an alarm during authorized access.

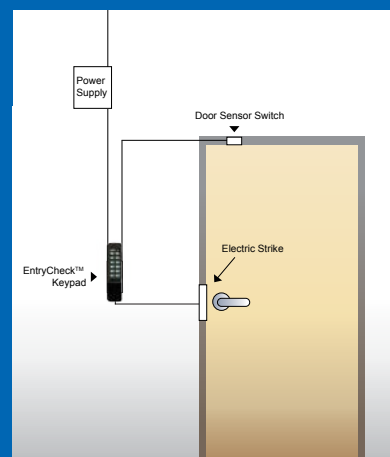

921P SPECIFICATIONS





Voltage	12/24 VAC/DC
Current	30mA Typical, 150mA Maximum
Outputs	Relay 1 - SPDT 5 Amps @ 30VDC Relay 2 - SPDT 2 Amps @ 30VDC Switch to Common Outputs 3 & 4 – 100mA @ 30VDC
Temperature	-22°F to + 149°F (-30°C to + 65°C)
Humidity	5% to 95% Non-Condensing
Finish	Powder Coat Painted Cast Metal
Keypad	3"W x 5-3/4"H x 1-7/16"D (1.5" Wall Projection) Surface mount
Enclosure	7-3/4" W x 5-3/4" H x 3-1/2" D
Weight	2.65 lb

924P SPECIFICATIONS


Voltage	12/24 VAC/DC
Current	30mA Typical, 150mA Maximum
Outputs	Relay 1 - SPDT 5 Amps @ 30VDC Relay 2 - SPDT 2 Amps @ 30VDC Switch to Common Outputs 3 & 4 – 100mA @ 30VDC
Temperature	-20°F to + 130°F (-30°C to + 65°C)
Humidity	5% to 95% Non-Condensing
Finish	Powder Coat Painted Cast Metal
Keypad	1-3/4"W x 7-5/16"H x 1-3/8"D (1.5" Wall Projection) Surface mount
Enclosure	7-3/4" W x 5-3/4" H x 3-1/2" D
Weight	2.45 lb

ACCESSORIES

PROX CARDS AND KEY FOBs

-  **HID1326-25** HID ProxCARD® II, 25 Cards 
- HID1326-100** HID ProxCARD® II, 100 Cards
-  **HID1346-10** HID ProxKey® II, 10 Key Fobs 
- HID1346-100** HID ProxKey® II, 100 Key Fobs

EntryCheck™ 925 Series Digital Keypads



The SDC EntryCheck™ 925 Series outdoor stand-alone digital keypads with Privacy Shroud are designed to control access of a single entry point for facilities with up to 500 users. Each user is assigned a personal identification number (PIN). Keypad entry of a valid one to six digit code activates one or both of the output relays which releases an electric door lock.


The SDC EntryCheck™ 925P adds HID proximity reader capability to the keypad. The 925PW is designed to interface with most access control systems and provides standard 26-bit Wiegand output. Perfect for Post-mount applications.

FEATURES

- Digital Keypad with or without Wiegand Output for Universal Compatibility
- Weather & Vandal Resistant Housing with Tactile Metal Keys
- HID-Compatible Proximity Reader (925P and 925PW only)
- 12-Key Illuminated, 3" x 4" Keypad
- Surface or Single-Gang Mount
- Built-In Tamper Switch
- Programmable Site Code (925PW)
- Dual LED Status Indicators
- Adjustable Audible Annunciation
- Configurable Illumination: On, Off, Timed

PROX ONLY:

- 3 User Modes:
- PIN or Card
 - Card Only
 - Card and PIN (HID-Compatible: 125kHz-RFID)


MODELS	
925	Indoor/Outdoor Keypad with Privacy Shroud
925P	Indoor/Outdoor Keypad with Privacy Shroud and Prox Reader
925PW	Indoor/Outdoor Keypad with Privacy Shroud and Prox Reader, Wiegand Output 



PROGRAMMING OPTIONS

The 925 EntryCheck™ series includes a Door Sense/Inhibit Input feature. When programmed for “Door Sense”, a door position switch wired into the input and detects a “forced entry” or “door ajar” condition. When programmed for “Inhibit Input”, a maintained switch or automatic timer wired into the input will disable the activation

of the main relay. The EntryCheck™ also has a request-to-exit input for connection to an exit switch and/or fire access key switch for fire/emergency access. When access is granted, the shunt option is activated shunting alarm contacts on the door or gate. This prevents triggering of an alarm during authorized access.

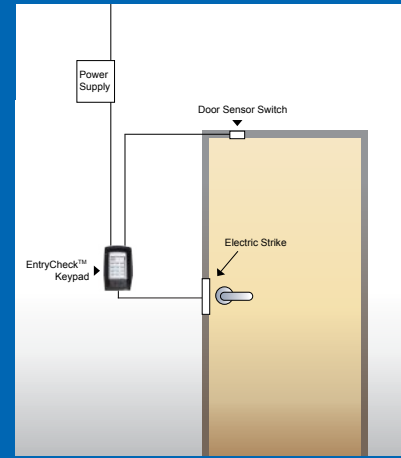

925 & 925P SPECIFICATIONS

Voltage	12/24 VAC/DC
Current	30mA typical, 150mA maximum
Outputs	Relay 1 - SPDT 5 Amps @ 30VDC Relay 2 - SPDT 2 Amps @ 30VDC Switch to Common Outputs 3 & 4 – 100mA @ 30VDC
Temperature	-22°F to + 149°F (-30°C to + 65°C)
Humidity	5% to 95% non-condensing
Finish	Powder Coat Painted Cast Metal
Weight	2.54 lbs

925PW SPECIFICATIONS

Keypad Housing	Powder Coat Painted Cast Metal
Voltage	5-16VDC
Current	30mA Typical, 60mA Max.
Reader Output	26-bit Wiegand
Reader Frequency	125kHz
Keypad Output	26-bit Wiegand or 4-bit Word
Wiring	6" Pigtail
Temperature	-22°F to +149°F
Humidity	5% to 95% Non-Condensing
Finish	Powder Coat Painted Cast Metal
Weight	2.54 lbs

ACCESSORIES

PROX CARDS AND KEY FOBS

-  **HID1326-25** HID ProxCard® II, 25 Cards
-  **HID1326-100** HID ProxCard® II, 100 Cards
-  **HID1346-10** HID ProxKey® II, 10 Key Fobs
-  **HID1346-100** HID ProxKey® II, 100 Key Fobs



EntryCheck® E75

Standalone Electronic Locksets

The SDC EntryCheck® E75 is an indoor/outdoor standalone electronic battery powered solution, providing controlled access for basic and multi-level high security requirements. The E75PS locksets are keypad or PC software programmable, and combine multiple access technology with efficient motorized locksets.



FEATURES

E75K and E75P:

- Keypad or PC Software Programmable
- 3,000 Users, 32 Temporary Users
- 4 to 6 Digit PIN Codes
- 3 Passage Mode Option
- 32 Access Groups, Schedules
- 32 Holidays
- 4 Authority Levels
- Keypad Tamper Lockout
- Mechanical Key Override
- Battery Powered (4AA)
- Blue Backlit Cast Metal Keys
- Weather & Vandal Resistant
- Retrofit Existing Lock Door Prep
- Motorized SDC Cylindrical Lockset
- Heavy Duty ANSI Grade 1
- Vandal Resistant Lever Clutch Mechanism

E75PS additional Features :

- Point-and-Click Microsoft PC-Based Software
- Supports Up to 1,000 Unique Doors
- Manage Individual Door Parameters, Access Schedules, User Groups, Holidays, Temporary Users
- Lock settings and related parameters are easily cloned to other locks, permitting quick multi-lock installations
- Data Import: All lock parameters and user data can easily be imported from existing databases, locks, or spreadsheets
- Database Backup Utility: Password protected SQL dbase may be saved on any PC
- Wireless Information Transfer: Lock programming and audit trail may be uploaded or downloaded using a Bluetooth enabled PC or laptop
- Audit Trail Information: Locks will maintain a record of the last 10,000 events to provide increased accountability. Audits may be downloaded to Excel spreadsheets where information is easily analyzed, sorted or printed
- User Entries Logged with Time and Date
- Remote Input Activation is Logged
- Door Forced/Door Ajar/Duress Alarms Are Logged
- User Reports: Users may be exported to Excel spreadsheets where information is easily sorted or printed

E75PS
Includes Bluetooth enabled software!



SPECIFICATIONS

Power	4 Size AA Batteries (Alkaline) 100,000 cycles or External 12VDC Power @ 30mA
Inputs	1 Request to Exit 1 Door Position Switch
Output	1 Aux Relay Contacts SPDT 1A @ 30VDC
Temperature	22°F to + 130°F (-30°C to + 54°C)
Humidity	5% to 95% non-condensing
Keypad Finish	Q 626 Dull Chrome - Standard B 693 Black
Latch Bolt	9/16" Throw
Backset	2-3/4"
Strike	4-7/8" ANSI A115.2
Door Thickness	1-3/4" to 2-1/8"
Weight	8.8 lbs


PC Requirements

Supported Operating Systems	Windows 7/8, 10 (32-Bit and 64-Bit Systems)
Processor	2GHz or Faster Recommended
RAM	2GB or More Recommended
Hard Disk Space	1GB or More Recommended
Required	Windows Administrative Rights

ACCESSORIES

PROX CARDS AND KEY FOBS

	HID1326-25	HID ProxCard® II, 25 Cards	
	HID1326-100	HID ProxCard® II, 100 Cards	
	HID1346-10	HID ProxKey® II, 10 Key Fobs	
	HID1346-100	HID ProxKey® II, 100 Key Fobs	






When locked, the built-in clutch permits the handles to operate without retracting the latch, reducing potential for damage.

PRODUCT SKU SAMPLE: E75P Q E1 Q


HOW TO ORDER

ENTRYCHECK™ E75 LOCKSET - SDC LOCK



1| SPECIFY MODEL

-  **E75K** Digital Keypad Only
-  **E75P** Digital Keypad with Prox Reader
-  **E75PS** Digital Keypad with Prox Reader and Software

2| SPECIFY KEYPAD FINISH

-  **Q** 626 Dull Chrome (Standard)
- B** Black

3| SPECIFY LEVER HANDLE

-  **G1** Galaxy
- G5** Galaxy I-Core Prep
-  **E1** Eclipse
- E5** Eclipse I-Core Prep



G1 Galaxy



E1 Eclipse



G5 Galaxy, I-Core



E5 Eclipse, I-Core

4| SPECIFY LEVER FINISH

- Q** 626 Dull Chrome (Standard)
- P** 625 Polished Chrome
- C** 605 Polished Brass

EntryCheck® E76

Standalone Electronic Mortise Locksets



The EntryCheck® E76 Series includes an SDC Mortise lock and is an indoor/outdoor standalone electronic battery powered solution, providing controlled access for basic and multi-level high security requirements. The E76 locksets are keypad or PC software programmable, and combine multiple access technology with efficient motorized locksets.

FEATURES

E76K and E76P:

- Keypad or PC Software Programmable
- 3,000 Users, 32 Temporary Users
- 4 to 6 Digit PIN Codes
- 3 Passage Mode Option
- 32 Access Groups, Schedules
- 32 Holidays
- 4 Authority Levels
- Keypad Tamper Lockout
- Mechanical Key Override
- Battery Powered (4AA)
- Blue Backlit Cast Metal Keys
- Weather & Vandal Resistant
- Retrofit Existing Lock Door Prep
- Motorized SDC Mortise Lockset
- Heavy Duty ANSI Grade 1
- Vandal Resistant Lever Clutch Mechanism

E76PS additional Features :

- Point-and-Click Microsoft PC-Based Software
- Supports Up to 1,000 Unique Doors
- Manage Individual Door Parameters, Access Schedules, User Groups, Holidays, Temporary Users
- Lock settings and related parameters are easily cloned to other locks, permitting quick multi-lock installations
- Data Import: All lock parameters and user data can easily be imported from existing databases, locks, or spreadsheets
- Database Backup Utility: Password protected SQL dbase may be saved on any PC
- Wireless Information Transfer: Lock programming and audit trail may be uploaded or downloaded using a Bluetooth enabled PC or laptop
- Audit Trail Information: Locks will maintain a record of the last 10,000 events to provide increased accountability. Audits may be downloaded to Excel spreadsheets where information is easily analyzed, sorted or printed
- User Entries Logged with Time and Date
- Remote Input Activation is Logged
- Door Forced/Door Ajar/Duress Alarms Are Logged
- User Reports: Users may be exported to Excel spreadsheets where information is easily sorted or printed

E76PS
Includes Bluetooth enabled software!



MORTISE LOCK FEATURES

- SDC Fully Featured Mortise Lockset with Complete Application Flexibility for New Construction or Retrofit of Major Brand Mechanical Locks
- New or Retrofit Application, Replaces Most Mechanical Locks
- Order with SDC Trim or Less Trim. Compatible with Schlage Trim Provided by Others.
- Key Latch Retraction
- ANSI Grade 1

KEYPAD SPECIFICATIONS

Power	4 Size AA Batteries (Alkaline) 100,000 cycles or External 12VDC Power @ 30mA
Inputs	1 Request to Exit 1 Door Position Switch
Output	1 Aux Relay Contacts SPDT 1A @ 30VDC
Temperature	22°F to + 130°F (-30°C to + 54°C)
Humidity	5% to 95% non-condensing
Keypad Finish	Q 626 Dull Chrome - Standard B 693 Black
Latch Bolt	9/16" Throw
Backset	2-3/4"
Strike	4-7/8" ANSI A115.2
Door Thickness	1-3/4" to 2-1/8"
Weight	8.8 lbs

PC Requirements

Supported Operating Systems	Windows 7/8, 10 (32-Bit and 64-Bit Systems)
Processor	2GHz or Faster Recommended
RAM	2GB or More Recommended
Hard Disk Space	1GB or More Recommended
Required	Windows Administrative Rights

PRODUCT SKU SAMPLE: E76P Q RR EE Q

HOW TO ORDER

ENTRYCHECK™ E76 SERIES

1| SPECIFY MODEL

- E76K** Digital Keypad Only, with Mortise Lock
- E76P** Digital Keypad with Prox Reader, with Mortise Lock
- E76PS** Digital Keypad with Prox Reader and Software, with Mortise Lock

2| SPECIFY KEYPAD FINISH

- Q** 626 Dull Chrome (Standard)
- B** Black

3| SPECIFY HAND

- L** Left Hand
- R** Right Hand
- RR** Right Hand Reversed
- LR** Left Hand Reversed

4| SPECIFY LOCK LEVER TRIM





5| SPECIFY LOCK FINISH

- Q** 626 Dull Chrome (Standard)
- C** 605 Polished Brass
- P** 625 Bright Chrome

ACCESSORIES

PROX CARDS AND KEY FOBs

-  **HID1326-25** HID ProxCard® II, 25 Cards
- HID1326-100** HID ProxCard® II, 100 Cards
-  **HID1346-10** HID ProxKey® II, 10 Key Fobs
- HID1346-100** HID ProxKey® II, 100 Key Fobs



EntryCheck® E77

Standalone Electronic Exit Device



The EntryCheck® E77 Series include an SDC rim exit device and trim. The E77 lockset are an indoor/outdoor standalone electronic battery powered solution, providing controlled access for basic and multi-level high security requirements. The E77 locksets are keypad or PC software programmable, and combine multiple access technology with efficient motorized exit devices.

FEATURES

E77K and E77P:

- Keypad or PC Software Programmable
- 3,000 Users, 32 Temporary Users
- 4 to 6 Digit PIN Codes
- 3 Passage Mode Option
- 32 Access Groups, Schedules
- 32 Holidays
- 4 Authority Levels
- Keypad Tamper Lockout
- Mechanical Key Override
- Battery Powered (4AA)
- Blue Backlit Cast Metal Keys
- Weather & Vandal Resistant
- Retrofit Existing Lock Door Prep
- SDC S6100 Rim Exit Device
- Heavy Duty ANSI Grade 1

E77PS additional Features :

- Point-and-Click Microsoft PC-Based Software
- Supports Up to 1,000 Unique Doors
- Manage Individual Door Parameters, Access Schedules, User Groups, Holidays, Temporary Users
- Lock settings and related parameters are easily cloned to other locks, permitting quick multi-lock installations
- Data Import: All lock parameters and user data can easily be imported from existing databases, locks, or spreadsheets
- Database Backup Utility: Password protected SQL dbase may be saved on any PC
- Wireless Information Transfer: Lock programming and audit trail may be uploaded or downloaded using a Bluetooth enabled PC or laptop
- Audit Trail Information: Locks will maintain a record of the last 10,000 events to provide increased accountability. Audits may be downloaded to Excel spreadsheets where information is easily analyzed, sorted or printed
- User Entries Logged with Time and Date
- Remote Input Activation is Logged
- Door Forced/Door Ajar/Duress Alarms Are Logged
- User Reports: Users may be exported to Excel spreadsheets where information is easily sorted or printed

E77PS

Includes Bluetooth enabled software!





EXIT DEVICE FEATURES

- The SDC S6000 Spectra™ series panic and fire rated exit devices are UL listed and ANSI A156.3 Grade 1 compliant and comply with all national and state building and fire life safety codes. The SDC Spectra series exit devices has a modern look and quiet push pad operation.



EXIT DEVICE SPECIFICATIONS

Device Head Cover	Zinc Alloy or Stainless Steel
Chassis	Steel, Plated
Housing	Extruded Aluminum
Push Bar Base	Extruded Aluminum
Touch Plate	Stainless Steel
Mounting	Machine screws standard. Sex bolts optional. Order "SNB" for wood or non-reinforced metal doors
End Cap	Zinc Alloy
Hand	Non-Handed
Dogging	Allen-Type Key Furnished
Finish	630 Stainless Steel



KEYPAD SPECIFICATIONS

Power	4 Size AA Batteries (Alkaline) 100,000 cycles or External 12VDC Power @ 30mA
Inputs	1 Request to Exit 1 Door Position Switch
Output	1 Aux Relay Contacts SPDT 1A @ 30VDC
Temperature	22°F to + 130°F (-30°C to + 54°C)
Humidity	5% to 95% non-condensing
Latch Bolt	9/16" Throw
Backset	2-3/4"
Strike	4-7/8" ANSI A115.2
Door Thickness	1-3/4" to 2-1/8"
Weight	8.8 lbs

PC Requirements

Supported Operating Systems	Windows 7/8, 10 (32-Bit and 64-Bit Systems)
Processor	2GHz or Faster Recommended
RAM	2GB or More Recommended
Hard Disk Space	1GB or More Recommended
Required	Windows Administrative Rights

PRODUCT SKU SAMPLE: E77P Q EK M61 P U 36



HOW TO ORDER

ENTRYCHECK™ E77 SERIES

1| SPECIFY MODEL

- E77K** Digital Keypad Only, with SDC S6100 Exit Device
- E77P** Digital Keypad with Prox Reader, with SDC S6100 Exit Device
- E77PS** Digital Keypad with Prox Reader and Software, with SDC S6100 Exit Device

2| SPECIFY KEYPAD FINISH

- Q** 626 Dull Chrome (Standard)
- B** Black

3| SPECIFY ELECTRIC TRIM

- EK** Eclipse Style Electric Trim Less Mortise Cylinder, Stainless Steel Finish
- GK** Galaxy Style Electric Trim Less Mortise Cylinder, Stainless Steel Finish



EKM Eclipse,
Less Cylinder



GKM Galaxy
Less Cylinder

4| SPECIFY SPECTRA SERIES EXIT DEVICE

M61 Rim Mount Exit Device



5| SPECIFY PANIC OR FIRE RATED

- P** Panic Exit Device
Mechanical Dogging STD. See Part # CD for
Optional Key Cylinder Dogging
- F** Fire Exit Device
Mechanical Dogging Not Available

6| SPECIFY EXIT DEVICE FINISH

- U** 630 Dull Stainless Steel

7| SPECIFY EXIT DEVICE LENGTH

- 36** For 36" Door N/C
- 42** For 42" Door
- 48** For 48" Door



ACCESS CONTROL ACCESSORIES

HID Prox Cards and Fobs

The **ProxCARD**® proximity access control card is the industry choice for a cost-effective solution to proximity access control, with universal compatibility with all HID proximity card readers. The ProxCARD® proximity access control card provides durable packaging and consistent read range.



The **ProxKey**® is a proximity card keyfob for access control offering HID proximity technology in a convenient, pocket size device. The proximity card keyfob easily attaches to a key ring, badge clip or lanyard. The ProxKey® is built to withstand harsh operating environments or handling.



MODELS

- HID1326-25** HID ProxCARD® II, 25 Cards
- HID1326-100** HID ProxCARD® II, 100 Cards

MODELS

- HID1346-10** HID ProxKey® II, 10 Key Fobs
- HID1346-100** HID ProxKey® II, 100 Key Fobs




DPS-11
Ball Switch

Compatible with swinging or sliding doors. Recommended uses include communicated doors, mantraps, auto re-lock switches and high current applications. (2-3/4" x 1-1/4")



MC-4PAK
Magnetic Switch

Ideal for door status monitoring, the SDC MC-4 is easily installed in hollow metal and aluminum doors and frames (3/4" Diameter). **Comes in Pack of 10.**

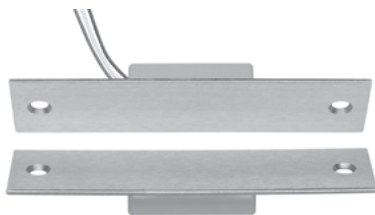

MC-4M
Concealed Magnetic Contact

Designed for vandal resistance, the SDC MC-4M is installed in the mortise of a hollow metal or aluminum frame and wood, hollow metal or aluminum door. (4-7/8" x 1-1/4")




MC-7
High Security Magnetic Switch

Biased for high security door status monitoring, the SDC MC-7 guards against false status indication caused by the presence of an additional magnet. Installed in hollow metal and aluminum doors and frames. Recommended for high security applications. (1" Diameter)

See Accessories Category [pages 288 on] for Spec's



SDC Door Check List



JOB NAME: _____

DOOR IDENTIFICATION: (EXTERIOR _____ (INTERIOR) _____)

DOOR LOCATION OR NUMBER _____

SINGLE DOOR HANDING: RH ___ LH ___ RHR ___ LHR ___

DOUBLE DOORS HANDING: RH ___ LH ___ RHR ___ LHR ___

TYPE OF DOOR: HOLLOW METAL ___ : ALUMINUM & GLASS ___ : HERCULITE (TOP & BOTTOM RAILS) ___
 HERCULITE (BOTTOM RAIL ONLY) ___ : HERCULITE (PIVOT & LOCK PATCH FITTINGS) _____

DOES DOOR HAVE AN "EXIT" SIGN ABOVE IT ___ YES ___ NO

DOOR SIZE: W _____ X H _____ + DOOR THICKNESS _____ + LOCK HEIGHT _____ + LOCK BACKSET _____

HINGE TYPE _____ + **HINGE SIZE** _____ + **HINGE FINISH** _____

EXISTING LOCK TYPE & BRAND _____ + **FINISH** _____

DOOR CLOSER: SURFACE MOUNT: INSIDE ___ OR OUTSIDE ___ : CLOSER MANUFACTURE _____

DOOR CLOSER: IN THE HEADER ___ : HOLD OPEN FEATURE YES ___ NO ___ : DEGREE OF OPENING _____

AUTOMATIC DOOR OPERATOR: MANUFACTURE & MODEL# _____

AUTOMATIC DOOR OPERATOR PUSH PLATE SWITCHES: HARD WIRED _____ OR WIRELESS _____

WHAT KIND OF CEILING _____ (PLASTER, DRYWALL, LIFT OUT, PANELS OR PUZZLE)

HOW HIGH IS THE CEILING _____

WHAT KIND OF HEADER _____ (NONE, WOOD, STEEL, ALUMINUM, GLASS)

WHAT TYPE OF TRAFFIC: LIGHT ___ MEDIUM ___ HEAVY ___



PICTURES TAKEN OF DOOR: YES ___ OR NO ___

MEASUREMENT FROM DOOR TO ACCESS CONTROLLERS: _____

MEASUREMENT FROM DOOR TO POWER SUPPLY: _____

WIRE GAGE _____ : **WIRE TYPE** _____ : **AMOUNT OF WIRES** _____ : **EXTRA WIRES** _____

VOLTAGE AT DOOR: _____ : **VOLTAGE AT POWER SUPPLY** _____ : **CURRENT AT DOOR** _____

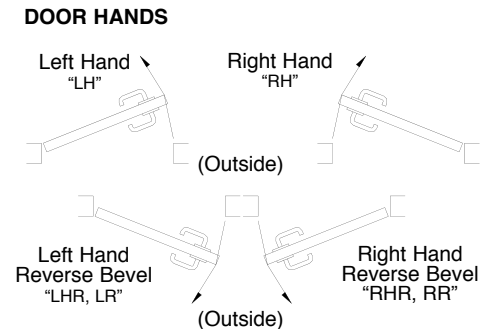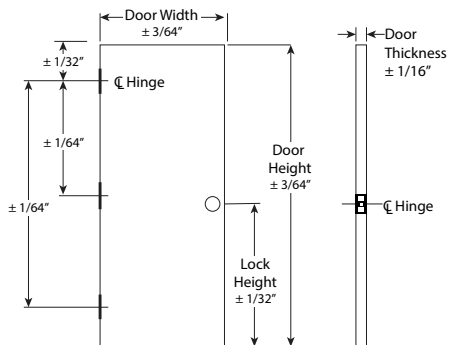

INDEX

Item Code	Page #	Item Code	Page #	Item Code	Page #
110	133	1562SC / 1562SCHDB	26	45-4 / 45-6 / 45-7	69
210	133	1565 / 1566	26	451 / 452 / 453P	187
260	133	1571DE	51	45A	69
280	133	1572 / 1573	10	463 / 474	189
295	143	1575DEU	51	491 / 492	591
918	153	1575U	29	510 thru 590	177
921	159	1576-MP	29	55 A thru F	67
923	157	1576-ZB	29	55-ABC	67
924	159	1576AB / 1576-BK	29	602RF	239
1511	39	1576DEU	51	621P	249
1561	26	1576U	29	631RF / 632RF /	
1562	26	1581 / 1582	10	634RF / 636RF	241
1571	10	1581-DF	10	7000-DB1/4	78
101-1A	283	1581DE	10	7000-DB3/8	78
101-1AK / 101-4AM	283	1581S	47	7000-DGK	78
101-DE / 101-KDE	51	1583V	10	701 thru 713	193
101-PAM	283	1591U	37	702R / 708R	193
1091A	123	180A	135	7250 / 7252 D, H, P, S, T	79
10TD	294	2090A	129	7500EB	90
1190A	129	2490A	131	7550 A thru V	91
1291A	123	25-4U	61	7850 / 7852 A thru X	83
12VR	260	290 / 290LS	141	801AL thru 813AL	193
14-2	294	30-4	63	920/921	155
1490A	131	350V / 352V	19	AB Angle Brackets	15
15-1	273	400U-L2	279	ACM-1	258
15-2 / 15-3	273	400U-RMB / 400U-SN	281	AL4 / AL8	271
15-4	59	412 / 413 / 422 /		APB1000A	297
1511-DF	10	423 / 424 / 425	179	AR11Y	14
1511DE	10	413MN / 423M	181	BBID	195
1511S	39	431 / 432 / 433 /		BL4 / BL8	271
1511T	39	434 / 435	183	BPS6S / BPG6S	213
1512 / 1513	10	441 / 442 / 443 /		BR64	265
1561S / 1561TJ	26	444 / 446	185	CB401-AU / CB401-B	225

INDEX continued

Item Code	Page #	Item Code	Page #	Item Code	Page #
CB701	225	MC-7	296	Z7550	87
CC1-5 / CC3-5	82	MD-31	293	ZA7850	81
CL4 / CL8	271	MS-12 / MS-14 /		ZD7250	80
CR4	257	MS-16 / MS-20	72	ZR7550	87
DBM	68	MSB550	173	ZS7250	80
DC-1	12	PB-16 / PB-8	258	ZT7550	91
DL4 / DL8	271	PD2090A	137	ZT7850	83
DPS-11	295	PSB560	171	ZY7550	87
DTMA / DTMO	269	PT-2U	235		
E1200 / E600 / E6200	21	PT-3V	235		
E300	33	PT-5	233		
E75 / E76 / E77	163	PTH	229		
EA100	277	PTM	231		
EH10 / EH20 / EH30 /		RB12V4 / RB12V7	261		
EH40 / EH42	287	RCC	271		
EKE03	96	S6100 / S6200 / S6300	95		
EMC	259	S6100-101	99		
EP17624 / EP17624TJ	35	S6303FH	105		
EZ-A / EZ-B / EZ-D /		SC-10	106		
EZ-T	11	SK-82 / SK-88	85		
FB-4	257	SK-L90	85		
FP Filler Plates/		TCC	271		
AB Angle Brackets	14	TJ1 / TJ2	12		
FS23M	127	TJ2440	264		
GKE03	96	TJ81 / TJ82	12		
GL160A / GL260A	139	TP1220 / TP2440	264		
HID1326-25	169	TR-12 / TR-24	263		
IP100	119	UB11 / UB12	13		
IPPRO	147	UF11 / UF12	13		
IPRW	151	UF81 / UF82	13		
LR100	113	UR-1 / UR2-4 / UR4-8	253		
MC-4	296	Z7250 / Z7252	75		

Icon Index



Made in the USA



UL Listed



Grade 1



CE Listed



Weather Resistant



Available through
shipQUICK Inventory



Lifetime Warranty



3 Year Warranty



5 Year Warranty



Field Selectable



ADA Compliant



Power over Ethernet
Capable Locking Hardware

NOTES

SDC

Security Door Controls

PUSH UNTIL ALARM SOUNDS. DOOR CAN BE OPENED IN 15 SECONDS.

