shipQUICK INVENTORY PROGRAM



Waiting Sucks!

the lock behind the system






Security Dealers, Integrators, Installers & Distributors

300+ SDC products are available for shipment within two business day. Keep your copy of the shipQUICK inventory readily available so you know firsthand which products your SDC distributor can expedite for you.



www.sdcsecurity.com/shipquick

Check the SDC website periodically to download revised inventory lists, product datasheets and more.

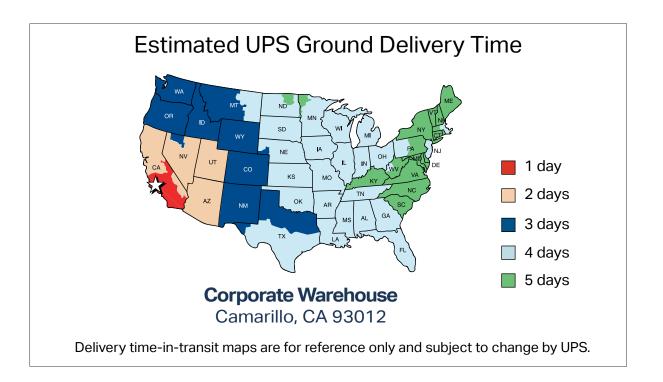

shipQUICK Program Policy

- Available to SDC Direct Accounts
- Contact SDC sales department or your local SDC sales representative for participating qualifications
- Maximum quantity 10 allowed per product for most items
- Qualifying orders will ship within two business days
- shipQUICK orders are non-cancellable

- Availability limited to shipQUICK inventory on hand
- No backorders; all items on multiple product orders must ship from shipQUICK inventory
- Freight paid by customer
- Standard SDC payment terms apply

| ELECTROMA | GNETIC LOCKS | Weight (lbs) |
|-----------|---|--------------|
| 1511V | Single EMLock, 1650lbs, 628 | 11.0 |
| 1511VD | Single EMLock, 1650lbs, 628, DPS | 11.0 |
| 1511X | Single EMLock, 1650lbs, 710 | 11.0 |
| 1512V | Double EMLock, 1650lbs, 628 | 27.0 |
| 1571V | Single EMLock, 1200lbs, 628 | 11.0 |
| 1571VD | Single EMLock, 1200lbs, 628, DPS | 11.0 |
| 1571X | Single EMLock, 1200lbs, 710 | 11.0 |
| 1572V | Double EMLock, 1200lbs, 628 | 27.0 |
| 1575U | Single Gate Lock, 1200lbs, 630 | 11.0 |
| 1576U | Single Gate Lock, Face Drilled, 1200lbs, 630 | 10.0 |
| 1581V | Single EMLock, 650lbs, 628 | 5.0 |
| 1581VD | Single EMLock, 650lbs, 628, DPS | 5.0 |
| 1581X | Single EMLock, 650lbs, 710 | 5.0 |
| 1582V | Double EMLock, 650lbs, 628 | 8.0 |
| E6200 | Single Industrial Lock, 1200lbs, 630 | 12.0 |
| E1200 | Single Excel Lock, 1200lbs, 628 | 10.0 |
| E600 | Single Excel Lock, 600lbs, 628 | 7.0 |
| 350V | Single Narrow Lock, 1200lbs, 628 | 10.0 |
| 352V | Double Narrow Lock, 1200lbs, 628 | 19.0 |
| 1591U | Single Sliding Door Lock, 850lbs, 630 | 5.0 |
| E300 | Single Micro Cabinet Lock, 300lbs, 628 | 5.0 |
| EP17624 | Hazardous Electromagnetic Lock, 600lbs, 628, DPS | 7.0 |
| EP17624TJ | Hazardous Electromagnetic Lock with Top Jamb Mounting Kit, 600lbs, 628, DPS | 10.0 |
| TJ1V | Top Jamb Mounting Kit, 628 (1511, 1571) | 5.0 |
| TJ2V | Top Jamb Mounting Kit, 628 (1512, 1572) | 9.0 |
| TJ81V | Top Jamb Mounting Kit, 628 (1581) | 6.0 |
| TJ82V | Top Jamb Mounting Kit, 628 (1582) | 6.0 |
| TJ62V | Top Jamb Mounting Kit, 628 (E6200) | 4.0 |
| E12Z | Top Jamb Mounting Kit, 628 (E1200) | 3.0 |
| E6Z | Top Jamb Mounting Kit, 628 (E600) | 3.0 |
| TJ350V | Top Jamb Mounting Kit, 628 (350) | 5.0 |
| TJ352V | Top Jamb Mounting Kit, 628 (352) | 9.0 |
| UF11V | Spacer Bracket, 628 (1511, 1571) | 1.0 |
| UB11V | Header Bracket, 628 (1511, 1571) | 1.0 |
| HDB1V | Glass Door Mounting Kit, 628 (1511, 1571, 1581) | 3.0 |
| HDB2V | Glass Door Mounting Kit, 628 (1512, 1572, 1582) | 6.0 |
| HDB352V | Glass Door Mounting Kit, 628 (352) | 6.0 |
| | 2 | |

3





1512



E6200



E1200



EP17624





| ELECTROMAGN | ETIC LOCKS (continued) | Weight (lbs) |
|-------------|--|--------------|
| E12U | Glass Door Mounting Kit, 628 (E1200) | 3.0 |
| E6U | Glass Door Mounting Kit, 628 (E600) | 3.0 |
| AB03V | Angle Bracket, 11⁄2" x 11⁄2" x 83⁄4", 628 (1581) | 1.0 |
| AB04V | Angle Bracket, 2" x 11⁄2" x 8¾", 628 (1581) | 1.0 |
| AB13V | Angle Bracket, 11⁄2" x 11⁄2" x 11″, 628 (1511, 1571) | 2.0 |
| AB14V | Angle Bracket, 2" x 11½" x 11", 628 (1511, 1571) | 2.0 |
| AB23V | Angle Bracket, 11⁄2" x 11⁄2" x 22", 628 (1512, 1572) | 2.0 |
| AB24V | Angle Bracket, 2" x 11⁄2" x 22", 628 (1512, 1572) | 3.0 |
| AB32V | Angle Bracket, 11⁄2" x 11⁄2" x 171⁄2", 628 (1582) | 2.0 |
| AB33V | Angle Bracket, 2" x 11½" x 17½", 628 (1582) | 2.0 |
| FP04V | Filler Plate, ½" x 1¼" x 8¾", 628 (1581) | 1.0 |
| FP05V | Filler Plate, %" x 1¼" x 8¾", 628 (1581) | 1.0 |
| FP11V | Filler Plate, 1/8" x 11/4" x 11", 628 (1511, 1571) | 1.0 |
| FP12V | Filler Plate, ¼" x 1¼" x 11", 628 (1511, 1571) | 1.0 |
| FP14V | Filler Plate, ½" x 1¼" x 11", 628 (1511, 1571) | 1.0 |
| FP15V | Filler Plate, %" x 1¼" x 11", 628 (1511, 1571) | 2.0 |
| FP24V | Filler Plate, ½" x 1¼" x 22", 628 (1512, 1572) | 2.0 |
| FP25V | Filler Plate, ‰" x 1¼" x 22", 628 (1512, 1572) | 3.0 |
| FP33V | Filler Plate, ½" x 1¼" x 17½", 628 (1582) | 2.0 |
| FP34V | Filler Plate, %" x 1¼" x 17½", 628 (1582) | 2.0 |
| 1576-ZBV | Z Bracket, 628 (1576) | 4.0 |
| 1576-MP | Armature Mounting Plate, 628 (1576) | 1.0 |
| AMP | Armature Mounting Plate, 628 (1591) | 1.0 |
| EZ-D-10 | Door Position Status (DPS) Retrofit Kit (1511, 1512, 1571, 1572) | 1.0 |
| PCB112B01-A | Replacement EMLock Board (1511, 1512, 1571, 1572) | 1.0 |



FP

| ELECTROMAGNETIC SHEAR LOCKS | | Weight (lbs) |
|-----------------------------|---|--------------|
| 1561ITC | Concealed, 2000lbs, 628, Inverted Top Channel | 5.0 |
| 1562ITC | Concealed, External Electronics, 2000lbs, 628, Inverted Top Channel | 5.0 |
| 1565ITC | Concealed, 2700lbs, 628, Inverted Top Channel | 7.0 |



1561ITC

| DELAYED EGR | RESS LOCKS | Weight (lbs) |
|-------------|--|--------------|
| 1511SBDKV | Single Delayed Egress EMLock, 1650lbs, BD Operation, Key Control, 628 | 13.0 |
| 1511SNAKV | Single Delayed Egress EMLock, 1650lbs, NA Operation, Key Control, 628 | 14.0 |
| 1511SNAKVD | Single Delayed Egress EMLock, 1650lbs, NA Operation, Key Control, 628, DPS | 14.0 |
| 1511SNCKV | Single Delayed Egress EMLock, 1650lbs, NC Operation, Key Control, 628 | 14.0 |
| 1511SNDKV | Single Delayed Egress EMLock, 1650lbs, ND Operation, Key Control, 628 | 14.0 |
| 1511TNAKV | Tandem Delayed Egress EMLock, 1650lbs, NA Operation, Key Control, 628 | 25.0 |
| 1511TNDKV | Tandem Delayed Egress EMLock, 1650lbs, ND Operation, Key Control, 628 | 25.0 |
| 581SBDV | Single Delayed Egress EMLock, 650lbs, BD Operation, 628 | 7.0 |
| 581SNDV | Single Delayed Egress EMLock, 650lbs, ND Operation, 628 | 7.0 |
| 581SNDVD | Single Delayed Egress EMLock, 650lbs, ND Operation, 628, DPS | 7.0 |
| 581S-TC3 | Cable Kit, Frame Header Connection (1581S) | 1.0 |
| 01-DENA | Keypad Controller, NA Operation | 2.0 |
| 101-KDENA | Keypad & Key Switch Controller, NA Operation | 2.0 |
| 1511DEV | Single Delayed Egress EMLock, Controller Dependent, 1650lbs | 11.0 |
| 1581DEV | Single Delayed Egress EMLock, Controller Dependent, 650lbs | 7.0 |

| | 1511S | |
|--------|--|---|
| SOUNDS | UNTIL ALARM . Door can be in 15 seconds. | |
| | •• | 7 |
| | 1581S | |
| 0 | | |



DENA 1DEV

| ELECTRIC STR | IKES | Weight (lbs) |
|--------------|--|--------------|
| 15-4S24U | Value, Cylindrical, Failsecure, 24VDC, 630 | 2.0 |
| 15-4S12U | Value, Cylindrical, Failsecure, 12VDC, 630 | 2.0 |
| 25-4U | Value, 5/8" Latchbolt, 630, LLS | 2.0 |
| 30-4-24U | Rim Mount Exit Device, Failsecure, 24VDC, 630 | 4.0 |
| 45-A | Centerline, Faceplate Kit, 630/628, LLS | 2.0 |
| 45-4SU | Centerline, Square Corner, 630, LLS | 2.0 |
| 45F-4SU | Centerline, Fire-Rated, Square Corner, 630, LLS | 2.0 |
| 55-ABCU | Heavy Duty, Faceplate Kit, 630 | 2.0 |
| 55-AU | Heavy Duty, Cylindrical, 630 | 3.0 |
| 55-BU | Heavy Duty, Mortise, Deadlatch Below, 630 | 3.0 |
| 55-CU | Heavy Duty, Mortise, Deadlatch Above, 630 | 3.0 |
| 55-DU | Heavy Duty, Mortise, Deadlatch Below, Deadbolt, 630 | 3.0 |
| 55-EU | Heavy Duty, Mortise, Deadbolt, 630 | 3.0 |
| 55-FU | Heavy Dutyl, Mortise, Deadlatch Above, Deadbolt, 630 | 3.0 |





| Z75BLCQReplacement HiTower Controller, LH, 24VDC, 626 (SDC Brand & Schlage L9080)Z75BRCQReplacement HiTower Controller, RH, 24VDC, 626 (SDC Brand & Schlage L9080)Z7652LQEMotorized ELR Control, Mortise, Locked Outside Only, Failsecure, LH, 626, EclipseZ7652RQEMotorized ELR Control, Mortise, Locked Outside Only, Failsecure, RH, 626, EclipseZ7850LQESolenoid Control, Mortise, Locked Outside Only, Failsecure, RH, 626, Eclipse | (lbs) |
|--|-------|
| Z7652LQEMotorized ELR Control, Mortise, Locked Outside Only, Failsecure, LH, 626, EclipseZ7652RQEMotorized ELR Control, Mortise, Locked Outside Only, Failsecure, RH, 626, Eclipse | 2.0 |
| Z7652RQE Motorized ELR Control, Mortise, Locked Outside Only, Failsecure, RH, 626, Eclipse | 2.0 |
| | 6.0 |
| Z7850LQE Solenoid Control, Mortise, Locked Outside Only, Failsafe, LH, 626, Eclipse | 6.0 |
| | 7.0 |
| Z7850LQG Solenoid Control, Mortise, Locked Outside Only, Failsafe, LH, 626, Galaxy | 7.0 |
| Z7850RQG Solenoid Control, Mortise, Locked Outside Only, Failsafe, RH, 626, Galaxy | 7.0 |
| Z7852LQE Solenoid Control, Mortise, Locked Outside Only, Failsecure, LH, 626, Eclipse | 7.0 |
| Z7852LQG Solenoid Control, Mortise, Locked Outside Only, Failsecure, LH, 626, Galaxy | 7.0 |
| Z7250EQ Solenoid Control, Cylindrical, Failsafe, 626, Eclipse | 6.0 |
| Z7250GQ Solenoid Control, Cylindrical, Failsafe, 626, Galaxy | 6.0 |
| Z7252EQ Solenoid Control, Cylindrical, Failsecure, 626, Eclipse | 6.0 |
| Z7252EQ6PKA Solenoid Control, Cylindrical, Failsecure, 626, Eclipse, 6-PIN, Keyed Alike | 6.0 |
| Z7252E5QIC7PKA Solenoid Control, Cylindrical, Failsecure, 626, Eclipse, 7-PIN IC, Keyed Alike | 6.0 |
| Z7252E5QIC7PKD Solenoid Control, Cylindrical, Failsecure, 626, Eclipse, 7-PIN IC, Keyed Different | 6.0 |
| Z7252GQ Solenoid Control, Cylindrical, Failsecure, 626, Galaxy | 6.0 |
| Z7252GQ6PKA Solenoid Control, Cylindrical, Failsecure, 626, Eclipse, 6-PIN, Keyed Alike | 6.0 |
| Z7252G5QIC7PKA Solenoid Control, Cylindrical, Failsecure, 626, Eclipse, 7-PIN IC, Keyed Alike | 6.0 |
| Z7252G5QIC7PKD Solenoid Control, Cylindrical, Failsecure, 626, Eclipse, 7-PIN IC, Keyed Different | 6.0 |
| SK-L90 Solenoid Control Retrofit Kit (Schlage L9000) | 1.0 |
| S7800-REX Request-To-Exit Retrofit Kit (Schlage L9000) | 1.0 |
| B2Q Replacement 2%" Latch Assembly, 626 (Z7200) | 1.0 |





Z7200 "G" Galaxy Trim





All lock models above are locked outside only function.

6

| EXIT DEVICES | & RETROFIT ELR KITS | Weight (lbs) |
|--------------|--|--------------|
| LR100VDK | Motorized ELR Retrofit Kit (Von Duprin 33/35, 98/99) | 2.0 |
| LR100VDK-EM | Motorized ELR Retrofit Kit, External (Von Duprin 33/35, 98/99) | 2.0 |
| LR100VDK-22 | Motorized ELR Retrofit Kit (Von Duprin 22) | 2.0 |
| LR100ARK | Motorized ELR Retrofit Kit (Adams Rite) | 2.0 |
| LR100AWK | Motorized ELR Retrofit Kit (Arrow S1250/S1150) | 2.0 |
| LR100CRK | Motorized ELR Retrofit Kit (Corbin Russwin ED) | 2.0 |
| LR100DAK | Motorized ELR Retrofit Kit (Dorma) | 2.0 |
| LR100DMK | Motorized ELR Retrofit Kit (Dor-O-Matic) | 2.0 |
| LR100DXK | Motorized ELR Retrofit Kit (Detex) | 2.0 |
| LR100FAK | Motorized ELR Retrofit Kit (Falcon 1790/1690) | 2.0 |
| LR100FCK | Motorized ELR Retrofit Kit (First Choice 3700/3600) | 2.0 |
| LR100FRK | Motorized ELR Retrofit Kit (Falcon 24/25) | 2.0 |
| LR100HK | Motorized ELR Retrofit Kit (Hager 4500) | 2.0 |
| LR100JAK | Motorized ELR Retrofit Kit (Jackson 2000) | 2.0 |
| LR100K2K | Motorized ELR Retrofit Kit (Stanley K2 QED) | 2.0 |
| LR100MDK | Motorized ELR Retrofit Kit (Marks) | 2.0 |
| LR100PDK | Motorized ELR Retrofit Kit (PHI Precision Hardware) | 2.0 |
| LR100SDCK | Motorized ELR Retrofit Kit (SDC 6000) | 2.0 |
| LR100SGK | Motorized ELR Retrofit Kit (Sargent 80) | 2.0 |
| LR100YDK | Motorized ELR Retrofit Kit (Yale 7000) | 2.0 |
| LRVD1R | Request-To-Exit Retrofit Kit (Von Duprin 33/35, 98/99) | 1.0 |
| IP100VDK | Motorized ELR Retrofit Kit, PoE (Von Duprin 33/35, 98/99) | 2.0 |
| | | |



| ELECTRIC BOLT | LOCKS | Weight (lbs) |
|---------------|---|--------------|
| 1091AIV | Right Angle, Mortise, Failsafe, 628 | 2.0 |
| 1291AHV | Right Angle, Mortise, Failsecure, 628 | 2.0 |
| FS23MIV | Right Angle, Mortise, Dual-Failsafe, 628 | 2.0 |
| 1490AIV | Right Angle, Narrow, Mortise, Failsafe, 628 | 2.0 |
| 1190AIU | Right Angle, Heavy Duty, Mortise, Failsafe, 630 | 2.0 |
| 2090AHU | Right Angle, Heavy Duty, Mortise, Failsecure, 630 | 3.0 |
| 110IV | Direct Throw, Mortise, Failsafe, 628 | 2.0 |
| 210HV | Direct Throw, Mortise, Failsecure, 628 | 1.0 |
| 160IV | Direct Throw, Auto-Relock, Mortise, Failsafe, 628 | 2.0 |
| 180AIV | Direct Throw, Auto-Relock, Surface, Failsafe, 628 | 3.0 |
| 280AHV | Direct Throw, Auto-Relock, Surface, Failsecure, 628 | 3.0 |
| PD2090ALCU | Panic Device Top Latch Release, LH/RHR, Failsecure, 630 | 2.0 |
| PD2090ARCU | Panic Device Top Latch Release, RH/LHR, Failsecure, 630 | 2.0 |
| 290 | Micro Cabinet | 1.0 |
| 290LS | Micro Cabinet, LLS | 1.0 |
| 100-2 | Replacement Solenoid, Failsafe, 24VAC (1090A, FS23M, 110, 160, 180) | 1.0 |
| 100-4 | Replacement Solenoid, Failsafe, 12/24VDC (1090A, FS23M, 1490A, 110, 160, 180) | 1.0 |
| PR-1000 | Power Regulator | 1.0 |

| ÷ 🔘 | .n.: | |
|-----|---------|--|
| 9 | • • | |
| | 1091AIV | |



160IV



1190AIU

| IP-BASED CONTROLLERS | | Weight (lbs) |
|----------------------|---|--------------|
| IPDCE | IPPro Controller Board with Enclosure | 2.0 |
| IPDSE | IPPro Door Station Expansion Board with Enclosure | 1.0 |
| IPPRO-SKE | IPPro Starter Kit (IPDCE, IPI-30 and IPS-12 included) | 3.0 |
| IPS-12 | IPPro Splitter, 12VDC PoE+ | 1.0 |
| IPI-30 | IPPro Injector, 30W PoE+ | 2.0 |



IPPRO-SKE

| KEYPADS & | & READERS | Weight (lbs) |
|------------|---|--------------|
| IPRW300 | Weigand Reader, Narrow | 1.0 |
| 918U | Indoor Keypad, Single Gang, 630 | 1.0 |
| 918WU | Indoor Keypad, Single Gang, 630, Weigand | 1.0 |
| 920 | Indoor/Outdoor Keypad, Single Gang | 2.0 |
| 920P | Indoor/Outdoor Keypad, Single Gang, Integrated Prox | 2.0 |
| 920PW | Indoor/Outdoor Keypad, Single Gang, Integrated Prox, Weigand | 2.0 |
| 921P | Indoor/Outdoor Keypad with External Electronics, Single Gang, Integrated Prox | 3.0 |
| 923 | Indoor/Outdoor Keypad, Narrow | 2.0 |
| 923P | Indoor/Outdoor Keypad, Narrow, Integrated Prox | 2.0 |
| 923PW | Indoor/Outdoor Keypad, Narrow, Integrated Prox, Weigand | 2.0 |
| 926 | Outdoor Keypad, Single Gang | 3.0 |
| HID1346-10 | Proximity Key Fob Pack, HID Compatible, Quantity 10 | 1.0 |
| HID1326-10 | Proximity Card Pack, HID Compatible, Quantity 10 | 1.0 |
| HID1326-25 | Proximity Card Pack, HID Compatible, Quantity 25 | 1.0 |

| | | / |
|-----------|--|-----|
| E75KQE1Q | Cylindrical, Keypad, 626, Eclipse | 9.0 |
| E75KQG1Q | Cylindrical, Keypad, 626, Galaxy | 9.0 |
| E75KLQE1Q | Cylindrical, Keypad with Privacy, 626, Eclipse | 9.0 |
| E75KLQG1Q | Cylindrical, Keypad with Privacy, 626, Galaxy | 9.0 |
| E75PQE1Q | Cylindrical, Keypad, Integrated Prox, 626, Eclipse | 9.0 |
| E75PQG1Q | Cylindrical, Keypad, Integrated Prox, 626, Galaxy | 9.0 |
| E75PSQE1Q | Cylindrical, Keypad, Integrated Prox with Software, 626, Eclipse | 9.0 |
| 295 | Cabinet Keypad | 1.0 |

| KEY SWIT | CHES | Weight (lbs) |
|-----------------|---|--------------|
| 701U | Single Gang, Alternate Action (AA), SPDT, 630 | 1.0 |
| 702U | Single Gang, Momentary (MO), SPDT, 630 | 1.0 |

Key cylinders not included, order separately. See page 15.







920



923P

Weight (lbs)







| EGRESS DEVICE | S | Weight (lbs) | |
|---------------|--|--------------|-------------|
| PSB560V36 | Pressure Sense Request-To-Exit Bar, 36", DPDT, 628 | 7.0 | |
| PSB560Y36 | Pressure Sense Request-To-Exit Bar, 36", DPDT, 335 | 7.0 | PUSHTO EXIT |
| MSB550V36 | Mechanical Request-To-Exit Bar, 36", SPDT, 628 | 7.0 | PSB560V36 |
| MSB550Y36 | Mechanical Request-To-Exit Bar, 36", SPDT, 335 | 7.0 | |
| MSB550V42 | Mechanical Request-To-Exit Bar, 42", SPDT, 628 | 8.0 | |
| MSB550-2V36 | Mechanical Request-To-Exit Bar, 36", SPDT (2), 628 | 9.0 | 17 |
| MSB550-2Y36 | Mechanical Request-To-Exit Bar, 36", SPDT (2), 335 | 9.0 | mail |
| MSB550-2WV36 | Mechanical Request-To-Exit Bar, 36", SPDT (2), 628, Weatherized | 7.0 | |
| 00511 | Request-To-Exit Retrofit Kit (Von Duprin 55) | 1.0 | |
| 00512 | Request-To-Exit Retrofit Kit (Von Duprin 88) | 1.0 | |
| 00514 | Request-To-Exit Retrofit Kit (Dor-O-Matic 990, 1090, 1990, 2090) | 1.0 | 00514 |
| 00519 | Request-To-Exit Retrofit Kit (Jackson 1095) | 1.0 | |
| 00527 | Request-To-Exit Retrofit Kit (Sargent 80 and Arrow S3800, S120) | 1.0 | |
| 00531 | Request-To-Exit Retrofit Kit (Yale 7000 and Corbin 4000, 5000) | 1.0 | |

| EXIT SWIT | CHES & SENSORS | Weight (lbs) |
|-----------|--|--------------|
| 412NU | Narrow, Push Button, Momentary (MO), SPDT, 630 | 1.0 |
| 413MNU | Narrow, Push Button, Code Compliant Timer, Fixed (30 seconds), DPDT, 630 | 1.0 |
| 413NU | Narrow, Push Button, Electronic Timer, Adjustable (1-60 seconds), DPDT, 630 | 1.0 |
| 413PNU | Narrow, Push Button, Pneumatic Timer, Adjustable (1-45 seconds), SPDT, 630 | 1.0 |
| 422U | Single Gang, Push Button, Momentary (MO), SPDT, 630 | 1.0 |
| 423MU | Single Gang, Push Button, Code Compliant Timer, Fixed (30 seconds), DPDT, 630 | 1.0 |
| 423PU | Single Gang, Push Button, Pneumatic Timer, Adjustable (1-45 seconds), SPDT, 630 | 1.0 |
| 423U | Single Gang, Push Button, Electronic Timer, Adjustable (1-60 seconds), DPDT, 630 | 1.0 |
| 432KUR | Single Gang, Mushroom Button, Momentary (MO) Latching with Key Reset, DPST, 630 | 1.0 |
| 463NU | Narrow, Touch Sensor, Electronic Timer, Adjustable (1-40 seconds), SPDT, 630 | 1.0 |
| 463U | Single Gang, Touch Sensor, Electronic Timer, Adjustable (1-40 seconds), SPDT, 630 | 1.0 |
| 474U | Single Gang, No Touch Sensor, Electronic Timer, Adjustable (1-40 seconds), SPDT, 630 | 1.0 |
| MD-31DB | Request-To-Exit (REX) PIR Motion Sensor, Black | 1.0 |
| MD-31DOW | Request-To-Exit (REX) PIR Motion Sensor, White | 1.0 |
| EP499 | Hazardous Exit Switch, Mushroom Button, Momentary (MO), DPDT | 3.0 |







EP499



0



No Touc TO OPEN



474U

| EMERGENCY DOOR RELEASES | | Weight (lbs) |
|-------------------------|--|--------------|
| 491 | Emergency Break Glass Station, Blue | 2.0 |
| 492 | Emergency Pull Station, Blue | 2.0 |
| EP493 | Hazardous Emergency Pull Station, Blue | 3.0 |
| 491-BB | Blue Surface Mount Back Box, 5¼" x 3¼" x 1½" (491) | 2.0 |
| 492-BB | Blue Surface Mount Back Box, 4¾" x 3½" x 1½" (492) | 2.0 |
| 491-GL4 | Replacement Glass Plates, Quantity 4 (491) | 1.0 |
| 492-GL4 | Replacement Glass Rods, Quantity 4 (492) | 1.0 |







492



EP493

| PUSH PLAT | ES & PANELS | Weight (lbs) | 2 |
|-----------|--|--------------|--------------------|
| 482A1U | Narrow Plate, PUSH TO OPEN, ISA Wheelchair, Blue Infill, SPDT, 630 | 1.0 | Q. |
| 482A2U | Single Gang Plate, PUSH TO OPEN, ISA Wheelchair, Blue Infill, SPDT, 630 | 1.0 | PUSH TO OPEN |
| 482O2U | Single Gang Plate, PUSH TO OPEN, Black Infill, SPDT, 630 | 1.0 | 482A1U |
| 484A2U | Single Gang Plate, PUSH TO OPEN, ISA Wheelchair, Blue Infill, DPDT, 630 | 1.0 | |
| 482A4U | Double Gang Plate, Square, PUSH TO OPEN, ISA Wheelchair, Blue Infill, SPDT, 630 | 1.0 | • |
| 482A4RU | Double Gang Plate, Round, PUSH TO OPEN, ISA Wheelchair, Blue Infill, SPDT, 630 | 1.0 | PUSH |
| 484A4U | Double Gang Plate, Square, PUSH TO OPEN, ISA Wheelchair, Blue Infill, DPDT, 630 | 1.0 | OPEN |
| 482O4U | Double Gang Plate, Square, PUSH TO OPEN, Black Infill, SPDT, 630 | 1.0 | 48202U |
| 482AA36V | 36" Push Panel, PUSH TO OPEN, ISA Wheelchair, Blue Infill, SPDT, 628 | 7.0 | |
| 400RC433 | 433MHz One Channel Receiver | 1.0 | E |
| 400W1-433 | 433MHz Micro Transmitter | 1.0 | PUSH TO OPEN |
| 482S-KIT | Wireless Push Plate Kit, Square Plates | 5.0 | |
| 482R-KIT | Wireless Push Plate Kit, Round Plates | 5.0 | 482A4RU |
| 480-1SB | Narrow Surface Box, Battery Clip, 1¾" x 4¾16" x 1¾" | 1.0 | • |
| 480-2SB | Single Gang Surface Box, Battery Clip, 2¾" x 4½" x 1‰" | 1.0 | |
| 480-SFB | $4 \ensuremath{\mathcal{V}}\xspace^{\ensuremath{\mathcal{V}}\xspace}$ and 6" Square Flush Recessed Box, Battery Clip, Weatherized, $6 \ensuremath{\mathcal{3}}\xspace^{\ensuremath{\mathcal{A}}\xspace}$, $2 \ensuremath{\mathcal{M}}\xspace^{\ensuremath{\mathcal{M}}\xspace}$ | 2.0 | 201 |
| 480-SSB | $4 ^{\prime \prime _2}$ " and 6" Square Surface Box, Battery Clip, Weatherized, $5 ^{\prime \prime _2}$ " x $5 ^{\prime \prime _2}$ " x $2 ^{\prime \prime _8}$ " | 1.0 | 480-1SB |

| BOLLARDS | | Weight (lbs) |
|-----------|--|--------------|
| BPS6SV | Surface Mount, Single Gang Prep, 6" x 6" x 42", 628 | 17.0 |
| BPS6DV | Surface Mount, Double Gang Prep, 6" x 6" x 42", 628 | 17.0 |
| BPS6PV | Surface Mount, Panel Prep, 6" x 6" x 42", 628 | 17.0 |
| CBC482A4U | Surface Mount, CBC High-Low Prep, 6" x 6" x 42", 628 (Square Push Plates Included) | 20.0 |

Push plates not included with BP series bollards, order separately.







CBC482A4U

| POWER TRAI | NSFER DEVICES | Weight (lbs) |
|-------------|--|--------------|
| PTH-2+4Q | Hinge, Six Conductors, 626 | 2.0 |
| PTH-2+4QDPS | Hinge, Six Conductors, 626, DPS | 2.0 |
| PTH-4Q | Hinge, Four Conductors, 626 | 1.0 |
| PTH-4QDPS | Hinge, Four Conductors, 626, DPS | 2.0 |
| PTH-10Q | Hinge, Ten Conductors, 626 | 2.0 |
| PT-2U | Loop, Surface Mount, 18" x ¼" ID, Plastic End Caps, 630 | 1.0 |
| PT-3V | Loop, Surface Mount, 20" x ¼" ID, Aluminum Box End Caps, 628 | 1.0 |
| PT-3/8V | Loop, Surface Mount, 20" x %" ID, Aluminum Box End Caps, 628 | 1.0 |
| PT-5 | Loop, Concealed Mortise, 111/2" x 1" x ¾" | 1.0 |
| PTM-2AL | Mortise Device, Two Conductors, 628 | 2.0 |
| PTM-10AL | Mortise Device, Ten Conductors, 628 | 2.0 |
| WPT | Wireless Device, Mortise, RF Transmission | 1.0 |
| 7000-DGK | Laser Guided Door Core Wire Raceway Kit | 11.0 |
| 7000-DB3/8 | Evacuator Drill Bit, ¾" x 50" | 3.0 |

| PTH-2+4Q |
|----------|
| PT-2U |
| 7000-DGK |



631RF







TR12



RB12V4

| POWER CO | INTROLLERS | Weight (lbs) |
|----------|---|--------------|
| 602RF | Regulated & Filtered Linear DC Power Controller with Cabinet, 1 Amp | 9.0 |
| 602RFL | Regulated & Filtered Linear DC Power Controller less Cabinet, 1 Amp | 3.0 |
| 631RF | Regulated & Filtered Linear DC Power Controller with Cabinet, 1.5 Amp | 9.0 |
| 631RFA | Regulated & Filtered Linear DC Power Controller with Large Cabinet, 1.5 Amp | 20.0 |
| 631RFL | Regulated & Filtered Linear DC Power Controller less Cabinet, 1.5 Amp | 3.0 |
| 632RF | Regulated & Filtered Linear DC Power Controller with Cabinet, 2 Amp | 9.0 |
| 632RFL | Regulated & Filtered Linear DC Power Controller less Cabinet, 2 Amp | 3.0 |
| 634RF | Regulated & Filtered Linear DC Power Controller with Cabinet, 4 Amp | 25.0 |
| 636RF | Regulated & Filtered Linear DC Power Controller with Cabinet, 6 Amp | 25.0 |
| TR12 | Regulated 12VDC Plug-In Power Transformer, 1 Amp | 2.0 |
| TR24 | Regulated 24VDC Plug-In Power Transformer, 1 Amp | 2.0 |
| 12VR | Voltage Regulating Sequencer | 1.0 |
| RB12V4 | 12V/5Ah Battery | 4.0 |
| RB12V4-2 | 12V/5Ah Battery, Quantity 2 | 8.0 |
| RB12V7 | 12V/8Ah Battery | 6.0 |
| | | |

| DOOR CONTROLLERS | | Weight (lbs) |
|------------------|---|--------------|
| UR-1 | Universal Microprocessor Controller, Two Relays | 1.0 |
| UR2-4 | Universal Microprocessor Controller, Four Relays | 1.0 |
| UR4-8 | Universal Microprocessor Controller, Eight Relays | 1.0 |



UR4-8

| REMOTE | OTE CONTROL CONSOLES Weig | |
|--------|---|-----|
| D15-2 | Concealed Desk Switch, Momentary (MO), SPDT | 1.0 |

Weight (lbs) **DOOR PROP ALARMS & ANNUNCIATORS** EA-SN Door Prop Alarm, Single Gang, LED & Siren, 628 1.0 EA-728V Door Prop Alarm, Double Gang, LED & Siren, Keylock Control, 628 1.0 EA-708V Door Prop Alarm, Double Gang, LED & Siren, Mortise Key Cylinder Prep, 628 1.0 EA100 Multi-Mode Visual Annunciator 1.0 400U-SN Alarm Siren, Single Gang, 630 1.0 400U-RMB Alarm Buzzer, Single Gang, 630 1.0



EA-728V

EA100

| ACCESSORIES & MISC | | Weight (lbs) |
|--------------------|---|--------------|
| EH201224A | Electromagnetic Door Holder, Semi-Flush, 12/24VAC/DC, 689 | 3.0 |
| EH2024120A | Electromagnetic Door Holder, Semi-Flush, 24VAC/DC/120VAC, 689 | 3.0 |
| EH301224A | Electromagnetic Door Holder, Surface, 12/24VAC/DC, 689 | 3.0 |
| MC-4MU | Monitoring Switch, Concealed Magnetic Contact, SPDT, 630, DPS | 1.0 |
| MC-4 | Monitoring Switch, Recessed Magnetic Contact, SPDT, DPS | 1.0 |
| MC-4PAK | Monitoring Switch Pack, Recessed Magnetic Contact, SPDT, DPS, Quantity 10 | 2.0 |
| MC-7 | Monitoring Switch, Recessed High Security Magnetic Contact, SPDT, DPS | 1.0 |
| MS-12 | Monitoring Strike, Cylindrical, 2¾", SPDT, LS | 1.0 |
| MS-14 | Monitoring Strike, Cylindrical, 47/8", SPDT, LS | 1.0 |
| MS-16 | Monitoring Strike, Mortise, SPDT, LS | 1.0 |
| MS-18 | Monitoring Strike, Mortise, SPDT, BPS | 1.0 |
| MS-20 | Monitoring Strike, Mortise, SPDT, LS/BPS | 1.0 |
| WRC-2B | 433MHz Wireless Transmitter Pendant, Two Button | 1.0 |
| WRC-R2 | 433MHz Wireless Receiver, Two Channel | 1.0 |
| BR64XL | AC to DC Bridge Rectifier | 1.0 |
| CYL-6KAQ | Mortise Cylinder, 6-Pin, 11/8" Length, Keyed Alike, 626 | 1.0 |
| CYL-6KDQ | Mortise Cylinder, 6-Pin, 11/8" Length, Keyed Different, 626 | 1.0 |








CYL-6KDQ

COMPLETE COMPONENT CONSIDERATIONS

With a robust toolbox of over 35,000 SDC access & egress control components at your fingertips, you can assemble turnkey solutions to address both market-specific and application-specific requirements for almost any door opening imagined – while addressing a variety of factors, including:

- Level of Security
- Budget Restrictions
- Type of Door or Frame

- Life Safety Codes
- Aesthetics
- Retrofit or New Construction

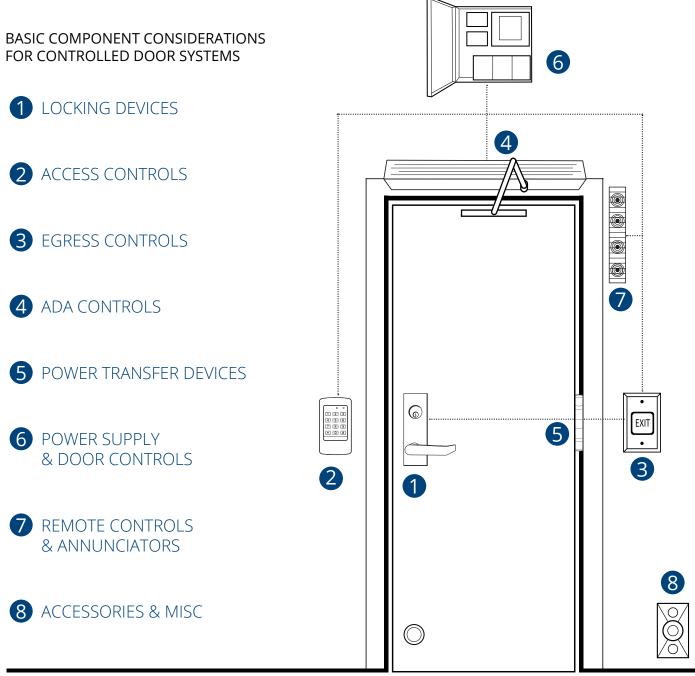

Components not to scale





1 LOCKING DEVICES



Latch & Deadbolt Wireless ⁻ Monitoring Strikes & Re

Wireless Transmitters & Receivers

17

Communicating Bathroom Switches

CHECK OUT **SDC ONLINE** FOR ALL YOUR PROJECT NEEDS


Our fully featured website has all the information, solutions and tools you'll need, including:

- Data Sheets
- Pricesheets
- Solution Flyers
- Cool Tools
- Installation Instructions
- Comparison Charts
- UL Listings
- 3 Part Specs

- Videos
- Document Library
- Image Library
- And More!



www.sdcsecurity.com

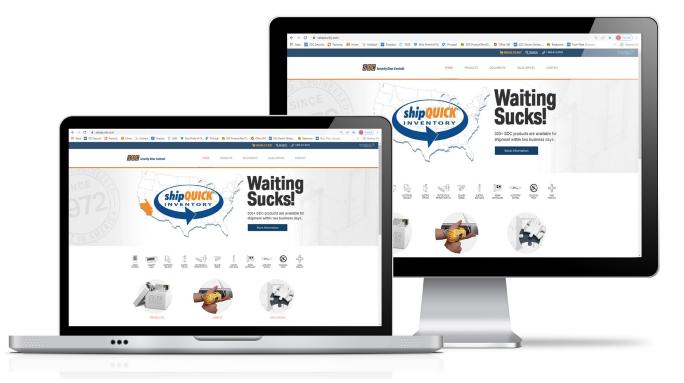

WE'RE HERE TO HELP



Our fully staffed customer service department, technicians and engineers are available to assist with your design, discuss an application and coordinate all phases of your order.

- Product, application and installation assistance
- Ordering assistance
- Price and delivery quotation
- Purchase order status

Customer Support Hours:

Monday – Friday, Pacific Standard Time

Technical Support Return Authorizations Sales Invoices 6:30am – 4:30pm 8:00am – 4:30pm 8:00am – 4:30pm 8:00am – 4:30pm

Contact us by Mail:

Factory Mailing Address P.O. Box 3670 Camarillo, CA 93011-3670, USA

Factory Shipping Address 801 Avenida Acaso, Camarillo, CA 93012, USA

Contact us by Phone:

(805) 494-0622 (800) 413-8783

USA Toll Free

Contact us by Email:

service@sdcsecurity.com



Waiting Sucks!

Security Dealers, Integrators, Installers and Distributors: Keep your copy of the shipQUICK inventory readily available so you know firsthand which products your SDC distributor can expedite for you. Check the SDC website periodically to download revised inventory list, product datasheets and more.

