

shipQUICK INVENTORY PROGRAM



Waiting Sucks!

the lock behind the system

SDC
Security Door Controls




Security Dealers, Integrators, Installers & Distributors

300+ SDC products are available for shipment within two business day. Keep your copy of the shipQUICK inventory readily available so you know firsthand which products your SDC distributor can expedite for you.

sdcsecurity.com/shipquick

Check the SDC website periodically to download revised inventory lists, product datasheets and more.

Estimated UPS Ground Delivery Time

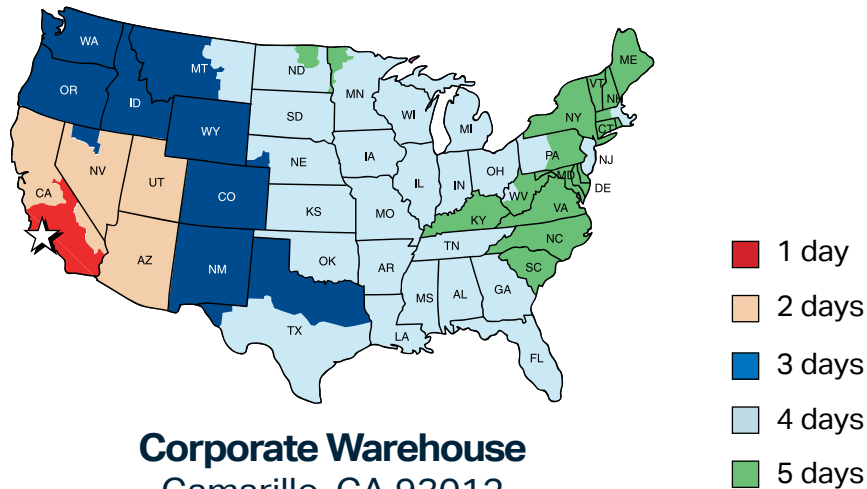

Delivery time-in-transit maps are for reference only and subject to change by UPS.

shipQUICK Program Policy

- Available to SDC Direct Accounts
- Contact SDC sales department or your local SDC sales representative for participating qualifications
- Maximum quantity 10 allowed per product
- Qualifying orders will ship by next business day
- shipQUICK orders are non-cancellable
- Availability limited to shipQUICK inventory on hand
- No backorders; all items on multiple product orders must ship from shipQUICK inventory
- Freight paid by customer
- Standard SDC payment terms apply

ELECTROMAGNETIC LOCKS		Weight (lbs)
1511V	Single EMLock, 1650lbs, 628	11.0
1511VD	Single EMLock, 1650lbs, 628, DPS	11.0
1511X	Single EMLock, 1650lbs, 710	11.0
1512V	Double EMLock, 1650lbs, 628	27.0
1571V	Single EMLock, 1200lbs, 628	11.0
1571VD	Single EMLock, 1200lbs, 628, DPS	11.0
1571X	Single EMLock, 1200lbs, 710	11.0
1572V	Double EMLock, 1200lbs, 628	27.0
1575U	Single Gate Lock, 1200lbs, 630	11.0
1576U	Single Gate Lock, Face Drilled, 1200lbs, 630	10.0
1581V	Single EMLock, 650lbs, 628	5.0
1581VD	Single EMLock, 650lbs, 628, DPS	5.0
1581X	Single EMLock, 650lbs, 710	5.0
1582V	Double EMLock, 650lbs, 628	8.0
E6200	Single Excel Lock, 1200lbs, 630	12.0
E1200	Single Excel Lock, 1200lbs, 628	10.0
E600	Single Excel Lock, 600lbs, 628	7.0
350V	Single Narrow Lock, 1200lbs, 628	10.0
352V	Double Narrow Lock, 1200lbs, 628	19.0
1591U	Single Sliding Door Lock, 850lbs, 630	5.0
E300	Single Micro Cabinet Lock, 300lbs, 628	5.0
TJ1V	Top Jamb Mounting Kit, 628 (1511, 1571)	5.0
TJ2V	Top Jamb Mounting Kit, 628 (1512, 1572)	9.0
TJ81V	Top Jamb Mounting Kit, 628 (1581)	6.0
TJ82V	Top Jamb Mounting Kit, 628 (1582)	6.0
TJ62	Top Jamb Mounting Kit, 628 (E6200)	4.0
E12Z	Top Jamb Mounting Kit, 628 (E1200)	3.0
E6Z	Top Jamb Mounting Kit, 628 (E600)	3.0
TJ350	Top Jamb Mounting Kit, 628 (350)	5.0
TJ352	Top Jamb Mounting Kit, 628 (352)	9.0
UF11V	Spacer Bracket, 628 (1511, 1571)	1.0
UB11V	Header Bracket, 628 (1511, 1571)	1.0
HDB1V	Glass Door Mounting Kit, 628 (1511, 1571, 1581)	3.0
HDB2V	Glass Door Mounting Kit, 628 (1512, 1572, 1582)	6.0
HDB352V	Glass Door Mounting Kit, 628 (352)	6.0
E12U	Glass Door Mounting Kit, 628 (E1200)	3.0
E6U	Glass Door Mounting Kit, 628 (E600)	3.0



1511



1512



E6200




E1200




TJ1V



HDB1

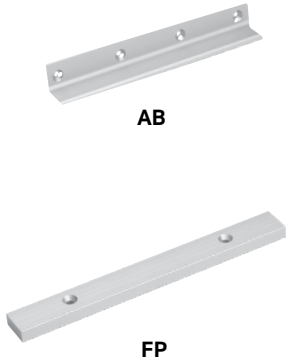

ELECTROMAGNETIC LOCKS (continued)		Weight (lbs)
AB03V	Angle Bracket, 1½" x 1½" x 8¾", 628 (1581)	1.0
AB04V	Angle Bracket, 2" x 1½" x 8¾", 628 (1581)	1.0
AB13V	Angle Bracket, 1½" x 1½" x 11", 628 (1511, 1571)	2.0
AB14V	Angle Bracket, 2" x 1½" x 11", 628 (1511, 1571)	2.0
AB23V	Angle Bracket, 1½" x 1½" x 22", 628 (1512, 1572)	2.0
AB24V	Angle Bracket, 2" x 1½" x 22", 628 (1512, 1572)	3.0
AB32V	Angle Bracket, 1½" x 1½" x 17½", 628 (1582)	2.0
AB33V	Angle Bracket, 2" x 1½" x 17½", 628 (1582)	2.0
FP04V	Filler Plate, ½" x 1¼" x 8¾", 628 (1581)	1.0
FP05V	Filler Plate, ⅝" x 1¼" x 8¾", 628 (1581)	1.0
FP11V	Filler Plate, ⅞" x 1¼" x 11", 628 (1511, 1571)	1.0
FP12V	Filler Plate, ¼" x 1¼" x 11", 628 (1511, 1571)	1.0
FP14V	Filler Plate, ½" x 1¼" x 11", 628 (1511, 1571)	1.0
FP15V	Filler Plate, ⅝" x 1¼" x 11", 628 (1511, 1571)	2.0
FP24V	Filler Plate, ½" x 1¼" x 22", 628 (1512, 1572)	2.0
FP25V	Filler Plate, ⅝" x 1¼" x 22", 628 (1512, 1572)	3.0
FP33V	Filler Plate, ½" x 1¼" x 17½", 628 (1582)	2.0
FP34V	Filler Plate, ⅝" x 1¼" x 17½", 628 (1582)	2.0
1576-ZBV	Z Bracket, 628 (1576)	4.0
1576-MP	Armature Mounting Plate, 628 (1576)	1.0
AMP	Armature Mounting Plate, 628 (1591)	1.0
EZ-D-10	Door Position Status (DPS) Retrofit Kit (1511, 1512, 1571, 1572)	1.0
EZ-D-80	Door Position Status (DPS) Retrofit Kit (1581, 1582)	1.0
PCB112B01-A	Replacement EMLock Board (1511, 1512, 1571, 1572)	1.0



ELECTROMAGNETIC SHEAR LOCKS		Weight (lbs)
1561ITC	Concealed, 2000lbs, 628, Inverted Top Channel	5.0
1562ITC	Concealed, External Electronics, 2000lbs, 628, Inverted Top Channel	5.0
1565ITC	Concealed, 2700lbs, 628, Inverted Top Channel	7.0

DELAYED EGRESS LOCKS		Weight (lbs)
1511SBDKV	Single Delayed Egress EMLock, 1650lbs, BD Operation, Key Control, 628	13.0
1511SNAKV	Single Delayed Egress EMLock, 1650lbs, NA Operation, Key Control, 628	14.0
1511SNAKVD	Single Delayed Egress EMLock, 1650lbs, NA Operation, Key Control, 628, DPS	14.0
1511SNCKV	Single Delayed Egress EMLock, 1650lbs, NC Operation, Key Control, 628	14.0
1511SNDKV	Single Delayed Egress EMLock, 1650lbs, ND Operation, Key Control, 628	14.0
1511TNAKV	Tandem Delayed Egress EMLock, 1650lbs, NA Operation, Key Control, 628	25.0
1511TNDKV	Tandem Delayed Egress EMLock, 1650lbs, ND Operation, Key Control, 628	25.0
1581SBDV	Single Delayed Egress EMLock, 650lbs, BD Operation, 628	7.0
1581SNDV	Single Delayed Egress EMLock, 650lbs, ND Operation, 628	7.0
1581SNDVD	Single Delayed Egress EMLock, 650lbs, ND Operation, 628, DPS	7.0
1581S-TC3	Cable Kit, Frame Header Connection (1581S)	1.0
101-DENA	Keypad Controller, NA Operation	2.0
101-KDENA	Keypad & Key Switch Controller, NA Operation	2.0
1511DEV	Single Delayed Egress EMLock, Controller Dependent, 1650lbs	11.0
1581DEV	Single Delayed Egress EMLock, Controller Dependent, 650lbs	7.0



1511S



1581S



**101-DENA
1581DEV**

ELECTRIC STRIKES		Weight (lbs)
15-4S24U	Value, Cylindrical, Failsecure, 24VDC, 630	2.0
15-4S12U	Value, Cylindrical, Failsecure, 12VDC, 630	2.0
25-4U	Value, 5/8" Latchbolt, 630, LLS	2.0
30-4-24U	Rim Mount Exit Device, Failsecure, 24VDC, 630	4.0
45-A	Centerline, Faceplate Kit, 630/628, LLS	2.0
45-4SU	Centerline, Square Corner, 630, LLS	2.0
45F-4SU	Centerline, Fire-Rated, Square Corner, 630, LLS	2.0
55-ABCU	Heavy Duty, Faceplate Kit, 630	2.0
55-AU	Heavy Duty, Cylindrical, 630	3.0
55-BU	Heavy Duty, Mortise, Deadlatch Below, 630	3.0
55-CU	Heavy Duty, Mortise, Deadlatch Above, 630	3.0
55-DU	Heavy Duty, Mortise, Deadlatch Below, Deadbolt, 630	3.0
55-EU	Heavy Duty, Mortise, Deadbolt, 630	3.0
55-FU	Heavy Duty, Mortise, Deadlatch Above, Deadbolt, 630	3.0



45-A




55-DU



Z7200
"E" Eclipse Trim



Z7200
"G" Galaxy Trim



Z7800



SK-L90

ELECTRIFIED LOCKSETS

Weight (lbs)

S75BLCQ	Replacement HiTower Controller, LH, 24VDC, 626 (Schlage L9080)	2.0
S75BRCQ	Replacement HiTower Controller, RH, 24VDC, 626 (Schlage L9080)	2.0
Z7652LQE	Motorized ELR Control, Mortise, Locked Outside Only, Failsecure, LH, 626, Eclipse	6.0
Z7652RQE	Motorized ELR Control, Mortise, Locked Outside Only, Failsecure, RH, 626, Eclipse	6.0
Z7850LQE	Solenoid Control, Mortise, Locked Outside Only, Failsafe, LH, 626, Eclipse	7.0
Z7850LQG	Solenoid Control, Mortise, Locked Outside Only, Failsafe, LH, 626, Galaxy	7.0
Z7850RQG	Solenoid Control, Mortise, Locked Outside Only, Failsafe, RH, 626, Galaxy	7.0
Z7852LQE	Solenoid Control, Mortise, Locked Outside Only, Failsecure, LH, 626, Eclipse	7.0
Z7852LQG	Solenoid Control, Mortise, Locked Outside Only, Failsecure, LH, 626, Galaxy	7.0
Z7250EQ	Solenoid Control, Cylindrical, Failsafe, 626, Eclipse	6.0
Z7250GQ	Solenoid Control, Cylindrical, Failsafe, 626, Galaxy	6.0
Z7252EQ	Solenoid Control, Cylindrical, Failsecure, 626, Eclipse	6.0
Z7252EQ6PKA	Solenoid Control, Cylindrical, Failsecure, 626, Eclipse, 6-PIN, Keyed Alike	6.0
Z7252E5QIC7PKA	Solenoid Control, Cylindrical, Failsecure, 626, Eclipse, 7-PIN IC, Keyed Alike	6.0
Z7252E5QIC7PKD	Solenoid Control, Cylindrical, Failsecure, 626, Eclipse, 7-PIN IC, Keyed Different	6.0
Z7252GQ	Solenoid Control, Cylindrical, Failsecure, 626, Galaxy	6.0
Z7252GQ6PKA	Solenoid Control, Cylindrical, Failsecure, 626, Eclipse, 6-PIN, Keyed Alike	6.0
Z7252G5QIC7PKA	Solenoid Control, Cylindrical, Failsecure, 626, Eclipse, 7-PIN IC, Keyed Alike	6.0
Z7252G5QIC7PKD	Solenoid Control, Cylindrical, Failsecure, 626, Eclipse, 7-PIN IC, Keyed Different	6.0
SK-L90	Solenoid Control Retrofit Kit (Schlage L9000)	1.0
S7800-REX	Request-To-Exit Retrofit Kit (Schlage L9000)	1.0
B2Q	Replacement 2¾" Latch Assembly, 626 (Z7200)	1.0

All lock models above are locked outside only function.

EXIT DEVICES & RETROFIT ELR KITS		Weight (lbs)
LR100VDK	Motorized ELR Retrofit Kit (Von Duprin 33/35, 98/99)	2.0
LR100VDK-EM	Motorized ELR Retrofit Kit, External (Von Duprin 33/35, 98/99)	2.0
LR100VDK-22	Motorized ELR Retrofit Kit (Von Duprin 22)	2.0
LR100ARK	Motorized ELR Retrofit Kit (Adams Rite)	2.0
LR100AWK	Motorized ELR Retrofit Kit (Arrow S1250/S1150)	2.0
LR100CRK	Motorized ELR Retrofit Kit (Corbin Russwin ED)	2.0
LR100DAK	Motorized ELR Retrofit Kit (Dorma)	2.0
LR100DMK	Motorized ELR Retrofit Kit (Dor-O-Matic)	2.0
LR100DXK	Motorized ELR Retrofit Kit (Detex)	2.0
LR100FAK	Motorized ELR Retrofit Kit (Falcon 1790/1690)	2.0
LR100FCK	Motorized ELR Retrofit Kit (First Choice 3700/3600)	2.0
LR100FRK	Motorized ELR Retrofit Kit (Falcon 24/25)	2.0
LR100HK	Motorized ELR Retrofit Kit (Hager 4500)	2.0
LR100JAK	Motorized ELR Retrofit Kit (Jackson 2000)	2.0
LR100K2K	Motorized ELR Retrofit Kit (Stanley K2 QED)	2.0
LR100MDK	Motorized ELR Retrofit Kit (Marks)	2.0
LR100PDK	Motorized ELR Retrofit Kit (PHI Precision Hardware)	2.0
LR100SDCK	Motorized ELR Retrofit Kit (SDC 6000)	2.0
LR100SGK	Motorized ELR Retrofit Kit (Sargent 80)	2.0
LR100YDK	Motorized ELR Retrofit Kit (Yale 7000)	2.0
LRVD1R	Request-To-Exit Retrofit Kit (Von Duprin 33/35, 98/99)	1.0
IP100VDK	Motorized ELR Retrofit Kit, PoE (Von Duprin 33/35, 98/99)	2.0



LR100



1091AIV



160IV



1190AIU



IPPro-SKE

ELECTRIC BOLT LOCKS		Weight (lbs)
1091AIV	Right Angle, Mortise, Failsafe, 628	2.0
1291AHV	Right Angle, Mortise, Failsecure, 628	2.0
FS23MIV	Right Angle, Mortise, Dual-Failsafe, 628	2.0
1490AIV	Right Angle, Narrow, Mortise, Failsafe, 628	2.0
1190AIU	Right Angle, Heavy Duty, Mortise, Failsafe, 630	2.0
2090AHU	Right Angle, Heavy Duty, Mortise, Failsecure, 630	3.0
110IV	Direct Throw, Mortise, Failsafe, 628	2.0
210HV	Direct Throw, Mortise, Failsecure, 628	1.0
160IV	Direct Throw, Auto-Relock, Mortise, Failsafe, 628	2.0
180AIV	Direct Throw, Auto-Relock, Surface, Failsafe, 628	3.0
280AHV	Direct Throw, Auto-Relock, Surface, Failsecure, 628	3.0
PD2090ALCU	Panic Device Top Latch Release, LH/RHR, Failsecure, 630	2.0
PD2090ARCU	Panic Device Top Latch Release, RH/LHR, Failsecure, 630	2.0
290	Micro Cabinet	1.0
290LS	Micro Cabinet, LLS	1.0
100-2	Replacement Solenoid, Failsafe, 24VAC (1090A, FS23M, 110, 160, 180)	1.0
100-4	Replacement Solenoid, Failsafe, 12/24VDC (1090A, FS23M, 1490A, 110, 160, 180)	1.0
PR-1000	Power Regulator	1.0

IP-BASED CONTROLLERS		Weight (lbs)
IPDCE	IPPro Controller Board with Enclosure	2.0
IPDSE	IPPro Door Station Expansion Board with Enclosure	1.0
IPPro-SKE	IPPro Starter Kit (IPDCE, IPI-30 and IPS-12 included)	3.0
IPS-12	IPPro Splitter, 12VDC PoE+	1.0
IPI-30	IPPro Injector, 30W PoE+	2.0

KEYPADS & READERS		Weight (lbs)
IPRW300	Weigand Reader, Narrow	1.0
918U	Indoor Keypad, Single Gang, 630	1.0
918WU	Indoor Keypad, Single Gang, 630, Weigand	1.0
920	Indoor/Outdoor Keypad, Single Gang	2.0
920P	Indoor/Outdoor Keypad, Single Gang, Integrated Prox	2.0
920PW	Indoor/Outdoor Keypad, Single Gang, Integrated Prox, Weigand	2.0
921P	Indoor/Outdoor Keypad with External Electronics, Single Gang, Integrated Prox	3.0
923	Indoor/Outdoor Keypad, Narrow	2.0
923P	Indoor/Outdoor Keypad, Narrow, Integrated Prox	2.0
923PW	Indoor/Outdoor Keypad, Narrow, Integrated Prox, Weigand	2.0
926	Outdoor Keypad, Single Gang	3.0
HID1346-10	Proximity Key Fob Pack, HID Compatible, Quantity 10	1.0
HID1326-10	Proximity Card Pack, HID Compatible, Quantity 10	1.0
HID1326-25	Proximity Card Pack, HID Compatible, Quantity 25	1.0



918



920



923P

STANDALONE LOCKSETS		Weight (lbs)
E75KQE1Q	Cylindrical, Keypad, 626, Eclipse	9.0
E75KQG1Q	Cylindrical, Keypad, 626, Galaxy	9.0
E75KLQE1Q	Cylindrical, Keypad with Privacy, 626, Eclipse	9.0
E75KLQG1Q	Cylindrical, Keypad with Privacy, 626, Galaxy	9.0
E75PQE1Q	Cylindrical, Keypad, Integrated Prox, 626, Eclipse	9.0
E75PQG1Q	Cylindrical, Keypad, Integrated Prox, 626, Galaxy	9.0
E75PSQE1Q	Cylindrical, Keypad, Integrated Prox with Software, 626, Eclipse	9.0
295	Cabinet Keypad	1.0



E75

KEY SWITCHES		Weight (lbs)
701U	Single Gang, Alternate Action (AA), SPDT, 630	1.0
702U	Single Gang, Momentary (MO), SPDT, 630	1.0




700

Key cylinders not included, order separately. See page 15.



PSB560V



00514



422U



463U



474U



MD-31DB

EGRESS DEVICES		Weight (lbs)
PSB560V36	Pressure Sense Request-To-Exit Bar, 36", DPDT, 628	7.0
PSB560Y36	Pressure Sense Request-To-Exit Bar, 36", DPDT, 335	7.0
MSB550V36	Mechanical Request-To-Exit Bar, 36", SPDT, 628	7.0
MSB550Y36	Mechanical Request-To-Exit Bar, 36", SPDT, 335	7.0
MSB550V42	Mechanical Request-To-Exit Bar, 42", SPDT, 628	8.0
MSB550-2V36	Mechanical Request-To-Exit Bar, 36", SPDT (2), 628	9.0
MSB550-2Y36	Mechanical Request-To-Exit Bar, 36", SPDT (2), 335	9.0
MSB550-2WV36	Mechanical Request-To-Exit Bar, 36", SPDT (2), 628, Weatherized	7.0
00511	Request-To-Exit Retrofit Kit (Von Duprin 55)	1.0
00512	Request-To-Exit Retrofit Kit (Von Duprin 88)	1.0
00514	Request-To-Exit Retrofit Kit (Dor-O-Matic 990, 1090, 1990, 2090)	1.0
00519	Request-To-Exit Retrofit Kit (Jackson 1095)	1.0
00527	Request-To-Exit Retrofit Kit (Sargent 80 and Arrow S3800, S120)	1.0
00531	Request-To-Exit Retrofit Kit (Yale 7000 and Corbin 4000, 5000)	1.0

EXIT SWITCHES & SENSORS		Weight (lbs)
412NU	Narrow, Push Button, Momentary (MO), SPDT, 630	1.0
413MNU	Narrow, Push Button, Code Compliant Timer, Fixed (30 seconds), DPDT, 630	1.0
413NU	Narrow, Push Button, Electronic Timer, Adjustable (1-60 seconds), DPDT, 630	1.0
413PNU	Narrow, Push Button, Pneumatic Timer, Adjustable (1-45 seconds), SPDT, 630	1.0
422U	Single Gang, Push Button, Momentary (MO), SPDT, 630	1.0
423MU	Single Gang, Push Button, Code Compliant Timer, Fixed (30 seconds), DPDT, 630	1.0
423PU	Single Gang, Push Button, Pneumatic Timer, Adjustable (1-45 seconds), SPDT, 630	1.0
423U	Single Gang, Push Button, Electronic Timer, Adjustable (1-60 seconds), DPDT, 630	1.0
432KUR	Single Gang, Mushroom Button, Momentary (MO) Latching with Key Reset, DPST, 630	1.0
463NU	Narrow, Touch Sensor, Electronic Timer, Adjustable (1-40 seconds), SPDT, 630	1.0
463U	Single Gang, Touch Sensor, Electronic Timer, Adjustable (1-40 seconds), SPDT, 630	1.0
474U	Single Gang, No Touch Sensor, Electronic Timer, Adjustable (1-40 seconds), SPDT, 630	1.0
MD-31DB	Request-To-Exit (REX) PIR Motion Sensor, Black	1.0
MD-31DOW	Request-To-Exit (REX) PIR Motion Sensor, White	1.0

EMERGENCY DOOR RELEASES		Weight (lbs)
491	Emergency Break Glass Station, Blue	2.0
492	Emergency Pull Station, Blue	2.0
491-BB	Blue Surface Mount Back Box, 5¼" x 3¼" x 1½" (491)	2.0
492-BB	Blue Surface Mount Back Box, 4¾" x 3½" x 1⅝" (492)	2.0
491-GL4	Replacement Glass Plates, Quantity 4 (491)	1.0
492-GL4	Replacement Glass Rods, Quantity 4 (492)	1.0



491



492

LOW ENERGY OPERATORS		Weight (lbs)
AUTOS136V	Single Drive Unit, Single Swing Door, Push Arm, 36", 628	33.0
AUTOS136X	Single Drive Unit, Single Swing Door, Push Arm, 36", 710	33.0
AUTOS236V	Single Drive Unit, Single Swing Door, Pull Arm, 36", 628	33.0
AUTOS236X	Single Drive Unit, Single Swing Door, Pull Arm, 36", 710	33.0
AUTOS336V	Single Drive Unit, Single Swing Door, Push/Pull Arm Kit, 36", 628	36.0
AUTOP172V	Double Drive Unit, Swing Door Pair, Push Arms, 72", 628	62.0
AUTO-IR	Presence Sensing Door Re-Activator	3.0
AUTO-AEV	Push Arm Extension, 628	2.0
SP50	50mm Spindle	1.0
SP80	80mm Spindle	1.0



AUTOS136V



482A1U



48202U



482A4RU



480-1SB

PUSH PLATES & PANELS		Weight (lbs)
482A1U	Narrow Plate, PUSH TO OPEN, ISA Wheelchair, Blue Infill, SPDT, 630	1.0
482A2U	Single Gang Plate, PUSH TO OPEN, ISA Wheelchair, Blue Infill, SPDT, 630	1.0
482O2U	Single Gang Plate, PUSH TO OPEN, Black Infill, SPDT, 630	1.0
484A2U	Single Gang Plate, PUSH TO OPEN, ISA Wheelchair, Blue Infill, DPDT, 630	1.0
482A4U	Double Gang Plate, Square, PUSH TO OPEN, ISA Wheelchair, Blue Infill, SPDT, 630	1.0
482A4RU	Double Gang Plate, Round, PUSH TO OPEN, ISA Wheelchair, Blue Infill, SPDT, 630	1.0
484A4U	Double Gang Plate, Square, PUSH TO OPEN, ISA Wheelchair, Blue Infill, DPDT, 630	1.0
482O4U	Double Gang Plate, Square, PUSH TO OPEN, Black Infill, SPDT, 630	1.0
482AA36V	36" Push Panel, PUSH TO OPEN, ISA Wheelchair, Blue Infill, SPDT, 628	7.0
400RC433	433MHz One Channel Receiver	1.0
400W1-433	433MHz Micro Transmitter	1.0
482S-KIT	Wireless Push Plate Kit, Square Plates	5.0
482R-KIT	Wireless Push Plate Kit, Round Plates	5.0
480-1SB	Narrow Surface Box, Battery Clip, 1 3/4" x 4 9/16" x 1 3/4"	1.0
480-2SB	Single Gang Surface Box, Battery Clip, 2 3/4" x 4 1/2" x 1 5/8"	1.0
480-SFB	4 1/2" and 6" Square Flush Recessed Box, Battery Clip, Weatherized, 6 3/4" x 6 3/4" x 2 1/8"	2.0
480-SSB	4 1/2" and 6" Square Surface Box, Battery Clip, Weatherized, 5 1/2" x 5 1/2" x 2 1/8"	1.0

BOLLARDS		Weight (lbs)
BPS6SV	Surface Mount, Single Gang Prep, 6" x 6" x 42", 628	17.0
BPS6DV	Surface Mount, Double Gang Prep, 6" x 6" x 42", 628	17.0
BPS6PV	Surface Mount, Panel Prep, 6" x 6" x 42", 628	17.0
CBC482A4U	Surface Mount, CBC High-Low Prep, 6" x 6" x 42", 628 (Square Push Plates Included)	20.0

Push plates not included with BP series bollards, order separately. See page 12.

POWER TRANSFER DEVICES		Weight (lbs)
PTH-2+4Q	Hinge, Six Conductors, 626	2.0
PTH-2+4QDPS	Hinge, Six Conductors, 626, DPS	2.0
PTH-4Q	Hinge, Four Conductors, 626	1.0
PTH-4QDPS	Hinge, Four Conductors, 626, DPS	2.0
PTH-10Q	Hinge, Ten Conductors, 626	2.0
PT-2U	Loop, Surface Mount, 18" x 1/4" ID, Plastic End Caps, 630	1.0
PT-3V	Loop, Surface Mount, 20" x 1/4" ID, Aluminum Box End Caps, 628	1.0
PT-3/8V	Loop, Surface Mount, 20" x 3/8" ID, Aluminum Box End Caps, 628	1.0
PT-5	Loop, Concealed Mortise, 11 1/2" x 1" x 3/4"	1.0
PTM-2AL	Mortise Device, Two Conductors, 628	2.0
PTM-10AL	Mortise Device, Ten Conductors, 628	2.0
WPT	Wireless Device, Mortise, RF Transmission	1.0
7000-DGK	Laser Guided Door Core Wire Raceway Kit	11.0
7000-DB3/8	Evacuator Drill Bit, 3/8" x 50"	3.0




CBC482A4U



PTH-2+4Q



PT-2U



7000-DGK

POWER CONTROLLERS		Weight (lbs)
602RF	Regulated & Filtered Linear DC Power Controller with Cabinet, 1 Amp	9.0
602RFL	Regulated & Filtered Linear DC Power Controller less Cabinet, 1 Amp	3.0
631RF	Regulated & Filtered Linear DC Power Controller with Cabinet, 1.5 Amp	9.0
631RFA	Regulated & Filtered Linear DC Power Controller with Large Cabinet, 1.5 Amp	20.0
631RFL	Regulated & Filtered Linear DC Power Controller less Cabinet, 1.5 Amp	3.0
632RF	Regulated & Filtered Linear DC Power Controller with Cabinet, 2 Amp	9.0
632RFL	Regulated & Filtered Linear DC Power Controller less Cabinet, 2 Amp	3.0
634RF	Regulated & Filtered Linear DC Power Controller with Cabinet, 4 Amp	25.0
636RF	Regulated & Filtered Linear DC Power Controller with Cabinet, 6 Amp	25.0
TR12	Regulated 12VDC Plug-In Power Transformer, 1 Amp	2.0
TR24	Regulated 24VDC Plug-In Power Transformer, 1 Amp	2.0

Backup batteries not included, order separately. See page 14.




631RF



602RFL



TR12



UR4-8



RB12V4



EA-728V



EA100

DOOR CONTROLS & BACKUP BATTERIES

Weight (lbs)

UR-1	Universal Microprocessor Controller, Two Relays	1.0
UR2-4	Universal Microprocessor Controller, Four Relays	1.0
UR4-8	Universal Microprocessor Controller, Eight Relays	1.0
12VR	Voltage Regulating Sequencer	1.0
RB12V4	12V/5Ah Battery	4.0
RB12V4-2	12V/5Ah Battery, Quantity 2	8.0
RB12V7	12V/8Ah Battery	6.0

REMOTE CONTROL CONSOLES

Weight (lbs)

D15-2	Concealed Desk Switch, Momentary (MO), SPDT	1.0
--------------	---	-----

ANNUNCIATORS

Weight (lbs)

EA-SN	Door Prop Alarm, Single Gang, LED & Siren, 628	1.0
EA-728V	Door Prop Alarm, Double Gang, LED & Siren, Keylock Control, 628	1.0
EA-708V	Door Prop Alarm, Double Gang, LED & Siren, Mortise Key Cylinder Prep, 628	1.0
EA100	Multi-Mode Visual Annunciator	1.0
400U-SN	Alarm Siren, Single Gang, 630	1.0
400U-RMB	Alarm Buzzer, Single Gang, 630	1.0

ACCESSORIES & MISC		Weight (lbs)
EH201224A	Electromagnetic Door Holder, Semi-Flush, 12/24VAC/DC, 689	3.0
EH2024120A	Electromagnetic Door Holder, Semi-Flush, 24VAC/DC/120VAC, 689	3.0
EH301224A	Electromagnetic Door Holder, Surface, 12/24VAC/DC, 689	3.0
MC-4MU	Monitoring Switch, Concealed Magnetic Contact, SPDT, 628, DPS	1.0
MC-4	Monitoring Switch, Recessed Magnetic Contact, SPDT, DPS	1.0
MC-4PAK	Monitoring Switch Pack, Recessed Magnetic Contact, SPDT, DPS, Quantity 10	2.0
MC-7	Monitoring Switch, Recessed High Security Magnetic Contact, SPDT, DPS	1.0
MS-12	Monitoring Strike, Cylindrical, 2¾", SPDT, LS	1.0
MS-14	Monitoring Strike, Cylindrical, 4⅞", SPDT, LS	1.0
MS-16	Monitoring Strike, Mortise, SPDT, LS	1.0
MS-18	Monitoring Strike, Mortise, SPDT, BPS	1.0
MS-20	Monitoring Strike, Mortise, SPDT, LS/BPS	1.0
WRC-2B	433MHz Wireless Transmitter Pendant, Two Button	1.0
WRC-R2	433MHz Wireless Receiver, Two Channel	1.0
BR64XL	AC to DC Bridge Rectifier	1.0
CYL-6KAQ	Mortise Cylinder, 6-Pin, 1⅞" Length, Keyed Alike, 626	1.0
CYL-6KDQ	Mortise Cylinder, 6-Pin, 1⅞" Length, Keyed Different, 626	1.0



EH



WRC-2B



CYL-6KDQ

HAZARDOUS & EXPLOSION PROOF		Weight (lbs)
EP17624	Hazardous Electromagnetic Lock, 600lbs, 628, DPS	7.0
EP17624TJ	Hazardous Electromagnetic Lock with Top Jamb Mounting Kit, 600lbs, 628, DPS	10.0
EP493	Hazardous Emergency Pull Station, Blue	3.0
EP499	Hazardous Exit Switch, Mushroom Button, Momentary (MO), DPDT	3.0



EP499


COMPLETE COMPONENT CONSIDERATIONS

With a robust toolbox of over 35,000 SDC access & egress control components at your fingertips, you can assemble turnkey solutions to address both market-specific and application-specific requirements for almost any door opening imagined – while addressing a variety of factors, including:

- Level of Security
- Budget Restrictions
- Type of Door or Frame
- Life Safety Codes
- Aesthetics
- Retrofit or New Construction


BASIC COMPONENT CONSIDERATIONS FOR CONTROLLED DOOR SYSTEMS

- 1 LOCKING DEVICES
- 2 ACCESS CONTROLS
- 3 EGRESS CONTROLS
- 4 ADA CONTROLS
- 5 POWER TRANSFER DEVICES
- 6 POWER SUPPLY & DOOR CONTROLS
- 7 REMOTE CONTROLS & ANNUNCIATORS
- 8 ACCESSORIES & MISC

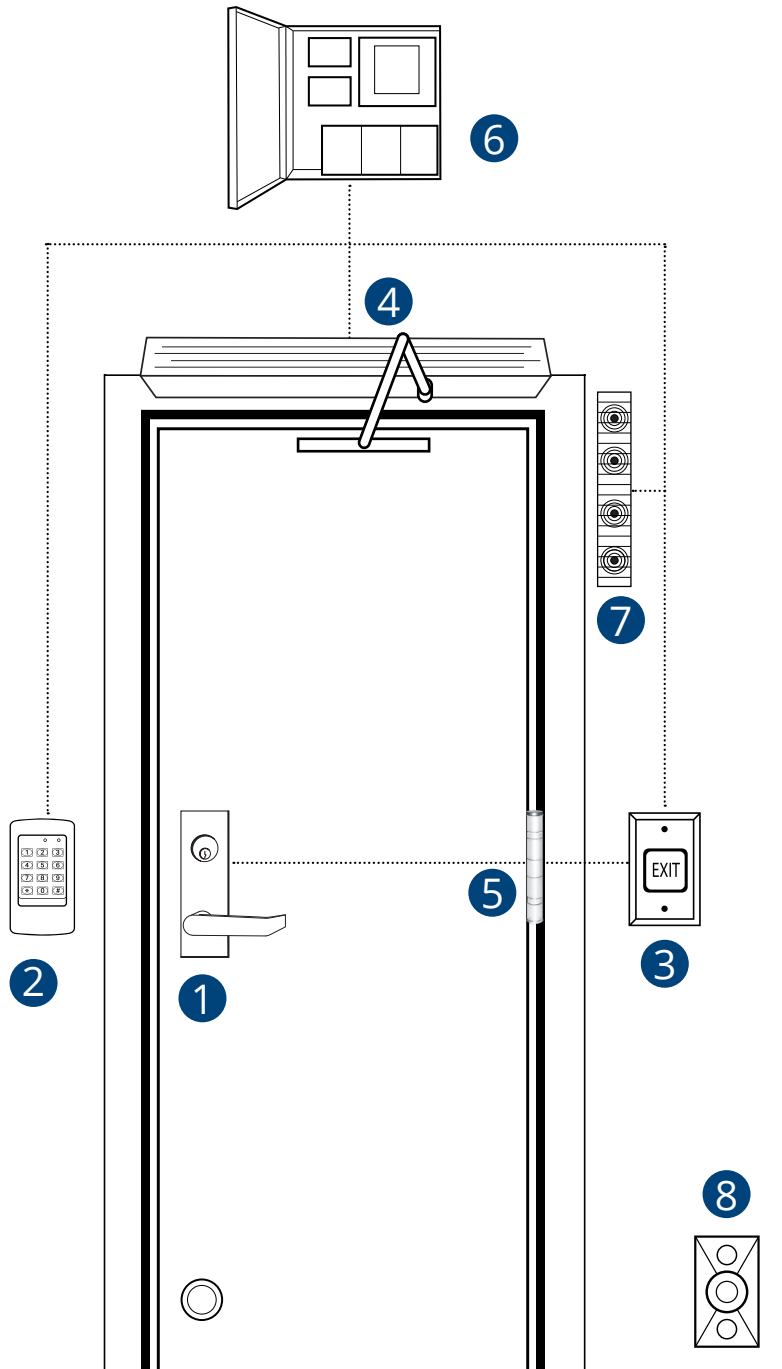


Components not to scale


1 LOCKING DEVICES




Electromagnetic Locks



Electromagnetic Shear Locks




Delayed Egress Locks




Electric Strikes



Electrified Locksets



Exit Devices & Retrofit ELR Kits




Electric Bolt Locks


2 ACCESS CONTROLS




IP-Based Controllers



Keypads & Readers



Standalone Locksets




Key Switches


3 EGRESS CONTROLS



Egress Devices




Exit Switches & Sensors




Emergency Door Releases

4 ADA CONTROLS



Low Energy Operators




Push Plates & Panels



Bollards


5 POWER TRANSFER DEVICES



Hinges



Loops




Mortise Transfer




Wireless Transfer

6 POWER SUPPLY & DOOR CONTROLS



Power Controllers



Door Controllers

7 REMOTE CONTROLS & ANNUNCIATORS



Remote Control Consoles




Door Prop Alarms & Annunciators

8 ACCESSORIES & MISC



Electromagnetic Door Holders



Door Position Monitoring



Latch & Deadbolt Monitoring Strikes



Wireless Transmitters & Receivers



Communicating Bathroom Controls

Check Out **SDC Online** For All Your Project Needs


Our fully featured website has all the information, solutions and tools you'll need, including:

- Data Sheets
- Installation Instructions
- Videos
- Priceshets
- Comparison Charts
- Document Library
- Solution Flyers
- UL Listings
- Image Library
- Cool Tools
- 3 Part Specs
- And More!

www.sdcsecurity.com



We're Here to Help

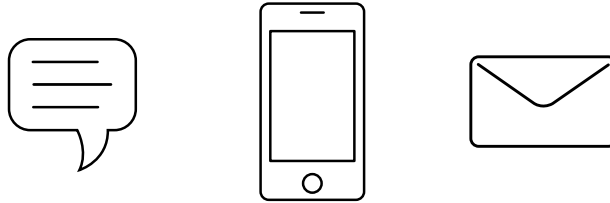

Our fully staffed customer service department, technicians and engineers are available to assist with your design, discuss an application and coordinate all phases of your order.

- Product, application and installation assistance
- Ordering assistance
- Price and delivery quotation
- Purchase order status

Customer Support Hours:

Monday – Friday, Pacific Standard Time

Technical Support	6:30am – 4:30pm
Return Authorizations	8:00am – 4:30pm
Sales	8:00am – 4:30pm
Invoices	8:00am – 4:30pm

Contact us by Mail:

Factory Mailing Address

P.O. Box 3670 Camarillo, CA 93011-3670, USA

Factory Shipping Address

801 Avenida Acaso, Camarillo, CA 93012, USA

Contact us by Phone:

(805) 494-0622

(800) 413-8783

USA Toll Free

Contact us by Email:

service@sdccsecurity.com



Waiting Sucks!

Security Dealers, Integrators, Installers and Distributors: Keep your copy of the shipQUICK inventory readily available so you know firsthand which products your SDC distributor can expedite for you. Check the SDC website periodically to download revised inventory list, product datasheets and more.



the lock behind the system
© 2023 Security Door Controls

LIT-BR_SQ_061523
sdcsecurity.com ■ 800.413.8783