

EntryCheck® E77

Standalone Electronic Exit Device



The EntryCheck® E77 Series include an SDC rim exit device and trim. The E77 lockset are an indoor/outdoor standalone electronic battery powered solution, providing controlled access for basic and multi-level high security requirements. The E77 locksets are keypad or PC software programmable, and combine multiple access technology with efficient motorized exit devices.



FEATURES


E77K and E77P:

- Keypad or PC Software Programmable
- 3,000 Users, 32 Temporary Users
- 4 to 6 Digit PIN Codes
- 3 Passage Mode Option
- 32 Access Groups, Schedules
- 32 Holidays
- 4 Authority Levels
- Keypad Tamper Lockout
- Mechanical Key Override
- Battery Powered (4AA)
- Blue Backlit Cast Metal Keys
- Weather & Vandal Resistant
- Retrofit Existing Lock Door Prep
- SDC S6100 Rim Exit Device
- Heavy Duty ANSI Grade 1

E77PS additional Features :

- Point-and-Click Microsoft PC-Based Software
- Supports Up to 1,000 Unique Doors
- Manage Individual Door Parameters, Access Schedules, User Groups, Holidays, Temporary Users
- Lock settings and related parameters are easily cloned to other locks, permitting quick multi-lock installations
- Data Import: All lock parameters and user data can easily be imported from existing databases, locks, or spreadsheets
- Database Backup Utility: Password protected SQL dbase may be saved on any PC
- Wireless Information Transfer: Lock programming and audit trail may be uploaded or downloaded using a

- Bluetooth enabled PC or laptop
- Audit Trail Information: Locks will maintain a record of the last 10,000 events to provide increased accountability. Audits may be downloaded to Excel spreadsheets where information is easily analyzed, sorted or printed
- User Entries Logged with Time and Date
- Remote Input Activation is Logged
- Door Forced/Door Ajar/Duress Alarms Are Logged
- User Reports: Users may be exported to Excel spreadsheets

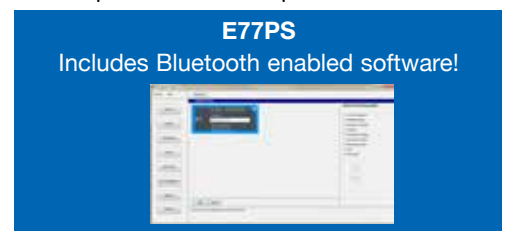



EXIT DEVICE FEATURES

- The SDC S6000 Spectra™ series panic and fire rated exit devices are UL listed and ANSI A156.3 Grade 1 compliant and comply with all national and state building and fire life safety codes. The SDC Spectra series exit devices has a modern look and quiet push pad operation.



EXIT DEVICE SPECIFICATIONS

Device Head Cover	Zinc Alloy or Stainless Steel
Chassis	Steel, Plated
Housing	Extruded Aluminum
Push Bar Base	Extruded Aluminum
Touch Plate	Stainless Steel
Mounting	Machine screws standard. Sex bolts optional. Order "SNB" for wood or non-reinforced metal doors
End Cap	Zinc Alloy
Hand	Non-Handed
Dogging	Allen-Type Key Furnished
Finish	630 Stainless Steel



KEYPAD SPECIFICATIONS

Power	4 Size AA Batteries (Alkaline) 100,000 cycles or External 12VDC Power @ 30mA
Inputs	1 Request to Exit 1 Door Position Switch
Output	1 Aux Relay Contacts SPDT 1A @ 30VDC
Temperature	-4°F to +140°F (-20°C to +60°C)
Humidity	5% to 95% non-condensing
Latch Bolt	9/16" Throw
Backset	2-3/4"
Strike	4-7/8" ANSI A115.2
Door Thickness	1-3/4" to 2-1/8"
PC Requirements	
Supported	Windows 7/8, 10
Operating Systems	(32-Bit and 64-Bit Systems)
Processor	2GHz or Faster Recommended
RAM	2GB or More Recommended
Hard Disk Space	1GB or More Recommended
Required	Windows Administrative Rights

PRODUCT SKU SAMPLE: E77P Q EK M61 P U 36



HOW TO ORDER

ENTRYCHECK™ E77 SERIES

1| SPECIFY MODEL

- E77K** Digital Keypad Only, with SDC S6100 Exit Device
- E77P** Digital Keypad with Prox Reader, with SDC S6100 Exit Device
- E77PS** Digital Keypad with Prox Reader and Software, with SDC S6100 Exit Device

2| SPECIFY KEYPAD FINISH

- Q** 626 Dull Chrome (Standard)
- B** Black

3| SPECIFY ELECTRIC TRIM

- EK** Eclipse Style Electric Trim Less Mortise Cylinder, Stainless Steel Finish
- GK** Galaxy Style Electric Trim Less Mortise Cylinder, Stainless Steel Finish



EKM Eclipse, Less Cylinder



GKM Galaxy Less Cylinder

CYLINDER OPTION FOR TRIM

- CYL-6KDQ** 6 pin, 1-1/8" Mortise Cylinder, Keyed different, 626 Dull Chrome
- CYL-6KAQ** 6 pin, 1-1/8" Mortise Cylinder, Keyed alike, 626 Dull Chrome

4| SPECIFY SPECTRA SERIES EXIT DEVICE

- M61** Rim Mount Exit Device



5| SPECIFY PANIC OR FIRE RATED

- P** Panic Exit Device
Mechanical Dogging STD. See Part # CD for Optional Key Cylinder Dogging
- F** Fire Exit Device
Mechanical Dogging Not Available

6| SPECIFY EXIT DEVICE FINISH

- U** 630 Dull Stainless Steel

7| SPECIFY EXIT DEVICE LENGTH

- 36** For 36" Door N/C
- 42** For 42" Door
- 48** For 48" Door

