


# SDC Security Door Controls

801 Avenida Acaso, Camarillo, Ca. 93012 • (805) 494-0622 •  
 www.sdcsecurity.com • E-mail: service@sdsecurity.com

## INSTALLATION INSTRUCTIONS LR100ARK ADAMS RITE ELECTRIC LATCH RETRACTION DEVICE KIT NARROW STILE RIM EXIT DEVICE 8800 SERIES (FOR ALUMINUM DOORS)

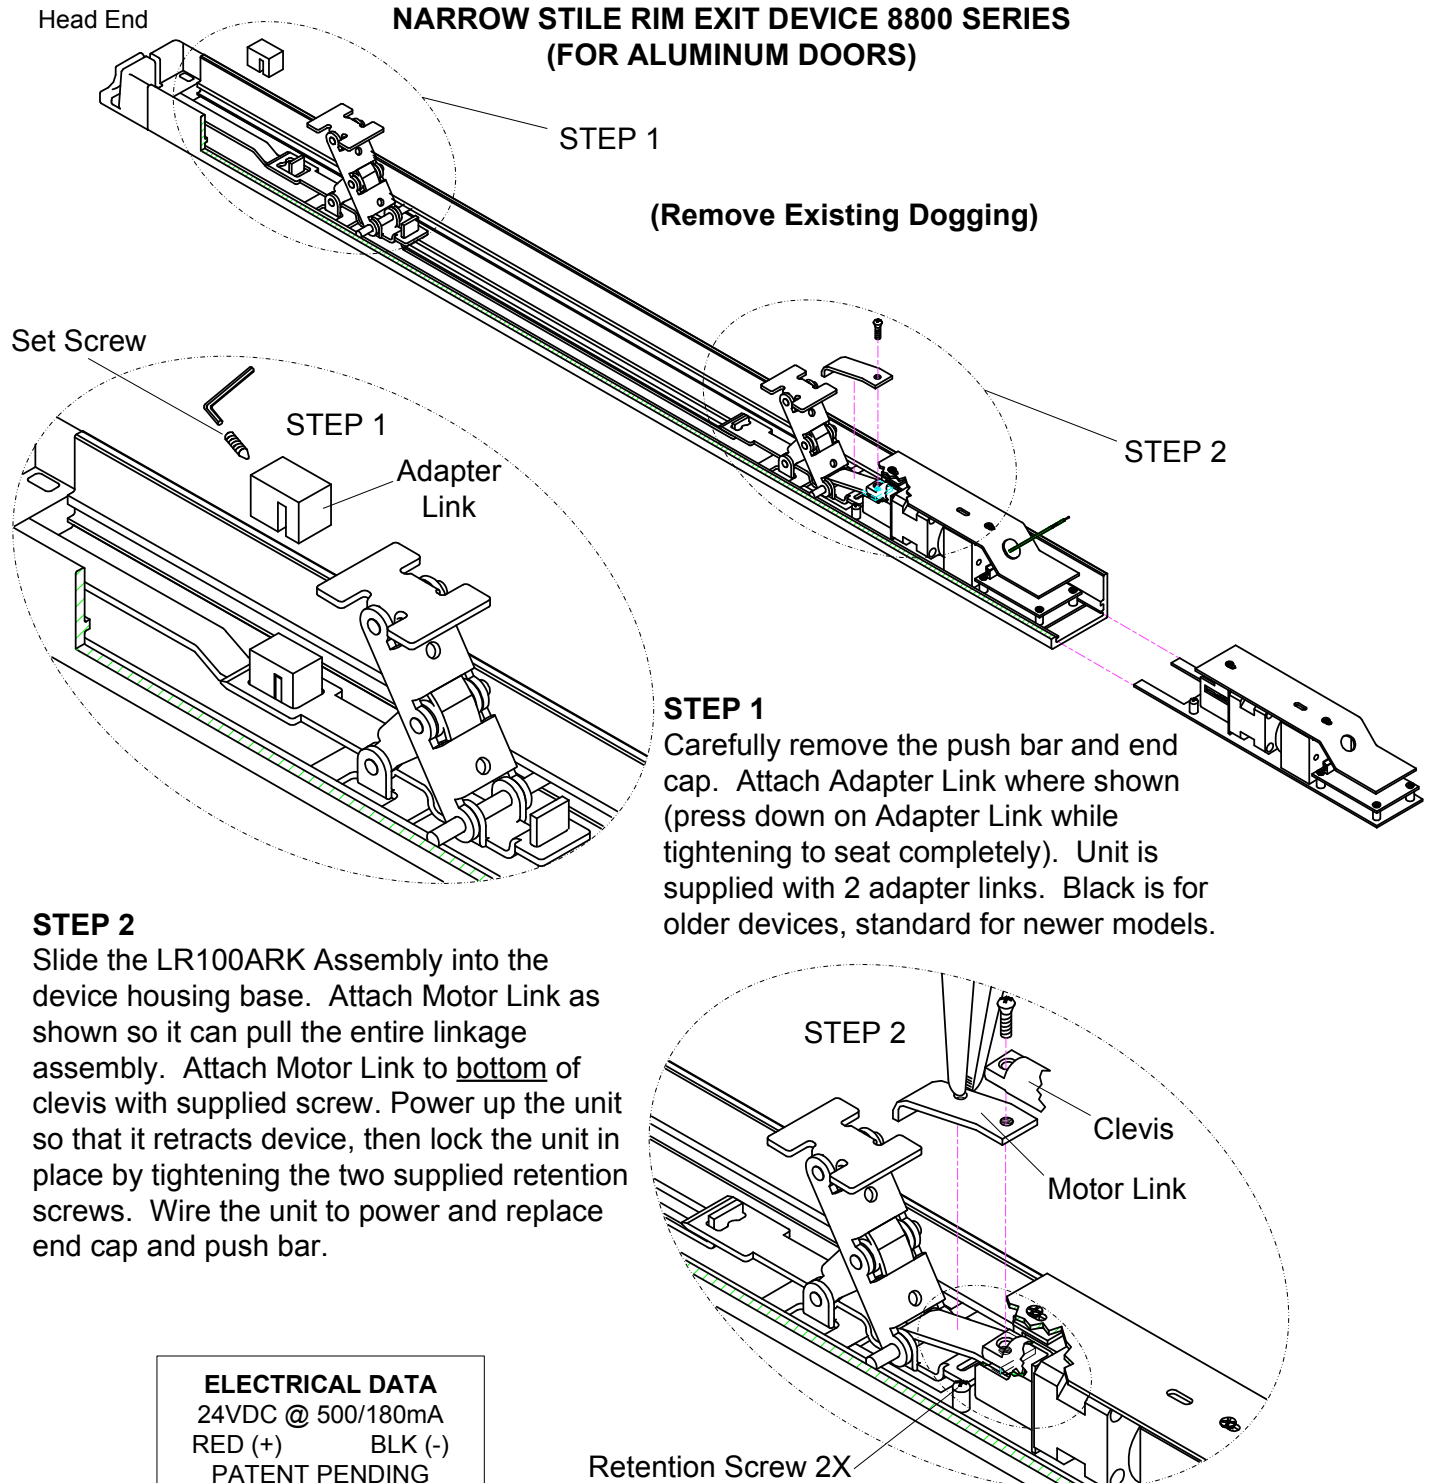

**(Remove Existing Dogging)**

### STEP 2

Slide the LR100ARK Assembly into the device housing base. Attach Motor Link as shown so it can pull the entire linkage assembly. Attach Motor Link to bottom of clevis with supplied screw. Power up the unit so that it retracts device, then lock the unit in place by tightening the two supplied retention screws. Wire the unit to power and replace end cap and push bar.

### STEP 1

Carefully remove the push bar and end cap. Attach Adapter Link where shown (press down on Adapter Link while tightening to seat completely). Unit is supplied with 2 adapter links. Black is for older devices, standard for newer models.

**ELECTRICAL DATA**  
 24VDC @ 500/180mA  
 RED (+)      BLK (-)  
 PATENT PENDING

Any suggestions or comments to this instruction or product are welcome. Please contact us through our website or email engineer@sdsecurity.com